



TC101: 09/24

MOTORIZED PULLEYS FOR BELT CONVEYORS

BULK HANDLING
GENERAL CATALOG




RULMECCA®

MOVING AHEAD



Rulmeca Motorized Pulley Cut-away View

Summary of Key Benefits

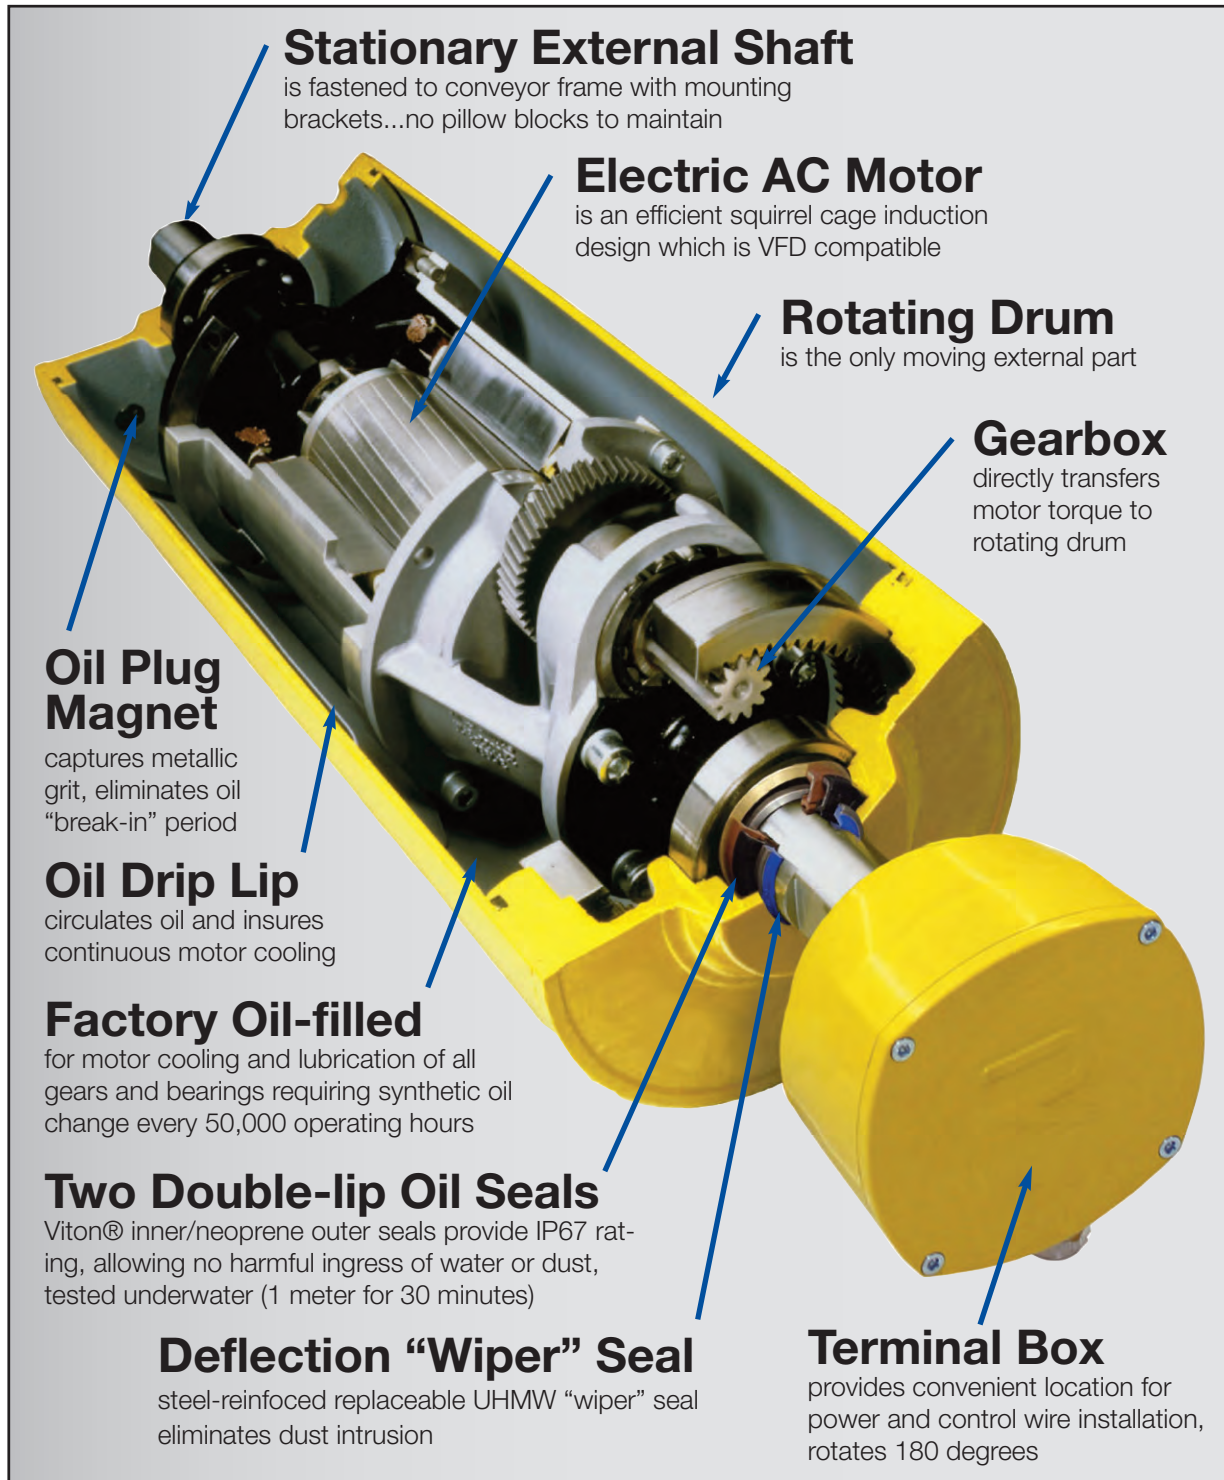

Cut away view of Motorized Pulley Model 220M.



Table of Contents

Rulmeca Motorized Pulley Cut-away View and Summary of Key Benefits.....	cover
Table of Contents	1
Rulmeca Motorized Pulleys - Introduction & General Description	2
Features and Benefits of Rulmeca Motorized Pulleys	3
Bulk Handling Engineering Principles	4
Application Worksheet	5
Model 138LS (5.45" diameter) specifications.....	6-11
Model 165LS (6.49" diameter) specifications.....	12-17
Model 220M & 220H (8.50" diameter) specifications	18-26
• Ordering Information	27
Model 320M & 320H (12.64" diameter) specifications.....	28-36
• International Protection - IP ratings	37
Model 400M & 400H (15.91" diameter) specifications.....	38-44
• Motorized Pulley Options: "Lagging"	45
Model 500M & 500H (19.72" diameter) specifications.....	46-51
• Mounting Orientations	52
• Hopper Feeder Drives	53
• Dual Drives and Load Sharing	54
• Bucket Wheel Conveyor Drives	55
• Mobile Crushing/Screening Plant Conveyor Drives	56
• Conveyor Tail Drives	57
• Labrynth Shaft Seals	58
• Motorized Pulley Options: "Backstops & Brakes"	59
Model 630M & 630H (24.80" diameter) specifications.....	60-65
Model 800M & 800H (31.50" diameter) specifications.....	66-73
Model 1000HD (40.16" diameter) specifications	74-76
• Variable Frequency Drives	77
Special Environmental Conditions	78-79
Technical Precautions for Design, Installation and Maintenance.....	80-90
• Checking and Changing Oil.....	91
Oil Quantities and Oil Types.....	92-93
Electrical Connection Diagrams - 138LS - 1000HD	94-101



Rulmeca Motorized Pulleys: a new name with deep roots

The Rulmeca Motorized Pulleys presented in this catalogue have a long history, beginning in the 1950's, when the product was developed in Germany and Denmark.

Eventually, through a merging process the German Förder und Antriebstechnik Aschersleben GmbH and the Danish John Kirkegaard Maskinfabrik A/S became partners in the Interroll Group.

From the early 1990's the manufacturing

of all BULK Motorized Pulleys were centralized in Aschersleben, Germany.

In July 2003 Rulli Rulmeca S.p.A. purchased the production facility in Germany, where Motorized Pulleys have been developed and produced for almost half a century.

Today this plant, renamed Rulmeca Germany GmbH, continues the JOKI tradition for quality and reliability under the Rulmeca brand.

With this long history Rulmeca is a very experienced manufacturer of BULK Motorized Pulleys, offering the world's largest product range.

General Description

The Rulmeca Motorized Pulley was first produced in 1953 specifically for use on conveyor belt applications.

Until recently it was known as the JOKI Motorized Pulley or JOKI drum motor.

The objective was to produce a compact, hermetically sealed, highly efficient conveyor drive unit that would be unaffected by dust, water, oil, grease or other harmful substances. A Motorized Pulley that would be quick and simple to install and require virtually no maintenance.

The Rulmeca Motorized Pulley achieved this objective and today is considered to be one of the most reliable, effective and safe conveyor drive systems available throughout the world.

The Rulmeca Motorized Pulley is a highly efficient geared motor drive, which is hermetically sealed within a steel cylindrical shell.

The shell, which is normally crowned to ensure belt tracking, is fitted with bearing housings incorporating precision bearings and double lipped oils seals and rotates on a pair of fixed shafts.

The motor stator is fixed to the shafts and the motor winding cables pass through one of the shafts, eliminating the need for slip rings and brushes.

The squirrel cage induction motor, manufactured in steel laminate, is machined concentric to high tolerances and designed to give 200% starting torque for 3 phase versions.

The rotor pinion is coupled directly to the gearbox.

The gearbox transmits torque to the shell through a geared rim and allows very little frictional torque loss.

The Motorized Pulley is filled with oil, which acts as a lubricant and coolant. Heat is dissipated through the shell and conveyor belt.

All vital parts are CNC machined.

The Rulmeca Motorized Pulley is supplied as standard with:

- Machined mild steel crowned shell.
- Electric motor manufactured in accordance with IEC 34-1 (EN60034-1), (VDE 0530).
- Class F insulation according to IEC 34-1 (EN60034-1), (VDE 0530).
- Most international voltages.
- Stan. voltages supplied with +/-10% tolerance in accordance with IEC 38.
- Factory oil filled and tested.
- Degree of protection IP66/67 (EN60034-5).
- Motorized Pulleys are labelled in compliance with the Safety norm ANSI 535.4 and ISO 3864-2.

Rulmeca Motorized Pulleys are manufactured according to the Council Directives of the European Communities.

The CE-marking is according to Directive 73/23/EEC relating to electrical equipment and according to Directive 89/336EEC relating to electrical magnetic compatibility and amendments.



Features and Benefits of Rulmeca Motorized Pulleys

Purpose-built design

The Rulmeca Motorized Pulley has been specifically designed for belt conveyors.

Hermetically Sealed

The motor, gearbox and bearings are hermetically sealed inside a steel shell. Therefore they are unlikely to fail due to harmful environmental conditions such as water, dust, grit, chemicals, grease, oil, etc.

Space saving design

Because the drive unit and the bearings are mounted inside the Motorized Pulley shell, it requires much less room than an exposed drive. No need for costly extras like chains, v-belts, couplings, bearings, support structure and special guarding.

Safety

The Rulmeca Motorized Pulley is one of the safest drives available because the motor is completely enclosed and the external shafts are always stationary. The only moving external parts are the Motorized Pulley shell and bearing housings.

Low purchasing and installation cost

The Rulmeca Motorized Pulley is quite often less expensive than exposed drives because it has fewer parts. Therefore less conveyor design time and parts purchasing costs. It is also much quicker and easier to install - certainly less than a quarter of the time taken to fit an exposed system.

Low maintenance cost

The end user also benefits from the Rulmeca Motorized Pulley, because it requires no maintenance other than the recommended oil change every 50,000 operating hours for synthetic oil and oil seal change every 30,000 operating hours. That equates to 8 years between oil

changes based on a 24 hrs/day and 7 day/week operating schedule. Standard oil is also available requiring an oil change every 10,000 operating hours.

Efficiency

The Rulmeca Motorized Pulley usually has a much higher efficiency from electrical motor to shell (Pulley face) than exposed drives, because it has fewer frictional losses. Therefore, efficiencies of up to 97% can be achieved.

Cleanliness

Because the Rulmeca Motorized Pulley is hermetically sealed it cannot contaminate any conveying materials such as food, electrical components, plastics and other materials that must be kept perfectly clean during handling.

Aesthetic appearance

If installed correctly the Rulmeca Motorized Pulley always looks good. Due to its compact size and smooth lines, the Motorized Pulley is out of sight, because it is hidden within the conveyor frame.

Thermal protection

All three phase Rulmeca Motorized Pulleys are protected by our thermal protection switches. These heat-sensitive switches are built into the motor windings to protect the motor from overheating. The thermal protectors must be connected to a normally closed control circuit in order to protect the motor.

Weight saving and distribution

The Rulmeca Motorized Pulley is often lighter than exposed drives. It is possible to reduce the weight and cost of the conveyor structure, because the conveyor drive weight is evenly distributed within the conveyor frame.

Variable frequency drive

All Rulmeca Motorized Pulleys with 3 phase motors are easily controlled by variable frequency drives working in the 12 Hz to 66 Hz frequency range. See Technical Precautions in the catalogue.

Fewer parts

A Rulmeca Motorized Pulley consists of the Motorized Pulley and two fixing brackets! Exposed drives can require up to eight or more separate components, most of which have to be purchased from different suppliers or custom manufactured.

Low noise

Thanks to the totally sealed enclosure and high quality gears the Rulmeca Motorized Pulley runs almost at a whisper – a very important fact in today's modern factory environments.

The Rulmeca Motorized Pulley – the ideal drive unit for conveyors “Fit it and forget it!”



Bulk Materials Handling Engineering Principles

Introduction

Designers should use the following engineering principles in selecting the optimal belt conveyor drive for bulk handling applications. Refer to the latest edition of "Belt Conveyors for Bulk Materials," published by the Conveyor Equipment Manufacturers Association (CEMA) for a comprehensive design guide.

Design Parameters

Determine desired design parameters:

- product flow rate (Q)
- belt speed (V)
- belt width (w)
- conveyor length (L)
- product size
- lift height (H)
- type & thickness of belt
- type of belt support

Make the following control choices:

- continuous or intermittent flow
- fixed or variable belt speed
- conveyor duty cycle
- extremes of process flow
- ambient environment extremes
- applicable safety requirements

Optimize Belt Speed & Belt Width

Select Belt Width:

- with bulk density & belt speed fixed, select width to yield product flow rate, not exceeding CEMA "standard edge distance"
- width must be $\geq 3x$ max lump for 20° surcharge and $\geq 6x$ max lump for 30° surcharge
- width must be wide enough to prevent loading chute and skirtboard jamming (i.e. $\geq 3x$ to $5x$ max lump)

Select Belt Speed:

- with bulk density & width fixed, select speed to yield product flow rate, not exceeding CEMA "standard edge distance"
- for dusty material, select speed to minimize fugitive emissions
- for heavy sharp material, select speed to protect belt and chute lining

Calculate Power to Drive Belt

CEMA has empirically developed a variety of factors to simplify the determination of belt pull. Some of these factors include: idler roller bearing friction (Kx,) belt and load flexure resistance (Ky,) and skirtboard friction (Tsb.) To determine required HP calculate required belt pull at specified belt speed as follows:

- with belt width and speed fixed, select conveyor components and calculate belt tension (Te) required to overcome gravity, friction, and momentum using:

$$Te = LKt (Kx + KyWb + 0.015Wb) + Wm (LKy + H) + Tp + Tam + Tac$$

- calculate power required to drive belt using:

$$HP = (TeV) / 33,000$$

Contact sales-us@rulmeca.com for free conveyor design software incorporating equations above and a complete set of definitions for all pertinent terminology.

Select Drive & Check Geometry

Finally, select conveyor drive and check design using final parameters as follows:

- select Motorized Pulley to match design belt speed and required HP
- check selected pulley diameter verifying that wrap factor and belt life are acceptable
- recalculate required belt pull and HP using selected "actual belt speed"
- check material cross section on belt verifying that edge distance is acceptable
- check material trajectory verifying that transfer chute will not plug and material will drop at desired location

Contact sales-us@rulmeca.com for free conveyor design software incorporating material cross section and trajectory plotting programs and pulley diameter check.

Special Loading Conditions

Certain loading are beyond the scope of the 5th Edition of the CEMA manual.


These include:

- hopper feeder conveyors
- slider bed conveyor supports
- cleated and/or sidewall belt



Contact sales-us@rulmeca.com for free conveyor design software incorporating HP calculations for these special conditions.

Examples

The drawings below were generated by Rulmeca design software and illustrate how the programs can help designers avoid errors.

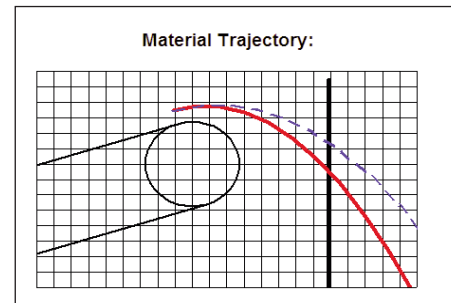

Trajectory plot shows that slower belt speed (solid line) will not plug chute while faster belt speed (dotted line) will. This is because trajectory of center of material mass impacts against vertical chute wall above horizontal centerline of pulley.

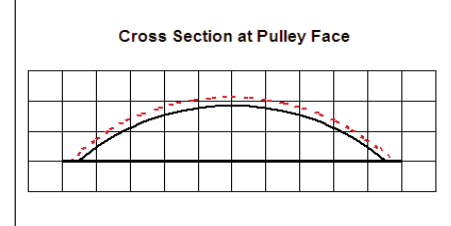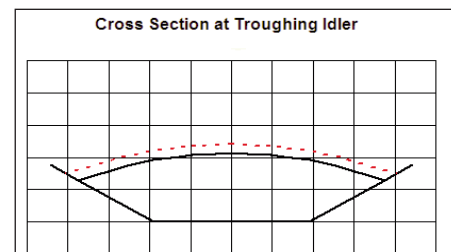

Plot shows that selected belt speed (dotted line) may cause material spillage because cross section exceeds CEMA recommendation (solid line.)



APPLICATION WORKSHEET - BULK MATERIALS HANDLING

Motorized Pulleys

Complete this form and submit to Rulmeca for a power calculation and Motorized Pulley recommendation.

Contact Person _____ **Date** _____ **Ref #** _____
Company _____
Address _____
Phone _____ **Fax** _____ **Email** _____

Standard Loading Conditions:

Conveyor Length (ft) _____
 Tonnage Rate (tph) _____
 Belt Speed (fpm) _____
 Material Lift Height (ft) _____
 Ambient Temperature (°F) Min _____
 Ambient Temperature (°F) Max _____
 Initial Velocity of Material (fpm) _____
 Number of Belt Cleaners _____
 Number of Belt Plows _____
 Length of Skirt Zone (ft) _____
 Depth of Material in Skirt Zone (in) _____
 Number of Non-driven Pulleys _____

Elevation (ft)		Idler Roll Diam. (in)		Type of Lagging	
<input type="checkbox"/>	3,300	<input type="checkbox"/>	3	<input type="checkbox"/>	Full
<input type="checkbox"/>	5,000	<input type="checkbox"/>	4	<input type="checkbox"/>	Partial
<input type="checkbox"/>	6,600	<input type="checkbox"/>	5	<input type="checkbox"/>	None
<input type="checkbox"/>	6,600	<input type="checkbox"/>	6	<input type="checkbox"/>	
Belt Width (in)		CEMA Type		Type of Take-up	
<input type="checkbox"/>	18	<input type="checkbox"/>	A	<input type="checkbox"/>	Automatic
<input type="checkbox"/>	24	<input type="checkbox"/>	B	<input type="checkbox"/>	Manual
<input type="checkbox"/>	30	<input type="checkbox"/>	C	<input type="checkbox"/>	
<input type="checkbox"/>	36	<input type="checkbox"/>	D	<input type="checkbox"/>	
<input type="checkbox"/>	42	<input type="checkbox"/>	E	<input type="checkbox"/>	
<input type="checkbox"/>	48	Troughing Idler Spacing (ft)		Angle of Wrap (deg)	
<input type="checkbox"/>	54				
<input type="checkbox"/>	60	<input type="checkbox"/>	180	<input type="checkbox"/>	180
<input type="checkbox"/>	66	<input type="checkbox"/>	200	<input type="checkbox"/>	200
<input type="checkbox"/>	72	<input type="checkbox"/>	210	<input type="checkbox"/>	210
<input type="checkbox"/>	84	<input type="checkbox"/>	220	<input type="checkbox"/>	220
<input type="checkbox"/>	96	<input type="checkbox"/>	240	<input type="checkbox"/>	240
<input type="checkbox"/>	Other	<input type="checkbox"/>	360	<input type="checkbox"/>	360
<input type="checkbox"/>		<input type="checkbox"/>	3.0	<input type="checkbox"/>	
<input type="checkbox"/>		<input type="checkbox"/>	3.5	<input type="checkbox"/>	
<input type="checkbox"/>		<input type="checkbox"/>	4.0	<input type="checkbox"/>	
<input type="checkbox"/>		<input type="checkbox"/>	4.5	<input type="checkbox"/>	
<input type="checkbox"/>		<input type="checkbox"/>	5.0	<input type="checkbox"/>	
Type of Belt					
<input type="checkbox"/>	1 ply, 160 piw				
<input type="checkbox"/>	2 ply, 225 piw				
<input type="checkbox"/>	3 ply, 330 piw				
<input type="checkbox"/>	4 ply, 440 piw				
Belt Carcass					
<input type="checkbox"/>	fabric				
<input type="checkbox"/>	steel cord				

Material (frictional coefficient)	
<input type="checkbox"/>	ashes, coal, dry 0.0571
<input type="checkbox"/>	bauxite, ground 0.1881
<input type="checkbox"/>	cement, Portland, dry 0.2120
<input type="checkbox"/>	cement clinker 0.1228
<input type="checkbox"/>	clay, ceramic, dry fines 0.0924
<input type="checkbox"/>	coal, bituminous mined 0.0754
<input type="checkbox"/>	coke, ground fine 0.0452
<input type="checkbox"/>	cullet (broken glass) 0.0836
<input type="checkbox"/>	grains, wheat, corn, rye 0.0433
<input type="checkbox"/>	gravel, bank run 0.1145
<input type="checkbox"/>	iron ore, 200 lbs/cu ft 0.2760
<input type="checkbox"/>	limestone, pulverized dry 0.1280
<input type="checkbox"/>	phosphate rock, dry 0.1086
<input type="checkbox"/>	salt, common, dry fine 0.0814
<input type="checkbox"/>	sand, dry, bank 0.1378
<input type="checkbox"/>	wood chips 0.0095
Material Bulk Density (pcf)	
<input type="checkbox"/>	ashes, coal, wet 50
<input type="checkbox"/>	bagasse 10
<input type="checkbox"/>	bark, wood 20
<input type="checkbox"/>	bauxite, ground, dry 68
<input type="checkbox"/>	bauxite, crushed 85
<input type="checkbox"/>	beans, navy, dry 48
<input type="checkbox"/>	beets, whole 48
<input type="checkbox"/>	borax, 3" & under 70
<input type="checkbox"/>	cement, portland 99
<input type="checkbox"/>	clay, ceramic, dry, fines, 80
<input type="checkbox"/>	clay, dry, fines 120
<input type="checkbox"/>	coal, bituminous 55
<input type="checkbox"/>	coal, lignite 45
<input type="checkbox"/>	coke, 45
<input type="checkbox"/>	corn, ear, 56
<input type="checkbox"/>	cullet, 120
<input type="checkbox"/>	gravel, bank run, 100
<input type="checkbox"/>	iron ore, 200 130
<input type="checkbox"/>	iron ore pellets 130
<input type="checkbox"/>	limestone, crushed 90
<input type="checkbox"/>	paper pulp stock 60
<input type="checkbox"/>	phosphate rock 85
<input type="checkbox"/>	potash salts 80
<input type="checkbox"/>	rock, crushed, 145
<input type="checkbox"/>	rock, soft, 110
<input type="checkbox"/>	rye, 46
<input type="checkbox"/>	sale, common dry, fine, 80
<input type="checkbox"/>	sand, bank, damp, 130
<input type="checkbox"/>	sand, bank, dry, 110
<input type="checkbox"/>	sand, foundry, 100
<input type="checkbox"/>	sawdust 13
<input type="checkbox"/>	sewage sludge, moist, 55
<input type="checkbox"/>	soybeans, whole, 50
<input type="checkbox"/>	sugar, raw, cane, 65
<input type="checkbox"/>	taconite pellets 130
<input type="checkbox"/>	traprock, 2-3" lumps, 110
<input type="checkbox"/>	wheat, cracked, 45
<input type="checkbox"/>	wood chips 30

Operating Conditions:

Duty Cycle (Start/stops per hour) _____
 Hours of Operation (hrs/day) _____
 Days of Operation (days/week) _____
 Is this a reversing belt? _____
 Additional Comments: _____

Special Loading Conditions:

Hopper Feeder Parameters:

Hopper Opening Width (in) _____
 Hopper Opening Length (in) _____

Slider Bed Parameters:

Slider Bed Length (ft) _____

Slider Bed Material (frictional coefficient)		
<input type="checkbox"/>	steel	0.90
<input type="checkbox"/>	UHMW polyethylene	0.545
<input type="checkbox"/>	urethane	0.88
<input type="checkbox"/>	wood	1.00

Sidewall & Cleated Belt Parameters:

Sidewall & cleat height (in) _____
 Thickness of sidewall (in) _____
 Distance between cleats (in) _____
 Thickness of cleats (in) _____

Tripper Design Parameters:

Tripper Length (ft) _____
 Tripper Material Lift Height (ft) _____
 Number of Tripper Belt Cleaners _____
 Tripper Skirt Zone Length (ft) _____
 Depth of Material in Skirt Zone (in) _____
 No. of Tripper Non-driven Pulleys _____

For free conveyor drive power calculation program, complete with definitions of all terminology, contact:
sales-us@rulmeca.com.



Motorized Pulley 138LS, Ø 5.45 in. (138 mm)

Motorized Pulley 138LS, with machined helical gearbox, performs with a gearbox efficiency of 95% of nominal power, in a compact diameter of 5.45 inches. With a minimum roller length (RL) of 11.81” and powers ranging from 0.13 to 1.0 HP, this Motorized Pulley is suitable for most small diameter applications. These include:

- Light agricultural conveyors
- Light C & D debris conveyors
- Mobile and portable conveyors

Motorized Pulley 138LS features a standard enclosure class of IP66/67 and is also available in stainless steel for wash down applications.

STANDARD SPECIFICATION of Motorized Pulley

- Crowned mild steel 5.45” shell treated with anti-rust wax
- Die cast aluminum bearing housing
- Mild steel shaft treated with anti-rust wax
- Die cast lightweight aluminum gearbox housing
- Sealing system – degree of protection IP66/67 (EN60034-5.) See page 37.
- Compact die cast aluminum terminal box with WAGO connectors
- Voltage: All common voltages available. Please specify.
- Three phase induction motor
- One out of two oil plugs is fitted with a magnet to filter the oil.
- Motor winding insulation class F
- Dynamically balanced rotor
- Oil change recommended every 50,000 operational hours for synthetic oil and 10,000 operational hours for standard oil.
- Maximum RL 70.87”
- Non standard RL lengths available
- Single phase is available in 0.33, 0.50, and 0.75 HP, supplied with a running capacitor
- To be used in the horizontal position only.

STAINLESS STEEL options

TS8N

- Stainless steel shell – AISI 304 range
- Stainless steel shafts – AISI 303 range
- Stainless steel covered aluminum bearing housings – AISI 304 range
- Stainless steel oil plugs with magnet – AISI 304 range
- Compact stainless steel terminal box – AISI 304 range
- Alternatively, straight stainless steel connector – AISI 303 range with power cord.
- Regreasable stainless steel seals – AISI 303 range
- Degree of protection IP66/67 (EN60034-5.) See page 37.
- FDA & USDA food grade grease
- Option: FDA & USDA food grade recognized oil.
- Special mounting brackets are available

Please note:

- **Noise-sensitive Areas:** High speed 2-pole motors can cause higher noise levels and are not recommended for noise-sensitive areas
- **Technical Precautions for Design, Installation, and Maintenance:** pages 80-90
- **Environmental Considerations:** pages 78-79
- **Optional Extras:** pg 7
- **Electrical Connection Diagrams:** pages 94-101



OPTIONAL EXTRAS

Motorized Pulley 138LS

Specification	Availability	
Total stainless steel option AISI 304 range	TS8N with regreasable labyrinth seals	x
Food grade oil & grease - FDA & USDA recognized		x
Dust explosion proof Motorized Pulleys - ATEX 95 - Zone 22 - for applications handling dusty grain etc. According to European Directive 94/9/EC.		x
Total acid resistant stainless steel option - AISI 316		x
Black rubber lagging - Standard specifications (See page 80.) 1/8" smooth lagging - Hardness 60 ±5 Shore A		o
White smooth rubber lagging (FDA). Oil, fat & grease resistant		o
Special lagging (e.g. hot vulcanized)		o
Electromagnetic brake	Min. RL increases by 1.97"	x
Mechanical backstop	Min. RL does not increase with backstop option	x
Modified for vertical mounting		o
Modified for mounting between 5° and 90° (e.g. for magnetic separators)		o
Insulation class F with standard oil: (Allowable ambient temperature: -13°F/+104°F)		Std.
Insulation class H with synthetic oil: (Allowable ambient temperature: -13°F/+120°F)		x
Special motors for applications with no belt contact		o
Low noise drives for noise sensitive areas		x
Parallel shell		x
Thermal protector		Std.
IP66/67 Compact unpainted aluminum terminal box		Std.
IP66/67 Compact stainless steel terminal box- AISI 304 or 316 range		x
Straight or elbow connector with standard power cord		x
Straight connector with screened power cord	(See page 77 for VFD precautions)	x
Straight connector with standard power cord	(Stainless steel in AISI 304 range)	x
Voltage: single voltage (460) stator (Y winding) wired for 460v/3ph/60 Hz at terminal box		Std.
single voltage (230) stator (YY winding) wired for 230v/3ph/60 Hz at terminal box		x
2 speed motors		x
Special voltage motors		x
Single phase motors		o
CSA approved motors		x

x = Optional extras


o = An option with certain limitations. Please refer to Technical precautions pages 80-90.

Std. = Fitted as standard




Motorized Pulley 138LS, Ø 5.45 in. (138 mm)

Motorized Pulley with Terminal box

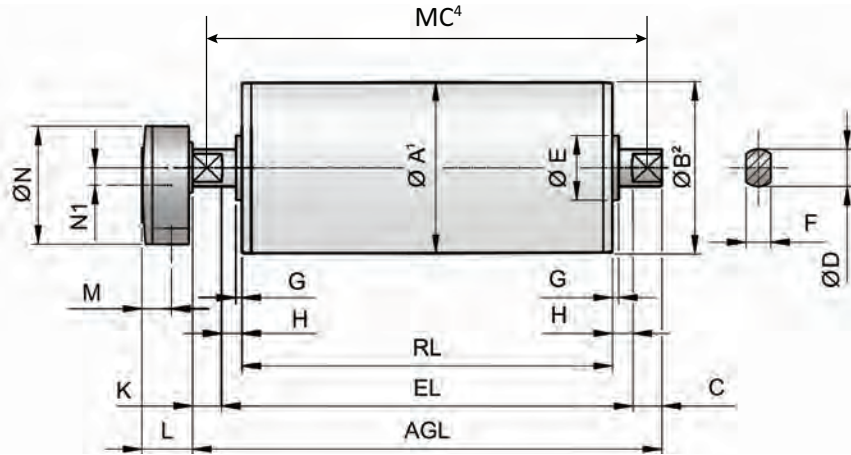


Straight connector Elbow connector TS8N version³

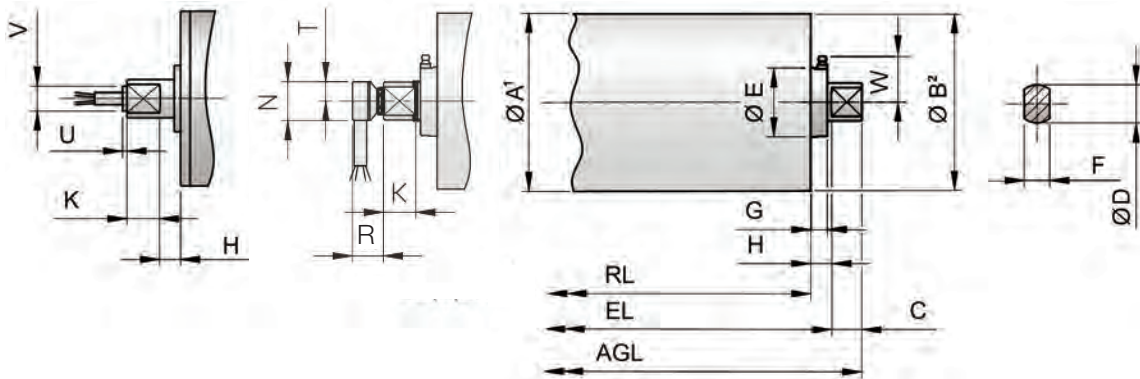

Version	Dimensions										Compact terminal box				Straight connector		Elbow connector		
	A in	B in	C in	D in	E in	F in	G in	H in	K in	W in	L in	M in	N in	N1 in	U in	V in	N in	R in	T in
Standard	5.45	5.39	0.93	1.18	2.13	0.79	0.20	0.65	0.93	-	1.61	0.95	3.74	0.55	0.14	0.77	1.18	0.85	0.59
TS8N	5.45	5.39	0.93	1.18	2.13	0.79	0.53	0.65	0.93	1.42	1.61	0.95	3.74	0.55	0.14	0.77	1.18	0.85	0.59

- 1 A dimension is outer diameter of crowned unlagged pulley shell at pulley centerline.
- 2 B dimension is outer diameter of crowned unlagged pulley shell at each end of shell.
- 3 Pulley shown is TS8N version with regreasable seals.
- 4 Mounting centers = MC = RL + W1

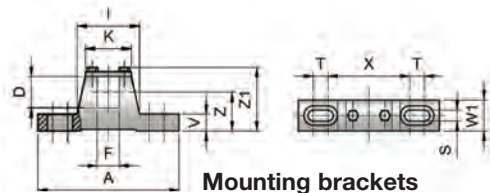

Motorized Pulleys	Material	Bracket Size	Part Number	Dimensions													Weight		
				A in	D in	F in	I in	K in	S in	T in	V in	W1 in	X in	Z in	Z1 in				
138LS	Cast iron painted	KL30	S2YAKL																
	Cast iron Ni plated		S2YAKM	7.09	1.18	0.79	3.39	2.24	0.43	0.67	0.47	0.95	4.33	1.75	2.83	1.54			
	Stainless steel		S3KL33																



Motorized Pulley 138LS, Ø 5.45 in. (138 mm)

60 Hz

Motor		No. Gear Stages	Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Min. RL in	RL Dimension inches (RL _{max} = 70.87") Weight in lbs ⁵										Type of Bracket
Power HP	No. of Poles								11.81	12.60	13.78	15.75	17.72	19.69	21.65	23.62	25.59	longer than 25.59	
0.13	12	3	138LS	10 12 14	10 14 16	397 318 263	1866	11.81	32	33	34	37	40	42	44	46	49	See Foot-note ⁴	KL30 S2YAKL
		2	138LS	24 30	24 28	178 152													
0.25	8	3	138LS	18 24 30	20 24 29	384 309 254	1090												
		2	138LS	38 48	44 51	172 147													
0.33	6	3	138LS	24 30 38	25 31 38	404 325 265	1866												
		2	138LS	48 60 76	55 65 82	182 155 124													
0.50	4	3	138LS	38 48 60	38 47 58	412 331 273	1090												
		2	138LS	76 96 120 150	85 98 123 150	185 158 126 104													
0.75	2	3	138LS	48 60 76 96 120	55 64 74 93 113	416 363 310 249 205	820												
		2	138LS	150 192 240 300	166 196 244 296	139 119 95 78													
1.0	4	3	138LS	76	88	357	1090	12.60	-	34	37	41	43	45	47	49	53		
		2	138LS	96 120 150	104 129 157	304 244 201													
	2	138LS	192 240 300	207 258 314	152 122 100														

Standard RL →

- 1 Use "nominal belt speed" to specify pulley. "Actual belt speed" is presented (for pulley lagged with 1/8" thick rubber) to assist with process design calculations. See Technical Precautions page 81. Note that "actual belt speed" decreases when lagging is not used due to decreased pulley diameter.
- 2 Belt pull value allows for gearbox loss on a lagged pulley.
- 3 Pulley must not be subjected to radial load exceeding "Maximum radial load" defined above. See "Belt Tension" section in Technical Precautions, page 82.
- 4 Additional Motorized Pulley weight, specified per Roller Length:
 25.59" ≤ RL < 39.37" Wt = 1.3 lbs/inch
 39.37" ≤ RL < 59.06" Wt = 1.5 lbs/inch
 59.06" ≤ RL < 70.87" Wt = 2.0 lbs/inch
- 5 All weights shown above are for pulleys with 1/8" thick rubber lagging. To calculate unlagged pulley weight subtract 0.1 lbs/in of Roller Length from above.

Rulmeca offers return, snub, and idler pulleys with dimensions to match our Motorized Pulleys on request.




Motorized Pulley 138LS, Ø 5.45 in. (138 mm)

Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
1	Front shaft	31	Labyrinth seal cover	110	Screw
3	Rear flange	53	Terminal box nipple	111	Screw
5	Bearing housing complete with geared rim	53.1	Cable seal nipple	113	Screw
7	Bearing housing complete	55	Spacer bushing	114	Socket set screw
8	Gearbox	56	Spacer bushing	115	Oil plug with magnet
10	Terminal box – bottom part	63	Ball bearing	126	Key
11	Terminal box cover	64	Needle bearing	127	Key
12	Shell	65-70	Ball bearing	132	Key
16	Rear shaft	71	Inner race	136	O-ring/Rubber seal
19	Input wheel	74	Locking ring	138	Rubber seal
20	Output pinion	84	Locking ring	140	Deflection seal
22	Geared rim	86	Locking ring	142	Double lip seal
23	Intermediate pinion shaft	93	Elbow or straight connector	143	O-ring
24	Intermediate wheel	102	Screw	145	Distance washer
		103	Screw	146	Washer

2-stage gearbox

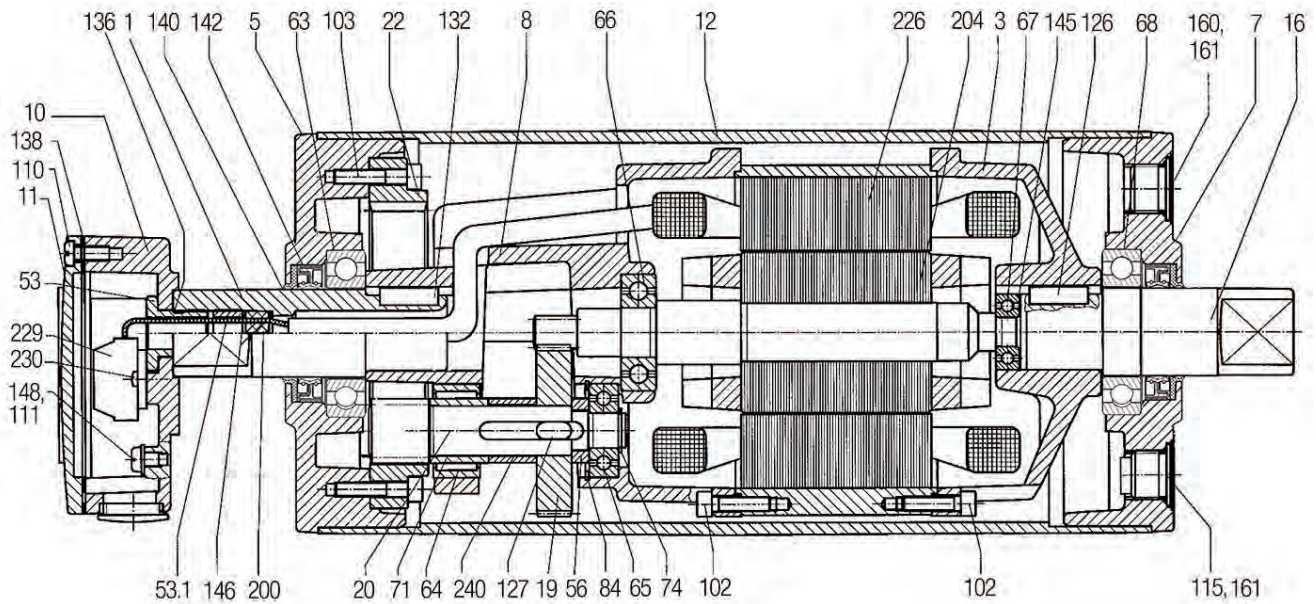




Motorized Pulley 138LS, Ø 5.45 in. (138 mm)


Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
146	Washer	161	O-ring	223	Cable
148	Washer	167	Screw	226	Stator complete
150	Electromagnetic brake	200	Rubber seal	229	Terminal block
150.1	Friction disc	204	Rotor complete with pinion	230	Screw
156	Rectifier (not shown)	208	Stainless steel cover	240	Distance ring
160	Oil plug	210	Fixing guard		


Standard oil plug




Standard straight cable connection




Elbow cable connection for stainless steel option




Stainless steel option oil plug




Standard elbow cable connection




Stainless steel option with straight cable

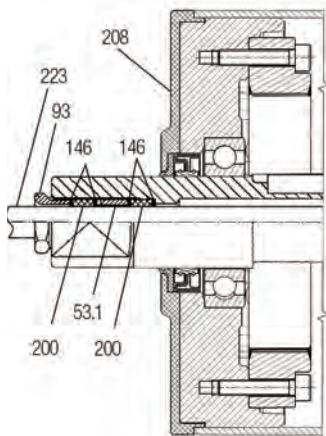

3-stage gearbox

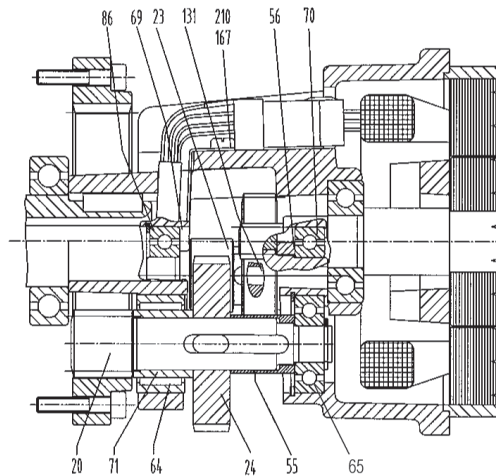

Electromagnetic brake

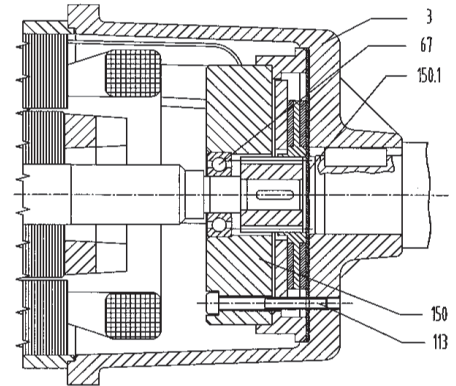



Motorized Pulley 165LS, Ø 6.49 in. (165 mm)

Motorized Pulley 165LS, with machined helical gearbox, performs with a gearbox efficiency of 95% of nominal power, in a compact diameter of 6.49 inches. With a minimum roller length (RL) of 13.78" and powers ranging from 0.15 to 3.0 HP, this Motorized Pulley is suitable for most small diameter applications. These include:

- Light agricultural conveyors
- Light C & D debris conveyors
- Mobile and portable conveyors

Motorized Pulley 165LS features a standard enclosure class of IP66/67 and is also available in stainless steel for wash down applications.

STANDARD SPECIFICATION of Motorized Pulley

- Crowned mild steel 6.49" shell treated with anti-rust wax
- Die cast aluminum bearing housing
- Mild steel shaft treated with anti-rust wax
- Die cast lightweight aluminum gearbox housing
- Sealing system – degree of protection IP66/67 (EN60034-5.) See page 37.
- Compact die cast aluminum terminal box with WAGO connectors
- Voltage: All common voltages available. Please specify.
- Three phase induction motor
- One out of two oil plugs is fitted with a magnet to filter the oil.
- Motor winding insulation class F
- Dynamically balanced rotor
- Oil change recommended every 50,000 operational hours for synthetic oil and 10,000 operational hours for standard oil.
- Maximum RL 70.87"
- Non standard RL lengths available
- Single phase is available in 0.50 and 1.50 HP, supplied with a running capacitor
- To be used in the horizontal position only.

STAINLESS STEEL options

TS8N

- Stainless steel shell – AISI 304 range
- Stainless steel shafts – AISI 303 range
- Stainless steel covered aluminum bearing housings – AISI 304 range
- Stainless steel oil plugs with magnet – AISI 304 range
- Compact stainless steel terminal box – AISI 304 range
- Alternatively, straight stainless steel connector – AISI 303 range with power cord.
- Regreasable stainless steel seals – AISI 303 range
- Degree of protection IP66/67 (EN60034-5.) See page 37.
- FDA & USDA food grade grease
- Option: FDA & USDA food grade recognized oil.
- Special mounting brackets are available.

Please note:

- **Noise-sensitive Areas:** High speed 2-pole motors can cause higher noise levels and are not recommended for noise-sensitive areas
- **Technical Precautions for Design, Installation, and Maintenance:** pages 80-90
- **Environmental Considerations:** pages 78-79
- **Optional Extras:** pg 13
- **Electrical Connection Diagrams:** pages 94-101



OPTIONAL EXTRAS

Motorized Pulley 165LS

Specification	Availability	
Total stainless steel option AISI 304 range	TS8N with regreasable labyrinth seals	x
Food grade oil & grease - FDA & USDA recognized		x
Dust explosion proof Motorized Pulleys - ATEX 95 - Zone 22 - for applications handling dusty grain etc. According to European Directive 94/9/EC.		x
Total acid resistant stainless steel option - AISI 316		x
Black rubber lagging - Standard specifications (See page 80.) 1/8" smooth lagging - Hardness 60 ±5 Shore A		o
White smooth rubber lagging (FDA). Oil, fat & grease resistant		o
Special lagging (e.g. hot vulcanized)		o
Electromagnetic brake	Min. RL increases by 1.97"	x
Mechanical backstop	Min. RL does not increase with backstop option	x
Modified for vertical mounting		o
Modified for mounting between 5° and 90° (e.g. for magnetic separators)		o
Insulation class F with standard oil: (Allowable ambient temperature: -13°F/+104°F)		Std.
Insulation class H with synthetic oil: (Allowable ambient temperature: -13°F/+120°F)		x
Special motors for applications with no belt contact		o
Low noise drives for noise sensitive areas		x
Parallel shell		x
Thermal protector		Std.
IP66/67 Compact unpainted aluminum terminal box		Std.
IP66/67 Compact stainless steel terminal box- AISI 304 or 316 range		x
Straight or elbow connector with standard power cord		x
Straight connector with screened power cord	(See page 77 for VFD precautions)	x
Straight connector with standard power cord	(Stainless steel in AISI 304 range)	x
Voltage: single voltage (460) stator (Y winding) wired for 460v/3ph/60 Hz at terminal box		Std.
single voltage (230) stator (YY winding) wired for 230v/3ph/60 Hz at terminal box		x
2 speed motors		x
Special voltage motors		x
Single phase motors		o
CSA approved motors		x

x = Optional extras


o = An option with certain limitations. Please refer to Technical precautions pages 80-90.

Std. = Fitted as standard




Motorized Pulley 165LS, Ø 6.49 in. (165 mm)

Motorized Pulley with Terminal Box

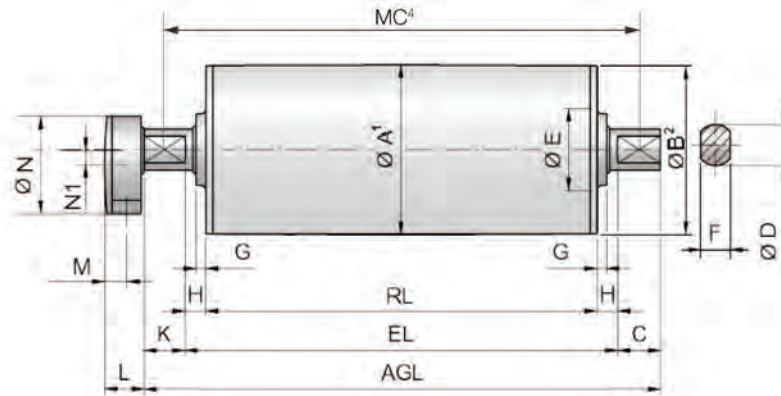


Straight connector Elbow connector TS8N version³

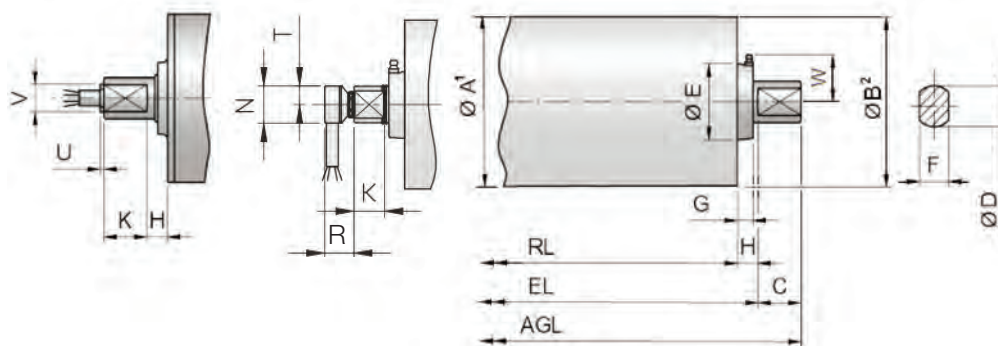

Version	Dimensions										Compact terminal box				Straight connector		Elbow connector		
	A in	B in	C in	D in	E in	F in	G in	H in	K in	W in	L in	M in	N in	N1 in	U in	V in	N in	R in	T in
Standard	6.49	6.44	1.71	1.57	3.15	1.18	0.39	0.85	1.63	-	1.61	0.95	3.74	0.55	0.16	1.06	1.18	0.98	0.59
TS8N	6.49	6.44	1.71	1.57	2.95	1.18	0.65	0.85	-	1.81	1.61	0.95	3.74	0.55	0.16	1.06	1.18	0.98	0.59

- 1 A dimension is outer diameter of crowned unlagged pulley shell at pulley centerline.
- 2 B dimension is outer diameter of crowned unlagged pulley shell at each end of shell.
- 3 Pulley shown is TS8N version with regreasable seals.
- 4 Mounting centers = $MC = RL + W1$

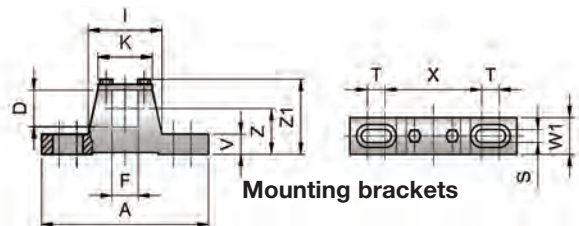

Motorized Pulleys	Material	Bracket Size	Part Number	Dimensions													Weight
				A in	D in	F in	I in	K in	S in	T in	V in	W1 in	X in	Z in	Z1 in		
165LS	Steel painted	KL41-HD	6YA0K	7.48	1.57	1.18	3.31	2.44	0.55	0.79	0.87	1.57	4.33	1.97	3.27	4.63	
	Steel Ni plated		6YA0W														
	Stainless steel		6YA0U														



Motorized Pulley 165LS, Ø 6.49 in. (165 mm)

60 Hz

Motor		No. Gear Stages	Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Min. RL in	RL Dimension inches (RL _{max} = 70.87") Weight in lbs ⁵										Type of Bracket										
Power HP	No. of Poles								15.75	17.72	19.69	21.65	23.62	25.59	27.56	29.53	31.50	longer than 31.50											
0.15	12	3	165LS	12	14	351	2473	15.75	66	69	72	76	78	80	83	87	90	See Foot-note ⁴	KL41-HD 6YA0K										
				14	16	288																							
				18	20	233																							
				24	26	177																							
0.50	6	3	165LS	24	25	624	4271			68	71	75	78	80	83	86	89			92									
				30	30	512																							
	4	3	165LS	38	37	414	2473			64	67	70	73	76	78	81	84			88									
				48	48	328																							
				60	59	265																							
				76	77	202																							
				96	98	160																							
				120	123	126																							
				150	152	102																							
				192	199	78																							
				240	251	62	1708																						
1.00	4	3	165LS	38	38	810	2473		70	74	77	80	82	84	88	91	94												
				48	48	664																							
				60	59	537																							
		2	165LS	76	77	409																							
				96	98	325																							
				120	123	256																							
				150	152	207																							
				192	199	158																							
				240	251	125	1708																						
1.50	4	3	165LS	60	66	730	2473		75	78	81	84	87	89	92	95	99												
				76	81	569																							
	2	3	165LS	96	99	467																							
				120	123	378																							
				150	161	288																							
				192	203	228																							
				240	257	180	1708																						
				300	318	145																							
				384	416	111																							
				480	525	88																							
				600	646	74																							
2.00	2	3	165LS	120	123	515	2473		77	80	83	87	89	91	94	98	101												
				150	161	393																							
				192	203	311																							
		2	165LS	240	257	246	1708																						
				300	318	198																							
				384	416	151																							
				480	525	120																							
				600	651	105	1596																						
				768	787	88																							
3.00	2	3	165LS	120	132	717	2473	17.72	-	84	87	91	93	95	98	102	105												
				150	161	588																							
				192	192	466																							
		2	165LS	240	250	378	1708																						
				300	302	314																							
				384	417	227																							
				480	527	180	1955																						
				600	648	146																							
				768	783	121	1596																						

Standard RL →

- Use "nominal belt speed" to specify pulley. "Actual belt speed" is presented (for pulley lagged with 1/8" thick rubber) to assist with process design calculations. See Technical Precautions page 81. Note that "actual belt speed" decreases when lagging is not used due to decreased pulley diameter.
- Belt pull value allows for gearbox loss on a lagged pulley.
- Pulley must not be subjected to radial load exceeding "Maximum radial load" defined above. See "Belt Tension" section in Technical Precautions, page 82.
- Additional Motorized Pulley weight, specified per inch of Roller Length:
 - 31.50" ≤ RL < 45.28" Wt = 1.5 lbs/in
 - 45.28" ≤ RL < 64.96" Wt = 2.1 lbs/in
 - 64.96" ≤ RL < 70.87" Wt = 2.9 lbs/in
- All weights shown above are for pulleys with 1/8" thick rubber lagging. To calculate unlagged pulley weight subtract 0.1 lbs/in of Roller Length from above.

Rulmeca offers return, snub, and idler pulleys with dimensions to match our Motorized Pulleys on request.




Motorized Pulley 165LS, Ø 6.49 in. (165 mm)

Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
1	Front shaft	53	Terminal box nipple	103	Screw
3	Rear flange	53.1	Cable seal nipple	110	Screw
5	Bearing housing complete with geared rim	55	Spacer bushing	111	Screw
7	Bearing housing complete	56	Spacer bushing	112	Socket set screw
8	Gearbox	63	Ball bearing	113	Screw
10	Terminal box – bottom part	64	Needle bearing	115	Oil plug with magnet
11	Terminal box cover	65-70	Ball bearing	126	Key
12	Shell	71	Inner race	127	Key
16	Rear shaft	73	Locking ring	131	Key
19	Input wheel	74	Locking ring	132	Key
20	Output pinion	81	Locking ring	136	O-ring/Rubber seal
22	Geared rim	84	Locking ring	138	Rubber seal
23	Intermediate pinion shaft	85	Locking ring		
24	Intermediate wheel	86	Locking ring		
31	Labyrinth seal cover	93	Elbow or straight connector		
		102	Screw		

2-stage gearbox

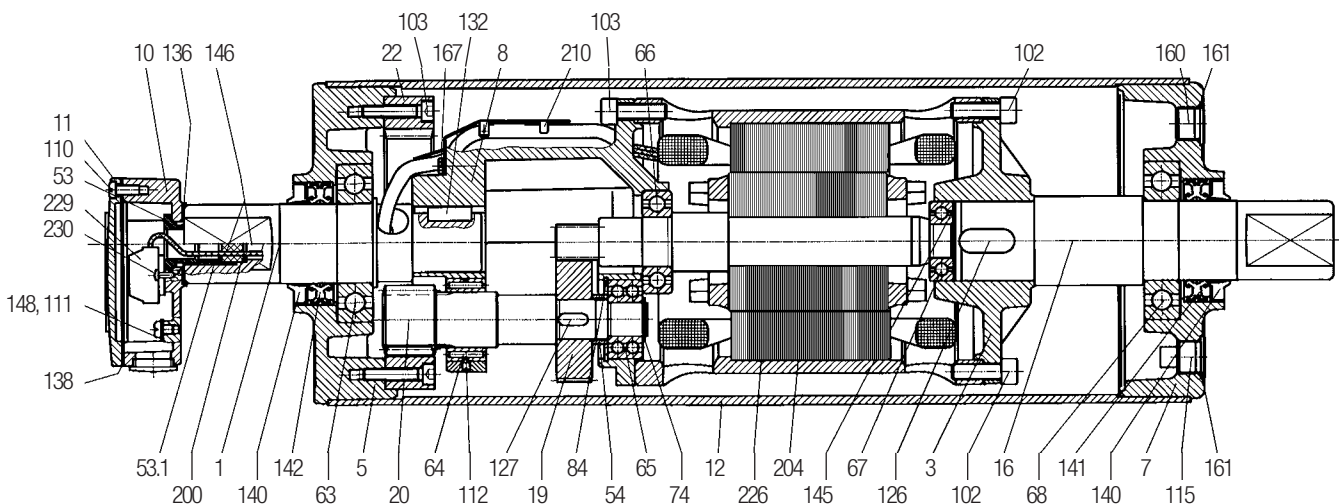



Motorized Pulley 165LS, Ø 6.49 in. (165 mm)


Spare parts list and sectional drawings

Pos.	Description
140	Deflection seal
141	Double lip seal
142	Double lip seal
145	Distance washer
146	Washer
148	Washer
150	Electromagnetic brake
150.1	Friction disc
156	Rectifier (not shown)
160	Oil plug
161	O-ring
167	Screw
200	Rubber seal
204	Rotor complete with pinion
206	Insulated sleeve for wire protection


Pos.	Description
208	Stainless steel cover – gear end
209	Stainless steel cover – oil plug end
210	Fixing guard
223	Cable

Pos.	Description
226	Stator complete
229	Terminal block
230	Screw
240	Distance ring


Standard straight cable connection




Standard elbow cable connection




Stainless steel option oil plug




Stainless steel option with straight cable connection




Stainless steel option with elbow cable connection




Stainless steel end housing

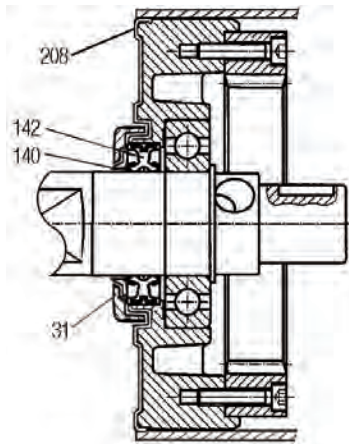

3-stage gearbox

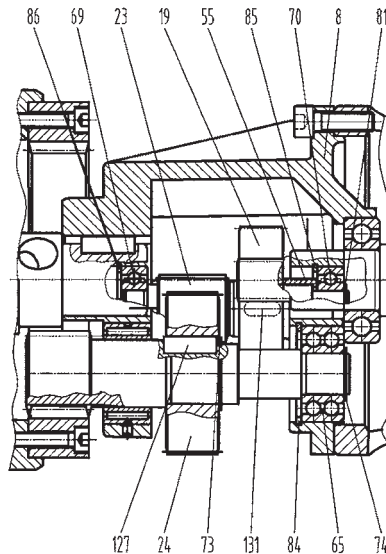

Electromagnetic brake

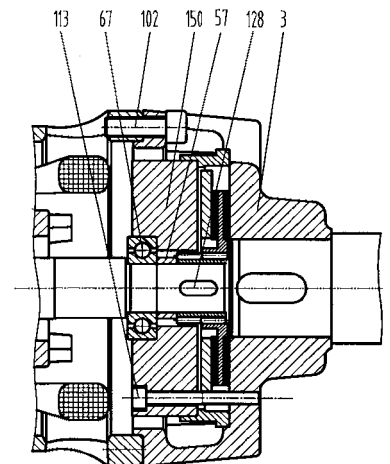



Motorized Pulley 220M & 220H, Ø 8.50 in. (216 mm)

Our 8.50" diameter Motorized Pulley range offers two different performance levels for BULK applications:

- M for Medium duty
- H for Heavy duty

It is important to note the product differences and choose the appropriate pulley based on estimated belt tension (radial load.) See page 82. The actual radial load must be less than the maximum allowable radial load shown in this catalog.

Be aware of increased belt tensions required to drive multi-ply thick heavy belts and/or larger belt widths.

If the 8.50" diameter model is not strong enough to resist estimated belt tension, then select 12.64" diameter model.

M for Medium duty

The internal parts of 220M are designed to match irregular working conditions in applications such as mobile crushing & screening, cement & concrete plants, mobile conveyors and open stone & gravel pits.

H for Heavy duty

A reinforced 3-stage-gearbox provides 220H with the necessary strength needed for low speeds and high torque. 220H is popular in recycling (hand sorter conveyors), bunker discharge conveyors and where a combination of slow speed and high torque is required.

STANDARD SPECIFICATION of Motorized Pulley

- Crowned mild steel 8.50" diameter steel shell treated with anti-rust wax
- Powder coated cast iron bearing housings
- Mild steel shafts treated with anti-rust wax
- Shaft sealing system - degree of protection IP66/67 (EN60034-5.) See page 37.
- Powder coated die cast aluminum terminal box
- 3-phase induction motors with thermal protector
- Voltage: All common voltages available. Please specify.
- Motor winding insulation Class F
- Dynamically balanced rotor
- Two oil plugs fitted with magnets to filter the oil
- Oil change recommended every 50,000 operational hours for synthetic oil and 10,000 operational hours for standard oil.
- Minimum RL. Please refer to pages 21-22
- Maximum RL – Please inquire
- Non standard RL's available
- To be used in horizontal positions ± 5 degree only

Please note:

- **Noise-sensitive Areas:** High speed 2-pole motors can cause higher noise levels and are not recommended for noise-sensitive areas
- **Technical Precautions for Design, Installation, and Maintenance:** pages 80-90
- **Environmental Considerations:** pages 78-79
- **Optional Extras:** pg 19
- **Electrical Connection Diagrams:** pages 94-101

STAINLESS STEEL options

TS9N

- Stainless steel shell – AISI 304 range
- Stainless steel shafts – AISI 303/4 range
- Stainless steel covered bearing housings – AISI 316 range
- Stainless steel oil plugs – AISI 304 range – one out of two with magnet
- Stainless steel exterior bolts – AISI 304 range
- Regreasable labyrinth seals with grease nipples in stainless steel – AISI 304 range
- Shaft sealing system – degree of protection IP66/67 (EN60034-5).

TS10N

- As TS9N, but without regreasable labyrinth seals.

SEMI-RUST-FREE options

TS11N

- As TS9N, but with crowned mild steel shell treated with anti-rust wax.

TS12N

- As TS10N, but with crowned mild steel shell treated with anti-rust wax.

Other Stainless Options:

- FDA & USDA food grade recognized oil and grease are not included in TS9N to TS12N, but available on request
- Complete Motorized Pulleys in acid resistant stainless steel – AISI 316 range – available on request.
- Special mounting brackets are available

Electrical connection options:

- Salt water resistant powder coated aluminum terminal box with zinc plated exterior bolts
- Stainless steel terminal box – AISI 304 range (max. 5.5 HP)
- Straight stainless steel connector with flying lead – AISI 304 range.

Please specify required TS-number when ordering Stainless Steel options.



OPTIONAL EXTRAS

Motorized Pulley 220M & 220H

Specification	Availability
Total stainless steel option AISI 304 range TS9N with regreasable labyrinth seals	x
Total stainless steel option AISI 304 range TS10N with standard seals	x
Semi-rust free option TS11N with regreasable labyrinth seals	x
Semi-rust free option TS12N with standard seals	x
Regreasable labyrinth seals	x
Food grade oil & grease - FDA & USDA recognized	x
Dust explosion proof Motorized Pulleys - ATEX 95 - Zone 22 - for applications handling of dusty grain etc. According to European Directive 94/9/EC.	x
Total acid resistant stainless steel option - AISI 316	x
Black rubber lagging - Standard specifications (See page 80.)	
1/4" smooth lagging - Hardness 60 ±5 Shore A	o
1/4" diamond lagging - Hardness 60 ±5 Shore A	o
White smooth rubber lagging (FDA). Oil, fat & grease resistant	o
Special lagging (e.g. hot vulcanized)	o
Electromagnetic brake Min. RL increases by 3.94"	x
Mechanical backstop Min. RL does not increase with backstop option	x
Modified for vertical mounting	o
Modified for mounting between 5° and 90° (e.g. for magnetic separators)	o
Insulation class F with standard oil: (Allowable ambient temperature -13°F/+104°F)	Std.
Insulation class H with synthetic oil: (Allowable ambient temperature -13°F/+120°F)	x
Special motors for applications with no belt contact	o
Low noise drives for noise sensitive areas	x
Parallel shell (i.e. no crown)	x
Thermal protector	Std.
IP66/67 Yellow powder coated aluminum terminal box	Std.
IP66/67 Compact powder coated aluminum terminal box (food grade approved) < 5.5 HP only	o
IP66/67 Compact stainless steel terminal box - AISI 304 or 316 range < 5.5 HP only	o
Straight or elbow connector with standard power cord < 5.5 HP only	x
Straight connector with screened power cord (See page 77 for VFD precautions.) < 5.5 HP only	x
Straight connector with power cord (Stainless steel in AISI 304 range) < 5.5 HP only	x
Voltage: < 5.5 HP dual voltage (230/460) stator (YY/Y winding) wired for 460v/3ph/60 Hz at terminal box	Std.
< 5.5 HP dual voltage (230/460) stator (YY/Y winding) wired for 230v/3ph/60 Hz at terminal box	x
7.5 HP single voltage (460) stator (Y winding) wired for 460v/3ph/60 Hz at terminal box	Std.
7.5 HP single voltage (230) stator (YY winding) wired for 230v/3ph/60 Hz at terminal box	x
2 speed motors	x
Special voltage motors	x
Single phase motors	o
CSA approved motors	x


x = Optional extras

o = An option with certain limitations. Please refer to Technical precautions pages 80-90.

Std. = Fitted as standard




Motorized Pulley 220M & 220H, Ø 8.50 in. (216 mm)

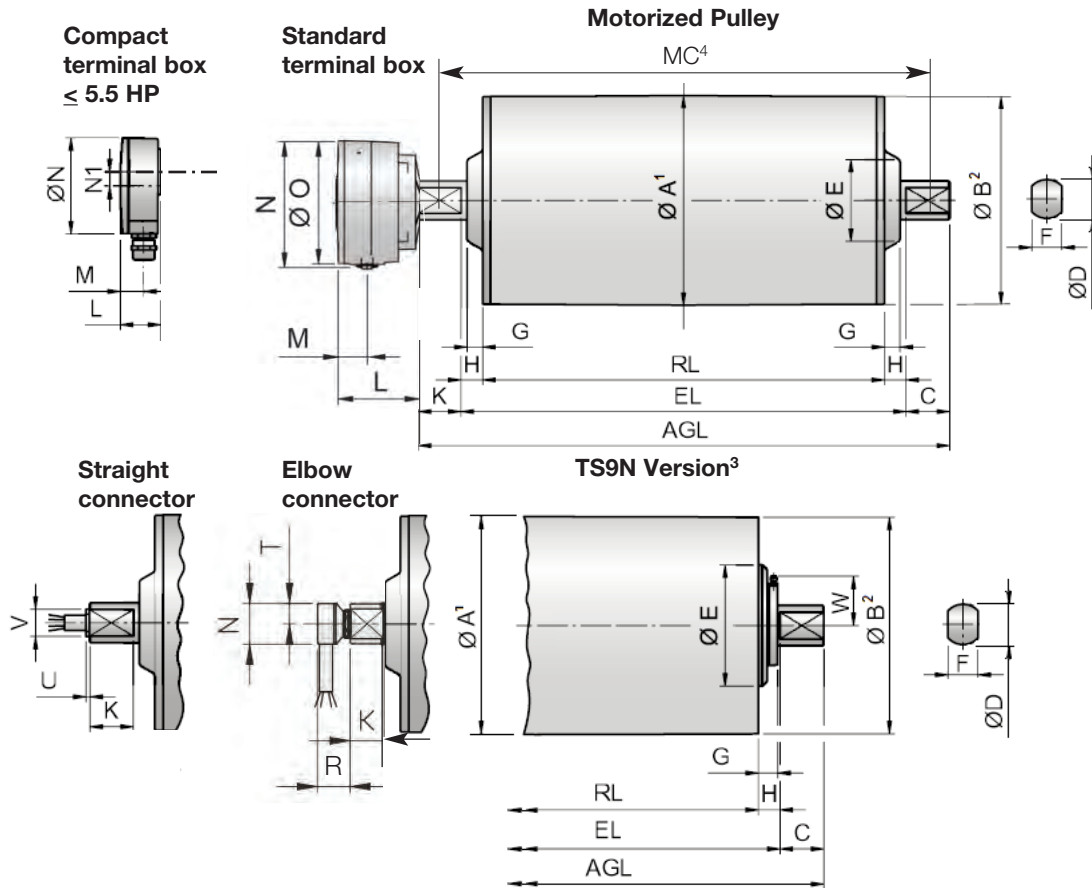

Version	Dimensions										Standard terminal box					Compact terminal box ⁵					Straight connector ⁵			Elbow connector ⁵			
	A	B	C	D	E	F	G	H	W	K	L	M	N	O	K	L	M	N	N1	K	U	V	K	N	R	T	
Standard	8.50	8.44	1.71	1.57	3.94	1.18	0.61	0.85	-	1.63	3.43	1.06	5.08	5.04	1.63	1.61	0.95	3.74	0.55	1.71	0.16	1.06	1.71	1.18	0.98	0.59	
TS9N	8.50	8.44	1.71	1.57	3.94	1.18	0.77	0.85	2.05	1.63	3.43	1.06	5.08	5.04	1.63	1.61	0.95	3.74	0.55	1.71	0.16	1.06	1.71	1.18	0.98	0.59	

- 1 A dimension is outer diameter of crowned unlagged pulley shell at pulley centerline.
- 2 B dimension is outer diameter of crowned unlagged pulley shell at each end of shell.
- 3 Pulley shown is TS9N version with regreasable seals.
- 4 Mounting centers = MC = RL + W1.
- 5 These connection options are only available in Motorized Pulleys at 5.5 HP and less.

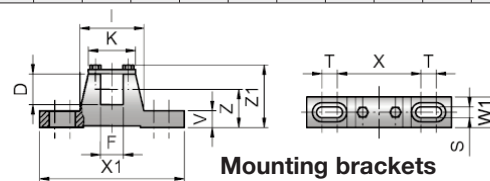

Motorized Pulleys	Material	Bracket Size	Part Number	Dimensions													Weight
				D in	F in	I in	K in	S in	T in	V in	W1 in	X in	X1 in	Z in	Z1 in		
220M & 220H	Steel painted	KL41-HD	6YA0K	1.57	1.18	3.31	2.44	0.55	0.79	0.87	1.57	4.33	7.48	1.97	3.27	4.63	
	Steel Ni plated		6YA0W														
	Stainless steel		6YA0U														



Motorized Pulley 220M & 220H, Ø 8.50 in. (216 mm) 60 Hz

Motor		No. Gear Stages	Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Min. RL in	RL Dimension inches (RL>78.74" available on request)										Type of Bracket			
Power HP	No. of Poles								Weight in lbs ⁵													
										15.75	17.72	19.69	21.65	23.62	25.59	27.56	29.53	31.50	longer than 31.50			
0.50	8	3	220H	30 38	34 40	458 383	5620	17.72	-	146*	154	160	168	175	182	189	196					
		2	220M	48 60 76 96 120 150 192 240 300	54 69 84 101 128 159 208 250 319	287 227 185 155 122 97 75 62 49	2585	15.75	111*	117	125	132	139	146	154	160	168					
0.75	8	3	220H	30 38	34 40	685 577	5620	19.69	-	-	163	169	177	183	191	198	205					
		2	220M	48 60 76 96 120 150 192 240 300	54 69 84 101 128 159 208 250 319	430 337 277 231 181 146 112 93 73	2585	17.72	-	126	134	140	148	155	162	169	177					
1	8	3	220H	24 30 38	28 34 40	1137 928 774	5620	19.69	-	-	163*	169	177	183	191	198	205			See Foot-note ⁴	KL41-HD 6YA0K	
		2	220M	48 60 76 96 120 150 192 240 300	54 69 84 101 128 159 208 250 319	583 460 376 314 247 198 152 126 99	2585	17.72	-	126*	134	140	148	155	162	169	177					
1.5	6	3	220H	30 38 48	37 46 54	1251 1021 852	5620	19.69	-	-	156	163	170	177	184	191	199					
		2	220M	60 76	72 91	641 506	2585	17.72	-	122*	129	136	144	150	158	165	172					
	4	2	220M	96 120 150 192 240 300 384 480 600	108 137 168 201 256 319 415 501 637	427 337 276 230 180 145 111 93 73	2585	15.75	106*	113	121	127	135	141	149	156	163					

← Special RL | Standard RL →

- 1 Use "nominal belt speed" to specify pulley. "Actual belt speed" is presented (for pulley lagged with 1/4" thick rubber) to assist with process design calculations. See Technical Precautions page 81. Note that "actual belt speed" decreases when lagging is not used due to decreased pulley diameter.
 - 2 Belt pull value allows for gearbox loss on a lagged pulley.
 - 3 Pulley must not be subjected to radial load exceeding "Maximum radial load" defined above. See "Belt Tension" section in Technical Precautions, page 82.
 - 4 Additional Motorized Pulley weight, specified per Roller Length:
 $31.50" \leq RL < 59.06"$ Wt = 3.7 lbs/in
 $59.06" \leq RL < 78.74"$ Wt = 7.1 lbs/in
 - 5 All weights shown above are for pulleys with 1/4" thick lagging. To calculate unlagged pulley weight subtract 0.3 lbs/in of Roller Length from above.
- * Special "Short Roller Length" Option

Rulmeca offers return, snub, and idler pulleys with dimensions to match our Motorized Pulleys on request.



Motorized Pulley 220M & 220H, Ø 8.50 in. (216 mm) 60 Hz

Motor		No. Gear Stages	Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Min. RL in	RL Dimension inches (RL>78.74" available on request) Weight in lbs ⁵										Type of Bracket
Power HP	No. of Poles								15.75	17.72	19.69	21.65	23.62	25.59	27.56	29.53	31.50	longer than 31.50	
	6	3	220H	48 60	55 68	1137 928	5620	19.69	-	-	156	163	170	177	184	191	199	See Foot-note ⁴ KL41-HD 6YAOK	
		2	220M	76	91	690	2585	17.72	-	126*	134	140	148	155	162	169	177		
2	4	2	220M	96	108	583	2585	15.75	110*	117	125	132	139	146	154	160	164		
				120	137	460													
				150	168	376													
				192	201	314													
				240	256	247													
				300	319	198													
				384	415	152													
480	501	126																	
600	637	99																	
	4	3	220H	60 76	68 82	1361 1136	5620	19.69	-	-	156*	165	172	179	187	193	201		
		2	220M	96 120 150 192 240 300 384 480 600	108 137 168 201 256 319 415 501 637	855 675 551 460 361 291 223 185 145	2585	17.72	-	126*	134	140	148	155	162	169	177		
3	4	2	220M	96	108	583	2585	15.75	110*	117	125	132	139	146	154	160	164		
				120	137	460													
4	4	3	220H	96 120	104 129	1216 978	5620	21.65	-	-	-	169	177	183	191	198	201		
		2	220M	150 192 240 300 384 480 600	168 201 256 319 415 501 637	751 627 492 396 304 252 197	2585	19.69	-	-	138	145	153	159	167	173	181		
5.5	2	3	220H	120 150	136 163	1237 1033	5620	21.65	-	-	-	169	177	183	191	198	205		
		2	220M	192 240 300 384 480 600	216 274 336 402 512 636	777 614 501 418 329 264	2585	19.69	-	-	138	145	153	159	167	173	181		
7.5	2	3	220H	192 240 300 384 480 600	202 254 314 408 522 625	1146 909 735 567 443 370	5620	21.65	-	-	-	169	177	183	191	198	205		

← Special RL | Standard RL →

- Use "nominal belt speed" to specify pulley. "Actual belt speed" is presented (for pulley lagged with 1/4" thick rubber) to assist with process design calculations. See Technical Precautions page 81. Note that "actual belt speed" decreases when lagging is not used due to decreased pulley diameter.
 - Belt pull value allows for gearbox loss on a lagged pulley.
 - Pulley must not be subjected to radial load exceeding "Maximum radial load" defined above. See "Belt Tension" section in Technical Precautions, page 82.
 - Additional Motorized Pulley weight, specified per Roller Length:
 $31.50" \leq RL < 59.06" \text{ Wt} = 3.7 \text{ lbs/in}$
 $59.06" \leq RL < 78.74" \text{ Wt} = 7.1 \text{ lbs/in}$
 - All weights shown above are for pulleys with 1/4" thick lagging. To calculate unlagged pulley weight subtract 0.3 lbs/in of Roller Length from above.
- * Special "Short Roller Length" Option

Rulmeca offers return, snub, and idler pulleys with dimensions to match our Motorized Pulleys on request.





Motorized Pulley 220M, Ø 8.50 in. (216 mm)

Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
1	Shell	14.1	Rear shaft (ss option)	53	Distance washer
1.1	Shell (ss option)	14.2	Rear shaft (short RL option)	53.1	Compression nipple
2	End housing with geared rim	15	Stator complete	59	Countersunk head screw
2.1	End hsg w/geared rim (ss option)	15.1	Rotor	66	Waved spring washer
3	End housing	16	Terminal box complete	68	Key
3.1	End housing (ss option)	17	Nipple	70	Toothed washer
8	Geared rim	20	Cover	78	Gasket
9	Rotor pinion	20.1	Cover with labyrinth groove	79	Holding clip or plastic tie
10	Input wheel	23	Rear flange	85.1	Intermediate flange for brake
11	Output pinion	23.1	rear flange for backstop	91	Electromagnetic brake
12	Gear box	23.2	Rear flange for Brake	93	Retaining ring
13	Front shaft	24.1	Shaft oil seal outer	95	Straight connector
13.1	Front shaft (ss option)	24.2	Shaft oil seal inner	96	Elbow connector
14	Rear shaft	24.3	Shaft oil seal (lab option)	101	Key
		25	O-ring	104	Distance washer
		26	Bearing	120	Labyrinth cover
		27	Bearing	121	Set screw
		28	Bearing	122	O-ring
		29	Bearing	123	Grease nipple
		29.1	Bearing (Backstop option)	124	Distance washer
		30	Bearing	140	Deflection seal
		31	Bearing	143	O-ring
		39	Hexagon socket screw	146	Special compression washer
		40	Hexagon socket screw	200	Rubber seal
		41	Hexagon socket screw	201	O-ring
		52	Magnetic oil plug	223	Cable

Compact Terminal Box

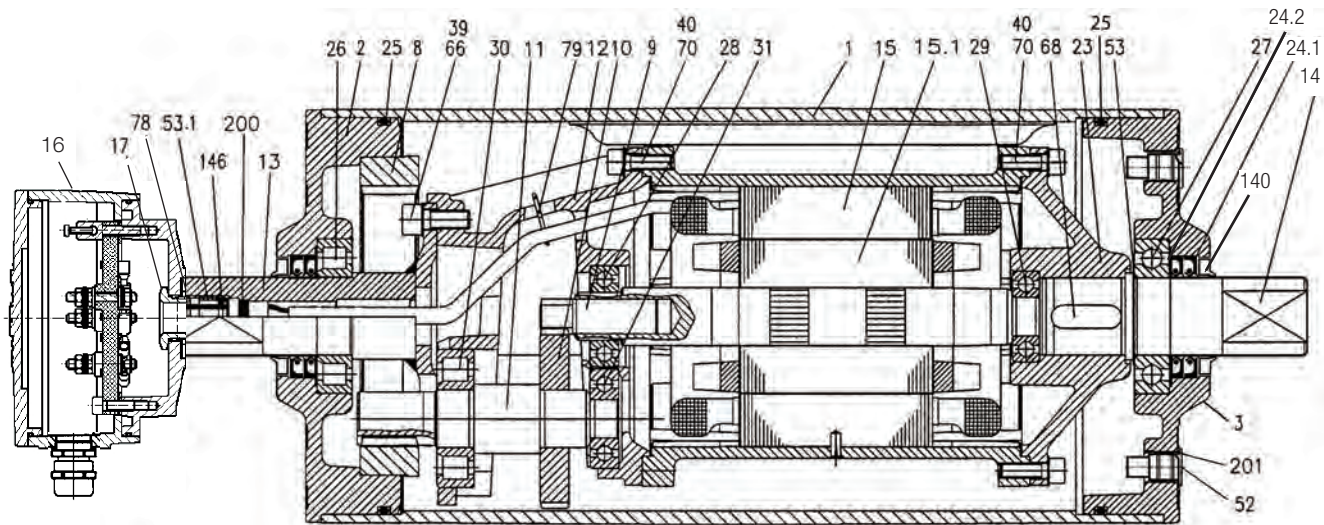
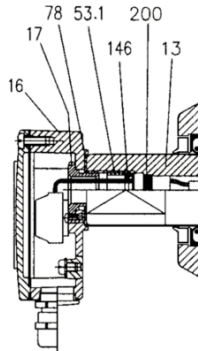




Motorized Pulley 220H, Ø 8.50 in. (216 mm)

Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
1	Shell	17	Nipple	93	Retaining ring
1.1	Shell (ss option)	20	Cover	95	Straight connector
2	End housing with geared rim	20.1	Cover with labyrinth groove	96	Elbow connector
2.1	End hsg w/geared rim (ss option)	23	Rear flange	101	Key
3	End housing	23.1	Rear flange (backstop option)	104	Distance washer
3.1	End housing (ss option)	23.2	Rear flange (int. brake option)	120	Labyrinth cover
8	Geared rim	24.1	Shaft oil seal outer	121	Set screw
9	Rotor pinion	24.2	Shaft oil seal inner	122	O-ring
10	Input wheel	24.3	Shaft oil seal (lab option)	123	Grease nipple
11	Output pinion	25	O-ring	124	Distance washer
12	Gear box	26	Bearing	140	Deflection seal
13	Front shaft	27	Bearing	143	O-ring
13.1	Front shaft (ss option)	28	Bearing	146	Special compression washer
14	Rear shaft	29	Bearing	180	Intermediate pinion
14.1	Rear shaft (ss option)	29.1	Bearing (Backstop option)	181	Intermediate wheel
14.2	Rear shaft (short RL option)	30	Bearing	182	Distance washer
15	Stator complete	31	Bearing	184	Roller bearing
15.1	Rotor	40	Hexagon socket screw	185	Roller bearing
16	Terminal box complete	41	Hexagon socket screw	186	Key
		52	Magnetic oil plug	187	Key
		53	Distance washer	188	Spring washer
		53.1	Compression nipple	190	Spring washer
		59	Countersunk head screw	191	Spring washer
		66	Waved spring washer	194	Set screw
		68	Key	196	Key
		70	Toothed washer	197	Spring washer
		78	Gasket	198	Distance washer
		79	Holding clip or plastic tie	200	Rubber seal
		85.1	Intermediate flange for brake	201	O-ring
		91	Electromagnetic brake	223	Cable

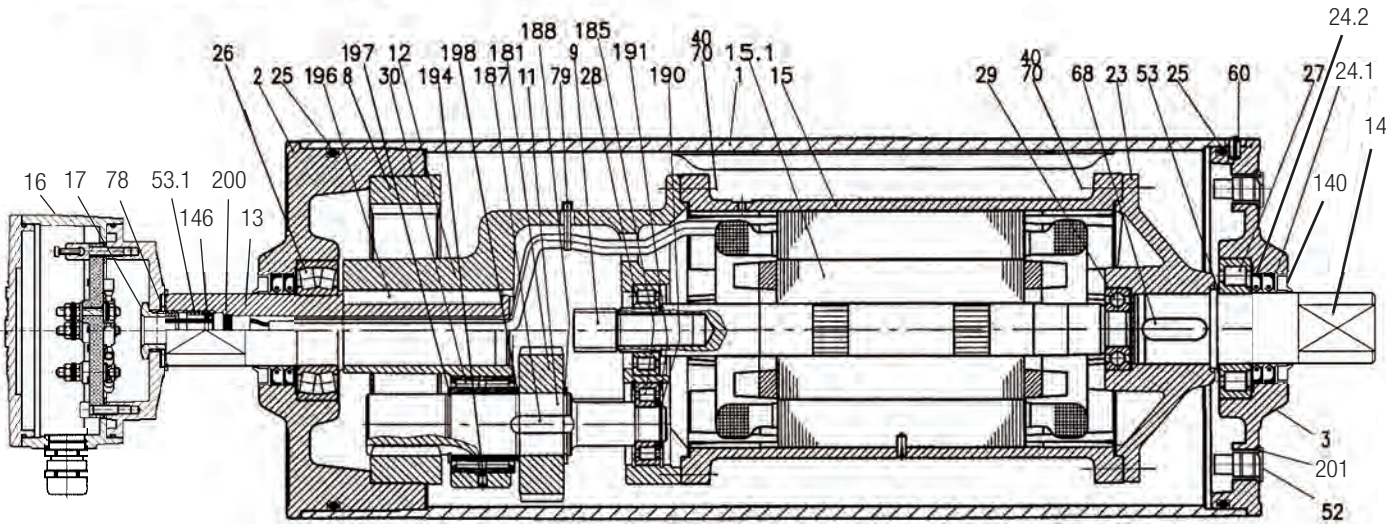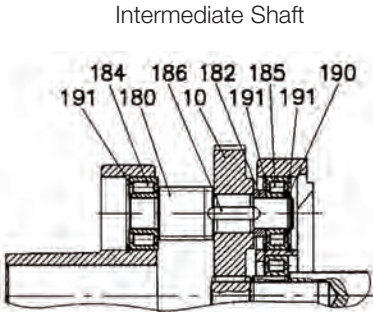





Motorized Pulley 220M & 220H, Ø 8.50 in. (216 mm)

Sectional drawings (See parts list on pages 23 & 24.)


Standard straight cable connection




Stainless steel option with straight cable connection




Standard elbow cable connection




Stainless steel option with elbow cable connection




Electromagnetic Brake Option

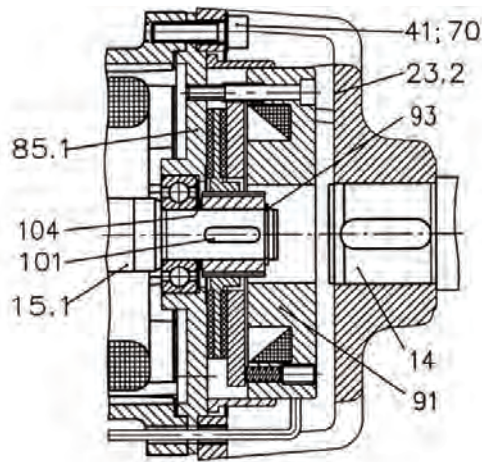


Mechanical Backstop Option

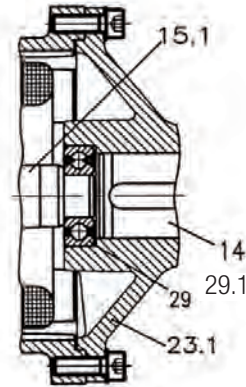

Short Roller Length Option

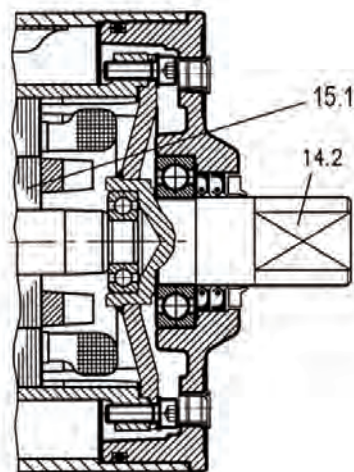

Carbon Steel Shell & Shaft with Labyrinth Option

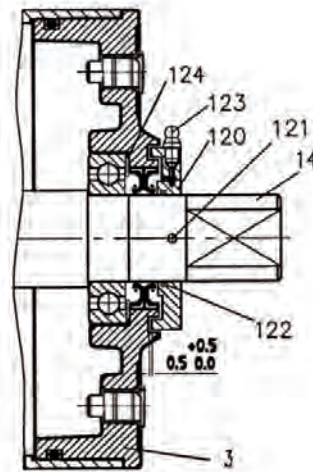





Motorized Pulley 220M & 220H, Ø 8.50 in. (216 mm)

Sectional drawings (See parts list on pages 23 & 24.)

Stainless Steel with Labyrinth Options TS9N
(Position 1 for carbon steel shell valid for TS11N only.)

Stainless Steel Non-Labyrinth Options TS10N
(Position 1 for carbon steel shell valid for TS12N only.)

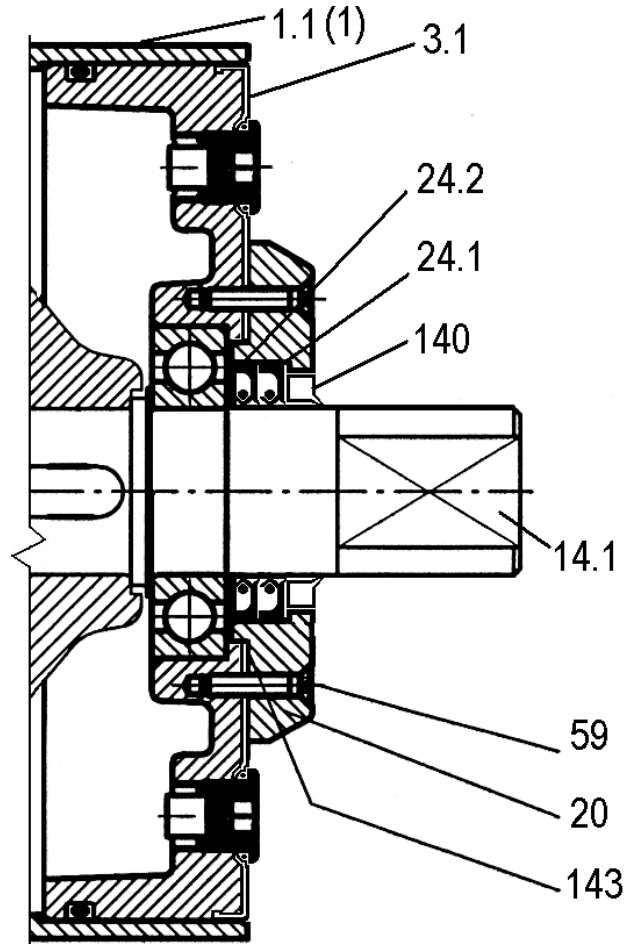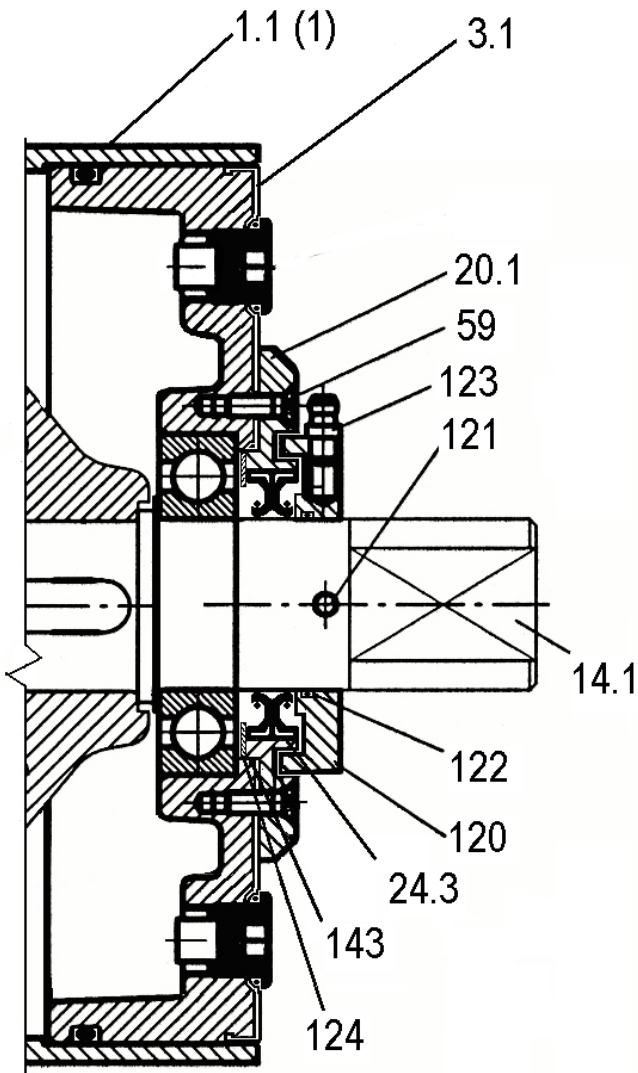



ORDERING* INFORMATION

Motorized Pulleys

Contact Person _____ Date _____ Ref # _____

Company _____

Address _____

Phone _____ Fax _____ Email _____

Diameter (in)		Roller Length (in)		Belt Speed (fpm)		Lagging Material		Type of Oil	
<input type="checkbox"/>	5.45	<input type="checkbox"/>	11.81	<input type="checkbox"/>	10	<input type="checkbox"/>	black rubber, diamond pattern	<input type="checkbox"/>	standard
<input type="checkbox"/>	6.49	<input type="checkbox"/>	12.60	<input type="checkbox"/>	12	<input type="checkbox"/>	black rubber, smooth pattern	<input type="checkbox"/>	synthetic
<input type="checkbox"/>	8.50	<input type="checkbox"/>	13.78	<input type="checkbox"/>	14	<input type="checkbox"/>	white rubber, smooth pattern	<input type="checkbox"/>	food grade
<input type="checkbox"/>	12.64	<input type="checkbox"/>	15.75	<input type="checkbox"/>	18	<input type="checkbox"/>	solid ceramic bonded to pulley shell	Motor Insulation	
<input type="checkbox"/>	15.91	<input type="checkbox"/>	17.72	<input type="checkbox"/>	24	<input type="checkbox"/>	ceramic plates vulc. into rubber		
<input type="checkbox"/>	19.72	<input type="checkbox"/>	19.69	<input type="checkbox"/>	30	Lagging Bond		<input type="checkbox"/> class F (standard) <input type="checkbox"/> class H	
<input type="checkbox"/>	24.80	<input type="checkbox"/>	21.65	<input type="checkbox"/>	38				
<input type="checkbox"/>	31.50	<input type="checkbox"/>	23.62	<input type="checkbox"/>	48	<input type="checkbox"/>	cold bonded	Type of Crown	
<input type="checkbox"/>	40.16	<input type="checkbox"/>	25.59	<input type="checkbox"/>	60	<input type="checkbox"/>	hot vulcanized		
Power (HP)		<input type="checkbox"/>	27.56	<input type="checkbox"/>	76	Lagging Thickness		<input type="checkbox"/> center crown <input type="checkbox"/> trapezoidal crown <input type="checkbox"/> no crown	
		<input type="checkbox"/>	29.53	<input type="checkbox"/>	96				
<input type="checkbox"/>	33.46	<input type="checkbox"/>	120	Termination (select one)		<input type="checkbox"/> standard box, standard paint <input type="checkbox"/> standard box, food grade paint <input type="checkbox"/> standard box, unpainted <input type="checkbox"/> compact box, unpainted <input type="checkbox"/> compact box, stainless steel <input type="checkbox"/> power cord, elbow connector <input type="checkbox"/> power cord, stan. straight connector <input type="checkbox"/> power cord, SS straight connector		Mounting Brackets	
<input type="checkbox"/>	35.43	<input type="checkbox"/>	150						
<input type="checkbox"/>	37.40	<input type="checkbox"/>	192	Voltage		Power Cord (if applicable)		<input type="checkbox"/> standard <input type="checkbox"/> regreasable	
<input type="checkbox"/>	39.37	<input type="checkbox"/>	240						
<input type="checkbox"/>	41.34	<input type="checkbox"/>	240	<input type="checkbox"/>	208v	<input type="checkbox"/> 4 ft, standard insulation <input type="checkbox"/> 4 ft, screened <input type="checkbox"/> 10 ft, standard insulation <input type="checkbox"/> 10 ft, screened		Material & Surface Finish	
<input type="checkbox"/>	43.31	<input type="checkbox"/>	300	<input type="checkbox"/>	230v				
<input type="checkbox"/>	45.28	<input type="checkbox"/>	384	<input type="checkbox"/>	380v	<input type="checkbox"/> mild steel, standard paint <input type="checkbox"/> total stainless steel <input type="checkbox"/> semi-rust free		Other Special Options	
<input type="checkbox"/>	47.24	<input type="checkbox"/>	480	<input type="checkbox"/>	460v				
<input type="checkbox"/>	49.21	<input type="checkbox"/>	600	<input type="checkbox"/>	575v	<input type="checkbox"/> vertical shaft (see page 91) <input type="checkbox"/> inclined shaft (see page 91) <input type="checkbox"/> CSA approved motor <input type="checkbox"/> dust explosion proof (per ATEX 95, Zone 22)			
<input type="checkbox"/>	51.18	<input type="checkbox"/>	768	Phase & Frequency					
<input type="checkbox"/>	53.15	<input type="checkbox"/>	960			<input type="checkbox"/>	3ph/60Hz		
<input type="checkbox"/>	55.12	<input type="checkbox"/>	1064	<input type="checkbox"/>	3ph/50Hz				
<input type="checkbox"/>	57.09	<input type="checkbox"/>	1320	<input type="checkbox"/>	1ph/60Hz				
<input type="checkbox"/>	59.06	<input type="checkbox"/>		<input type="checkbox"/>	1ph/50Hz				
<input type="checkbox"/>	61.02	<input type="checkbox"/>		Quantity _____ Motorized Pulley(s)		Special Comments: _____ _____ _____			
<input type="checkbox"/>	62.99	<input type="checkbox"/>							

* Note that this form displays all powers, speeds, and options available from Rulmeca. Some combinations are unavailable (e.g. 100 HP is not available in 12.64" diameter.)



Motorized Pulley 320M & 320H, Ø 12.64 in. (321 mm)

Our 12.64" diameter Motorized Pulley range offers different performance levels for BULK applications:

- M for Medium duty
- H for Heavy duty

It is important to note the product differences and choose the appropriate pulley based on estimated belt tension (radial load.) See page 82. The actual radial load must be less than the maximum allowable radial load shown in this catalog.

Be aware of increased belt tensions required to drive multi-ply thick heavy belts and/or larger belt widths.

If the 12.64" diameter model is not strong enough to resist estimated belt tension, then select 15.91" diameter model.

M for Medium duty

The internal parts of 320M are designed for tough and irregular operating conditions (e.g. crushing & screening applications, asphalt, cement, and concrete plants.)

H for Heavy duty

A solid 3-stage gearbox, larger shafts, and stronger bearings enable the 320H to provide low speed at high torque and handle irregular loadings in harsh operating conditions.

STANDARD SPECIFICATION of Motorized Pulley

- Crowned mild steel 12.64" diameter steel shell treated with anti-rust wax
- Powder coated cast iron bearing housings
- Mild steel shafts treated with anti-rust wax
- Shaft sealing system – degree of protection IP66/67 (EN60034-5.) See page 37.
- Powder coated die cast aluminum terminal box
- 3-phase induction motors with thermal protector
- Voltage: All common voltages available. Please specify.
- Motor winding insulation Class F
- Dynamically balanced rotor
- Two oil plugs fitted with magnets to filter the oil.
- Oil change recommended every 10,000 operational hours
- Minimum RL. Please refer to pages 31-32
- Maximum RL – Please inquire.
- Non standard RL's available
- To be used in horizontal positions ± 5 degree only

Please note:

- **Noise-sensitive Areas:** High speed 2-pole motors can cause higher noise levels and are not recommended for noise-sensitive areas
- **Technical Precautions for Design, Installation, and Maintenance:** pages 80-90
- **Environmental Considerations:** pages 78-79
- **Optional Extras:** page 29
- **Electrical Connection Diagrams:** pages 94-101

STAINLESS STEEL options

TS9N

- Stainless steel shell – AISI 304 range
- Stainless steel shafts – AISI 303/4 range
- Stainless steel covered bearing housings – AISI 316 range
- Stainless steel oil plugs – AISI 304 range – one out of two with magnet
- Stainless steel exterior bolts – AISI 304 range
- Regreasable labyrinth seals with grease nipples in stainless steel – AISI 304 range
- Shaft sealing system – degree of protection IP66/67 (EN60034-5).

TS10N

- As TS9N, but without regreasable labyrinth seals.

SEMI-RUST-FREE options

TS11N

- As TS9N, but with crowned mild steel shell treated with anti-rust wax.

TS12N

- As TS10N, but with crowned mild steel shell treated with anti-rust wax.

Other Stainless Options:

- FDA & USDA food grade recognized oil and grease are not included in TS9N to TS12N, but available on request
- Complete Motorized Pulleys in acid resistant stainless steel – AISI 316 range – available on request.
- Special mounting brackets are available.

Electrical connection options:

- Salt water resistant powder coated aluminum terminal box with zinc plated exterior bolts
- Stainless steel terminal box – AISI 304 range (max. 5.5 HP)
- Straight stainless steel connector with flying lead – AISI 304 range.

Please specify required TS-number when ordering Stainless Steel options.



OPTIONAL EXTRAS

Motorized Pulley 320M & 320H

Specification	Availability
Total stainless steel option AISI 304 range TS9N with regreasable labyrinth seals	x
Total stainless steel option AISI 304 range TS10N standard seals	x
Semi-rust free option TS11N with regreasable labyrinth seals	x
Semi-rust free option TS12N with standard seals	x
Regreasable labyrinth seals	x
Food grade oil & grease - FDA & USDA regognized	x
Dust explosion proof Motorized Pulleys - ATEX 95 - Zone 22 - fpr applications handling dusty grain etc. According to European Directive 94/9/EC.	o
Total acid resistant stainless steel option - AISI 316	x
Black rubber lagging - Standard specifications (See pages 82-83.)	
5/16" diamond lagging - Hardness 60 +/- 5 Shore A <= 7.5 HP	x
1/4" diamond lagging - Hardness 60 +/- 5 Shore A 10 HP	o
White smooth rubber lagging (FDA listed) Oil, fat & grease resistant	o
Special lagging (e.g. hot vulcanized)	o
Electromagnetic brake Min RL increases by 3.94"	x
Mechanical backstop Min RL increases by 1.97"	x
Modified for vertical mounting	o
Modified for mounting between 5° and 90° (e.g. for magnetic separators)	o
Insulation class F with standard oil: (Allowable ambient temperature -13°F /+104°F)	x
Insulation class H with sunthetic oil: (Allowable ambient temperature -13°F /+120°F)	Std.
Special motors for applications with no belt contact	o
Low noise drives for noise sensitive areas	x
Parallel shell (i.e. no crown)	x
Thermal protector	Std.
IP66/67 Yellow powder coated aluminum terminal box	Std.
IP66/67 Compact powder coated aluminum terminal box (food grade approved) <= 5.5 HP only	o
IP66/67 Compact stainless steel terminal box - AISI 304 or 316 range <= 5.5 HP only	o
Straight or elbow connector with standard power cord (stainless steel in AISI 304 range) <= 5.5 HP only	x
Straight connector with screened power cord <= 5.5 HP only	x
Voltage: single voltage (460) stator (Y winding) wired for 460v/3ph/60Hz at terminal box	Std.
single voltage (230) stator (YY winding) wired for 230v/3ph/60Hz at terminal box	x
Special voltage motors	x
CSA approved motors	x


x = Optional extras

o = An option with certain limitations. Please refer to Technical Precautiopns pages 80-90.

Std. = Fitted as standard.




Motorized Pulley 320M & 320H, Ø 12.64 in. (321 mm)

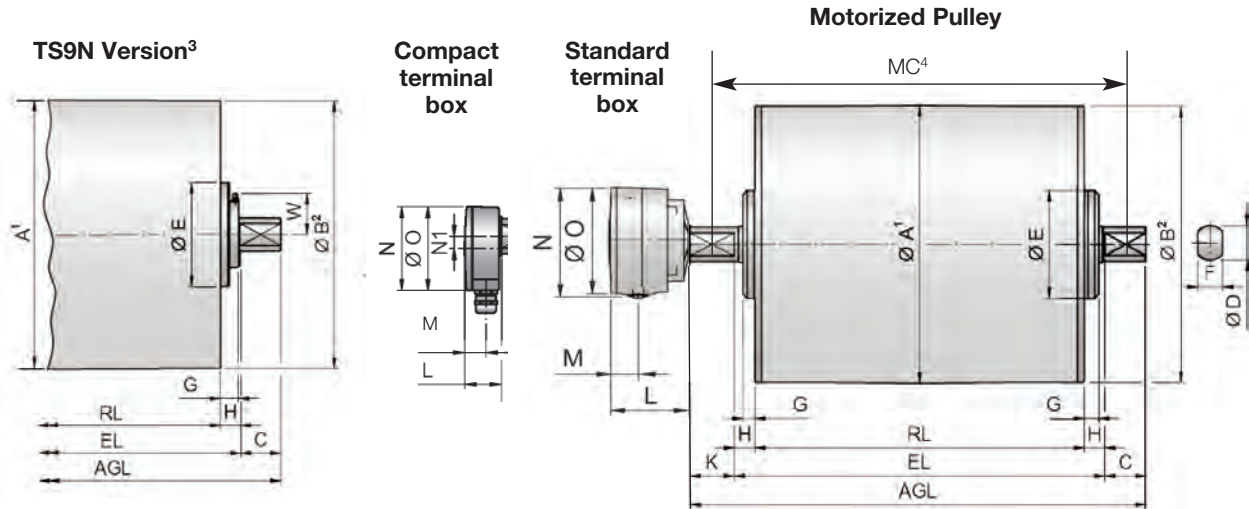


Model/Version	Dimensions									Standard terminal box				
	A in	B in	C in	D in	E in	F in	G in	H in	W in	K in	L in	M in	N in	O in
320M Stan.	12.64	12.56	1.97	1.57	4.92	1.18	0.69	0.98	-	2.13	3.43	1.06	5.08	5.04
320H Stan.	12.64	12.56	1.97	1.97	5.83	1.57	0.43	0.98	-	2.13	3.43	1.06	5.08	5.04
320M TS9N	12.64	12.56	1.97	1.57	4.92	1.18	0.89	0.98	2.20	2.13	3.43	1.06	5.08	5.04
320H TS9N	12.64	12.56	1.97	1.97	5.83	1.57	0.81	0.98	2.20	2.13	3.43	1.06	5.08	5.04

- 1 A dimension is outer diameter of crowned unlagged pulley shell at pulley centerline.
- 2 B dimension is outer diameter of crowned unlagged pulley shell at each end of shell.
- 3 Pulley shown is TS9N version with regreasable seals.
- 4 Mounting centers = MC = RL + W1.

Model/Version	Compact terminal box ⁶					Straight connector ⁶			Elbow connector ⁶			
	K in	L in	M in	N in	N1 in	K in	U in	V in	K in	N in	R in	T in
320M Stan.	2.13	1.61	0.95	3.74	0.55	2.13	0.16	1.06	2.13	1.18	0.98	0.59
320H Stan.	2.13	1.61	0.95	3.74	0.55	2.13	0.16	1.06	2.13	1.18	0.98	0.59
320M TS9N	2.13	1.61	0.95	3.74	0.55	2.13	0.16	1.06	2.13	1.18	0.98	0.59
320H TS9N	2.13	1.61	0.95	3.74	0.55	2.13	0.16	1.06	2.13	1.18	0.98	0.59

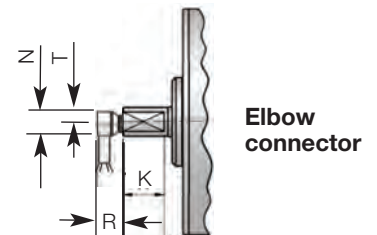

Elbow connector




Straight connector

⁶ These connection options are only available In Motorized Pulleys at 5.5 HP and less.



Motorized Pulley 320M & 320H, Ø 12.64 in. (321 mm) 60 Hz

Mounting brackets

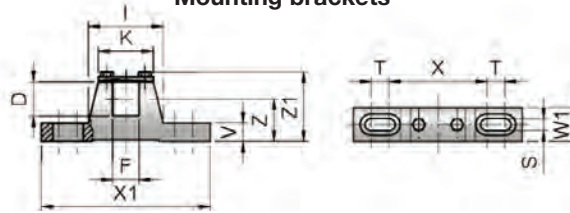

Model	Material	Bracket Size	Part Number	Dimensions											Weight lbs	
				D in	F in	I in	K in	S in	T in	V in	W1 in	X in	X1 in	Z in		Z1 in
320M	Steel painted	KL41-HD	6YA0K	1.57	1.18	3.31	2.44	0.55	0.79	0.87	1.57	4.33	7.48	1.97	3.27	4.63
	Steel Ni plated		6YA0W													
	Stainless steel		6YA0U													
320H	Steel painted	KL42	6YA0J	1.97	1.57	4.76	3.54	0.71	1.18	0.98	1.97	5.91	9.84	2.76	4.33	9.92
	Steel Ni plated		6YA0S													

Motorized Pulley 320M & 320H, Ø 12.64 in. (321 mm) 60 Hz

Motor		No. of Poles	No. Gear Stages	Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Special min. RL in	RL Dimension inches (RL > 78.74" available on request) Weight in lbs ⁵										Type of Bracket		
Power HP										17.72	19.69	21.65	23.62	25.59	27.56	29.53	31.50	33.46	longer than 33.46			
1	12	3	320H	24	25	1241	7868	21.65	-	-	308	317	329	341	354	366	378	See Foot-note ⁴	KL42 6YA0J			
				30	32	984																
		2	320M	38	41	774	4496	19.69	-	251	261	271	281	291	301	310	320					KL41-HD 6YA0K
				48	54	581																
				60	69	461																
				76	83	377																
				96	108	291																
				120	135	233																
				150	166	190																
				192	212	148																
1.5	12	3	320H	24	25	1821	7868	21.65	-	-	308	317	329	341	354	366	378	See Foot-note ⁴	KL42 6YA0J			
				30	32	1444																
		2	320M	38	41	1128	4496	19.69	-	251	261	271	281	291	301	310	320					
				48	54	851																
	8	2	320M	60	61	752	4496	19.69	-	251	261	271	281	291	301	310	320					KL41-HD 6YA0K
				76	81	568																
				96	103	450																
				120	126	368																
				150	162	285																
				192	203	228																
				240	249	186																
				300	319	145																

← Special RL | Standard RL →

- Use "nominal belt speed" to specify pulley. "Actual belt speed" is presented (for pulley lagged with 5/16" thick rubber) to assist with process design calculations. See Technical Precautions page 81. Note that "actual belt speed" decreases when lagging is not used due to decreased pulley diameter.
- Belt pull value allows for gearbox loss.
- Pulley must not be subjected to radial load exceeding "Maximum radial load" defined above. See "Belt Tension" section in Technical Precautions, page 82.
- Additional Motorized Pulley weight, specified per Roller Length: 31.50" ≤ RL < 62.99" Wt = 6.1 lbs/in; 62.99" ≤ RL ≤ 78.74" Wt = 11.7 lbs/in
- Weights above are for pulleys with 5/16" lagging and do not include mounting brackets. To calculate unlagged pulley wt. subtract 0.5 lbs/in of RL from above.

Rulmeca offers return, snub, and idler pulleys with dimensions to match our Motorized Pulleys on request.



Motorized Pulley 320M & 320H, Ø 12.64 in. (321 mm) 60 Hz

Motor		No. Gear Stages	Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Min. RL in	RL Dimension inches (RL > 78.74" available on request) Weight in lbs ⁵										Type of Bracket
Power HP	No. of Poles								17.72	19.69	21.65	23.62	25.59	27.56	29.53	31.50	33.46	longer than 33.46"	
2	8	3	320H	38 48	39 49	1574 1253	7868	21.65	-	-	308*	317	329	341	354	366	378	KL42 6YA0J	
		2	320M	60 76 96 120 150 192 240 300	68 84 104 127 164 205 251 322	903 731 590 483 374 299 245 191	4496	19.69	-	252*	261	271	281	291	301	310	320	KL41-HD 6YA0K	
3	8	3	320H	38 48	39 49	2361 1879	7868	21.65	-	-	308*	317	329	341	354	369	378	KL42	
		2	320M	60 76 96	68 84 104	1354 1096 885	4496	19.69	-	252*	261	271	281	291	301	310	320	KL41-HD 6YA0K	
	4	2	320M	120 150 192 240 300 384 480 600	136 168 207 253 328 410 502 643	677 548 445 364 281 225 183 143	4496	19.69	-	229*	239	249	258	268	278	288	298	KL41-HD 6YA0K	
4	6	3	320H	48 60 76	52 65 79	2361 1889 1554	7868	21.65	-	-	308*	317	329	341	354	366	378	KL42 6YA0J	
		2	320M	96	91	1349	4496	19.69	-	229*	239	249	258	268	278	288	298	KL41-HD 6YA0K	
5.5	6	3	320H	76 96 120	79 102 128	2137 1655 1319	7868	21.65	-	-	308*	317	329	341	354	366	378	KL42 6YA0J	
		4	2	320M	150 192 240 300 384 480 600	168 207 253 328 410 502 643	1005 815 667 515 412 336 263	4496	19.69	-	252*	261	271	281	291	301	310	320	KL41-HD 6YA0K
7.5	4	3	320H	96 120 150	97 118 153	2373 1951 1504	7868	21.65	-	-	308*	317	329	341	354	366	378	KL42 6YA0J	
		2	320M	192 240 300 384 480 600	207 253 328 410 502 643	1112 910 702 561 459 358	4496	19.69	-	252*	261	271	281	291	301	310	320	KL41-HD 6YA0K	
10	3	3	320H	150 192 240	157 194 237	1955 1582 1295	7868	21.65	-	-	308*	317	329	341	354	366	378	KL42 6YA0J	
		2	320M	300 384 480 600	335 415 506 655	916 740 607 469	4496	19.69	-	252*	261	271	281	291	301	310	320	KL41-HD 6YA0K	
15	2	3	320H	240 300 384 480	237 307 384 470	1942 1500 1199 979	7868	43.31	-	-	-	-	-	-	-	-	-	KL42 6YA0J	
		2	320M	600	655	703	4496	43.31	←	Special RL	Standard RL	→	-	-	-	-	-	-	KL41-HD


- Use "nominal belt speed" to specify pulley. "Actual belt speed" is presented (for pulley lagged with 5/16" thick rubber) to assist with process design calculations. See Technical Precautions page 81. Note that "actual belt speed" decreases when lagging is not used due to decreased pulley diameter.
- Belt pull value allows for gearbox loss on a lagged pulley.
- Pulley must not be subjected to radial load exceeding "Maximum radial load" defined above. See "Belt Tension" section in Technical Precautions, page 82.
- Additional Motorized Pulley weight, specified per Roller Length: 31.50" ≤ RL < 62.99" Wt = 6.1 lbs/in; 62.99" ≤ RL ≤ 78.74" Wt = 11.7 lbs/in
- Weights above are for pulleys with 5/16" lagging and do not include mounting brackets. To calculate unlagged pulley wt. subtract 0.5 lbs/in of RL from above.
- * Special "Short Roller Length" option.



Motorized Pulley 320M, Ø 12.64 in. (321 mm)

Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
1	Shell	24.2	Shaft oil seal inner	66	Waved spring washer
1.1	Shell (ss option)	24.3	Shaft oil seal outer (lab. option)	67	Waved spring washer
2	End housing	24.4	Shaft oil seal inner (lab. option)	68	Key
2.1	End housing (ss option)	25	O-ring	70	Waved spring washer
3	End housing	26	Bearing	75	Gasket
3.1	End housing (ss option)	27	Bearing	78	Gasket
8	Geared rim	28	Bearing	79	Holding clip or plastic tie
9	Rotor pinion	29	Bearing	81	Pinion shaft
10	Input wheel	30	Bearing	85	Intermediate flange for backstop
11	Output pinion	31	Bearing	85.1	Intermediate flange for brake assy
12	Gear box	32	Retaining ring	90	Backstop
13	Front shaft	33	Retaining ring	91	Electromagnetic brake
13.1	Front shaft (ss option)	35	Retaining ring	93	Retaining ring
14	Rear shaft	37	Hexagon socket screw	94	Hexagon head screw
14.1	Rear shaft (ss option)	43	Hexagon socket screw	95	Straight connector
15	Stator complete	44	Hexagon socket screw	96	Elbow connector
15.1	Rotor	45	Hexagon head screw	99	Waved spring washer
16	Terminal box complete	46	Hexagon head screw	101	Key
17	Nipple	49	Washer	104	Distance washer
20	Cover	52	Magnetic oil plug	120	Labyrinth cover
20.1	Cover with labyrinth groove	53	Distance washer	121	Set screw
23	Rear flange	53.1	Compression nipple	122	O-ring
23.1	Rear flange for backstop/Brake	60	Parallel pin	123	Grease nipple
24.1	Shaft oil seal outer	64	Prevailing torque type hex.nut	140	Deflection seal
				143	O-ring

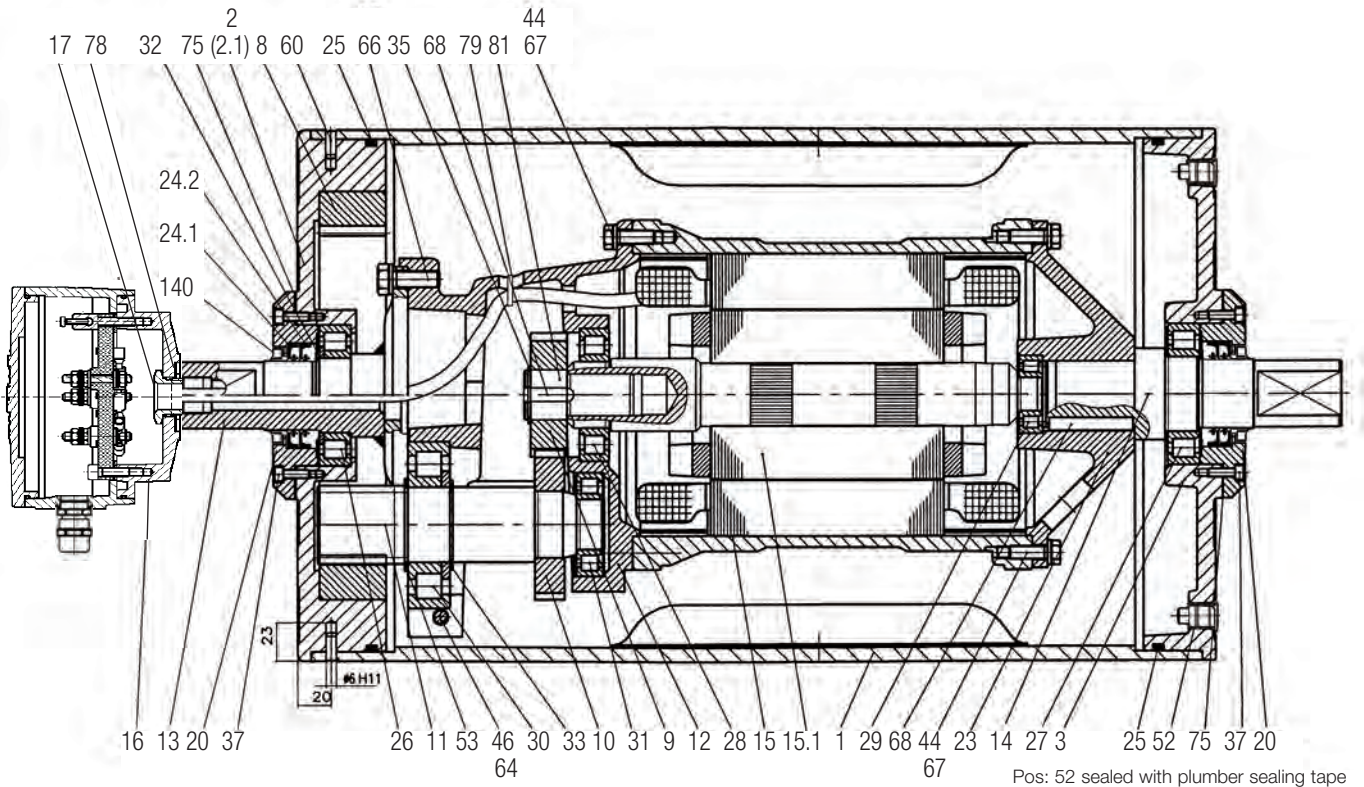




Motorized Pulley 320H, Ø 12.64 in. (321 mm)

Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
1	Shell	17	Nipple	42	Hexagon socket screw
1.1	Shell (ss option)	20	Cover front side	43, 44	Hexagon head screw
2	End housing	20.1	Cover with labyrinth groove	45, 46	Hexagon head screw
2.1	End housing (ss option)	21	Cover - rear side	49, 50	Washer
3	End housing	21.1	Cover with labyrinth groove	52	Magnetic oil plug
3.1	End housing (ss option)	23	Rear flange	53	Distance washer
8	Geared rim	23.1	Rear flange for brake option	53.1	Compression nipple
9	Rotor pinion	24.1	Shaft oil seal outer	58	Washer
10	Input wheel	24.2	Shaft oil seal inner	60	Parallel pin
11	Output pinion	24.3	Shaft oil seal outer (lab. option)	64	Hexagon head nut
12	Gear box	24.4	Shaft oil seal inner (lab. option)	66	Waved spring washer
13	Front shaft	25	O-ring	67	Waved spring washer
13.1	Front shaft (ss option)	26, 27	Bearing	68	Key
14	Rear shaft	28, 29	Bearing	70	Waved spring washer
14.1	Rear shaft (ss option)	30, 31	Bearing	73	Set screw
15	Stator complete	32, 33	Retaining ring	75, 76	Gasket
15.1	Rotor	35	Retaining ring	78	Gasket
16	Terminal box complete	37, 38	Hexagon socket screw		


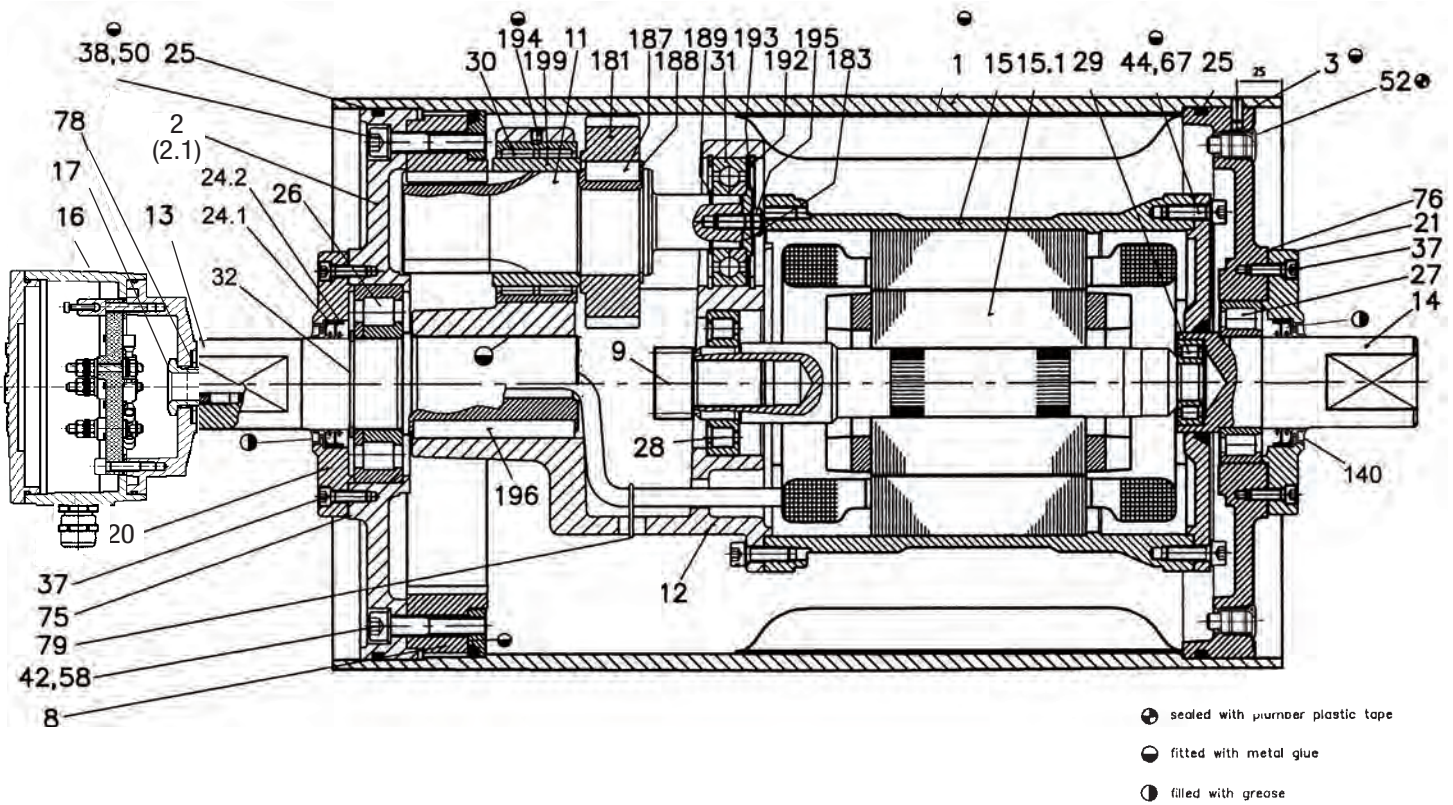




Motorized Pulley 320H, Ø 12.64 in. (321 mm)

Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
79	Holding clip or plastic tie	123	Grease nipple	194	Set screw
80	Hexagon head screw	143	O-ring	195	Prevailing torque type hexagon screw
84	Rear flange for brake	146	Special shaped compression washer	196	Key
85	Intermediate flange for backstop	180	Intermediate pinion shaft	197	Retaining ring
85.1	Intermediate flange for brake assembly	181	Intermediate pinion	198	Distance ring
90	Backstop	182	Distance bushing	199	Bushing, output pinion
91	Electromagnetic brake	183	Washer	200	Rubber seal
93	Retaining ring	184	Roller bearing		
94	Hexagon head screw	185	Roller bearing		
95	Straight connector	186	Key		
96	Elbow connector	187	Key		
99	Waved spring washer	188	Retaining ring		
101	Key	189	Retaining ring		
104	Distance washer	190	Retaining ring		
120	Labyrinth cover	191	Retaining ring		
121	Set screw	192	Retaining ring		
122	O-ring	193	Distance washer		

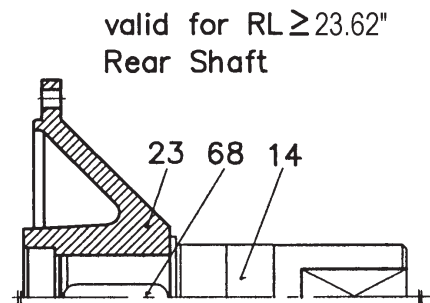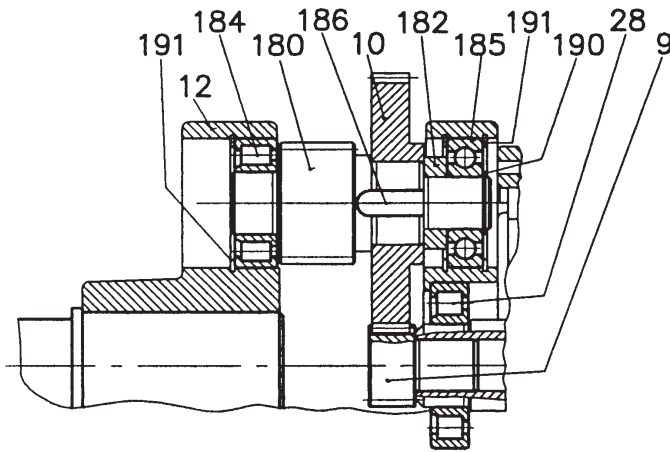





Motorized Pulley 320M & 320H, Ø 12.64 in. (321 mm)

Sectional drawings


Carbon Steel Shell & Shaft
with Labrinth Option

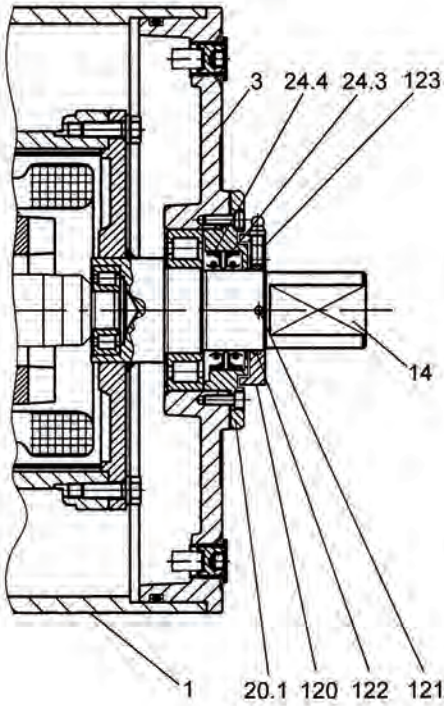


320M & 320H Stainless Steel with Labyrinth Options TS9N
(Position 1 for carbon steel shell valid for TS11N only)
(Position 21.1 valid for 320H only)

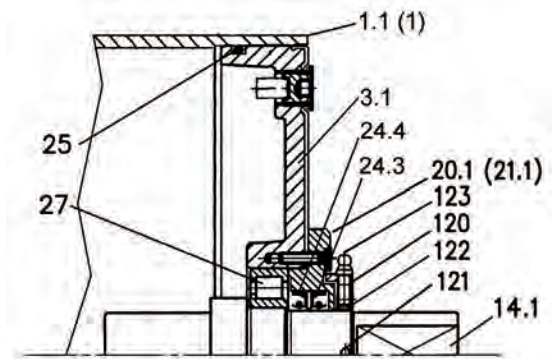


320M & 320H Stainless Steel Non-Labyrinth Options TS10N
(Position 1 for carbon steel shell valid for TS12N only)
(Position 21 valid for 320H only)

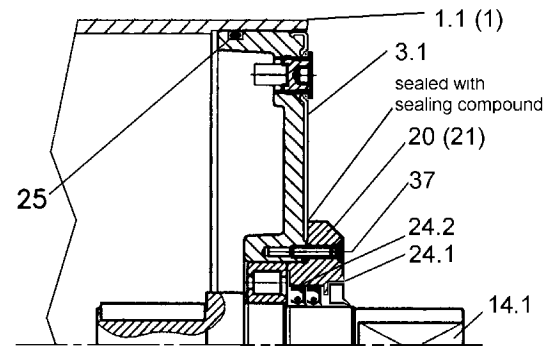


Electromagnetic Brake Option

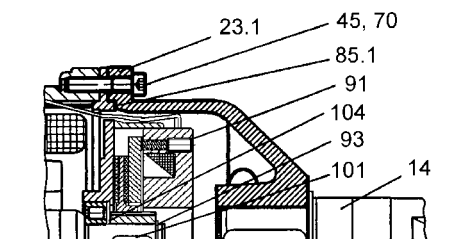


Backstop Option

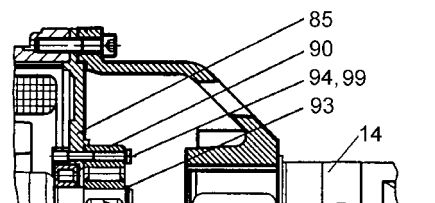

Elbow Connector



Straight Connector





International Protection (IP) Ratings

Protection against solid bodies

IP	Symbol	Test Definition
0		Not Protected
1		Protected against touch with the flat of the hand and large solid objects greater than 50mm
2		Protected against finger-touch and solid objects greater than 12mm.
3		Protected against solid objects greater than 2.5mm
4		Protected against solid objects greater than 1.0mm.
5		Dust-protected Dust shall not penetrate in a quantity to interfere with the satisfactory operation of the apparatus.
6		Dust-tight

Protection of internal equipment against harmful ingress of water

IP	Symbol	Test Definition
0		Not Protected
1		Protected against dripping water.
2		Protected against dripping water when tilted up 15°.
3		Protected against spraying water.
4		Protected against splashing water.
5		Protected against water jets (P1 nozzle 6.3mm, water delivery rate 12.5 l/min ± 5%)
6		Protected from projections of water similar to marine swells (P2 nozzle 12.5mm, water delivery rate 100 l/min ± 5%)
7		Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily (30 min.) immersed 1 meter in water under standardized conditions of pressure and time
8		Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be agreed between manufacturer and the user, but are more severe than for no. 7
9		Protected from four, 30 second, 1,500 psi, spray tests, each at 4" to 6", at 180° F, at 4 gpm, at four different angles



Motorized Pulley 400M & 400H, Ø 15.91 in. (404 mm)

Our 15.91" diameter Motorized Pulley range offers three different performance levels for BULK applications:

- M for Medium duty
- H for Heavy duty

It is important to note the product differences and choose the appropriate pulley based on estimated belt tension (radial load.) See page 82. The actual radial load must be less than the maximum allowable radial load shown in this catalog.

Be aware of increased belt tensions required to drive multi-ply thick heavy belts and/or larger belt widths.

If the 15.91" diameter model is not strong enough to resist estimated belt tension, then select 19.72" diameter model.

M for Medium duty

400M is designed for tough and irregular operating conditions. 400M is typically used in heavy mobile crushing & screening applications as well as in crushed stone, ore, cement, steel, and fertilizer handling.

H for Heavy duty

A solid 3-stage gearbox enables the 400H to provide low speed at high torque and handle irregular loadings in harsh operating conditions.

STANDARD SPECIFICATION of Motorized Pulley

- Crowned mild steel 15.91" diameter steel shell painted yellow at a minimum thickness of 2.4 mils
- Bolted powder coated cast iron bearing housings and covers, all painted yellow at a minimum thickness of 2.4 mils
- Mild steel shafts treated w/anti-rust wax
- Shaft sealing system - degree of protection IP66/67 (EN60034-5.) See pg 37.
- Cast iron terminal box for painted yellow at min.thickness of 2.4 mils
- 3-phase induction motors with thermal protector
- Voltage: All common voltages available. Please specify.
- Motor winding insulation Class F
- Dynamically balanced rotor
- Two oil plugs each fitted with a magnet to filter the oil
- Oil change recommended every 10,000 operational hours
- Minimum RL. Refer to page 41
- Maximum RL - Please inquire
- Non standard RL's available
- To be used in horizontal positions ±5 degree only

Please note:

- **Noise-sensitive Areas:** High speed 2-pole motors can cause higher noise levels and are not recommended for noise-sensitive areas
- **Technical Precautions for Design, Installation, and Maintenance:** pages 80-90
- **Environmental Considerations:** pages 78-79
- **Optional Extras:** page 39
- **Electrical Connection Diagrams:** pages 94-101

STAINLESS STEEL options

TS9N

- Stainless steel shell - AISI 304 range
- Stainless steel shafts - AISI 303/4 range
- Stainless steel covered bearing housings AISI 316 range

- Regreasable bearing covers with labyrinth grooves and labyrinth seals with grease nipples in stainless steel AISI 304 range
- Stainless steel oil plugs - AISI 304 range - one out of two with magnet
- Stainless steel exterior bolts - AISI 304 range
- Shaft sealing system - degree of protection IP66/67 (EN60034-5) See pg 37

TS10N

- As TS9, but without regreasable labyrinth seals

SEMI-RUST-FREE options

TS 11N

- Polyurethane painted mild steel shell - min. thickness of 4.7 mils
- Stainless steel shafts - AISI 303/4 range
- Stainless steel covered cast iron bearing housing - AISI 316 range
- Regreasable bearing covers with labyrinth grooves and grease nipples in stainless steel - AISI 304 range
- Stainless steel oil plugs - AISI 304 range - one out of two with magnet
- Stainless steel exterior bolts - AISI 304 range
- Shaft sealing system - degree of protection IP66/67 (EN60034-5)
- Powder coated terminal box for 400L
- Polyurethane painted terminal box - min. thickness of 4.7 mils for 400M & 400H

TS12N

- As TS11N, but without regreasable seals.
- Covers - standard

Other Stainless Options:

- FDA & USDA food grade recognized oil and grease are not included in TS9N - TS12N, but available on request
- Complete Motorized Pulleys in acid resistant stainless steel - AISI 316 range - available on request.
- Special mounting brackets available

Please specify required TS-number when ordering Stainless Steel options.



OPTIONAL EXTRAS

Motorized Pulley 400M & 400H

Specification	Availability	
Total stainless steel option AISI 304 range	TS9N with regreasable labyrinth seals	x
Total stainless steel option AISI 304 range	TS10N with standard seals	x
Semi-rust free option	TS11N with regreasable labyrinth seals	x
Semi-rust free option	TS12N with standard seals	x
Regreasable labyrinth seals		x
Food grade oil & grease - FDA & USDA recognized		x
Dust explosion proof Motorized Pulleys - ATEX 95 - Zone 22 - for applications handling of dusty grain etc. According to European Directive 94/9/EC.		x
Total acid resistant stainless steel option - AISI 316 range		x
Black rubber lagging - Standard specifications (See pages 82-83.)		
5/16" full diamond lagging - Hardness 60 ±5 Shore A ≤ 15 HP		o
5/16" partial diamond lagging - Hardness 60 ±5 Shore A 20 HP		o
White smooth rubber lagging (FDA listed) - Oil, fat & grease resistant		o
Special lagging (e.g. hot vulcanized)		o
Electromagnetic brake	Min RL increases by 3.94"	x
Mechanical backstop	Min. RL = 29.53" for 400M	x
	Min. RL = 31.50" for 400H	x
Modified for vertical mounting		o
Modified for mounting between 5° and 90°		o
Insulation class F with standard oil: (Allowable ambient temperature -13°F/+104°F)		Std.
Insulation class H with synthetic oil: (Allowable ambient temperature -13°F/+120°F)		x
Special motors for applications with no belt contact		o
Low noise drives for noise sensitive areas		x
Parallel shell (i.e. no crown)		x
Thermal protector		Std.
IP66/67 Standard yellow powder coated cast iron terminal box		Std.
Voltage: Single voltage (460) stator (Y winding) wired for 460v/3ph/60 Hz at terminal box		Std
Single voltage (230) stator (YY winding) wired for 230v/3ph/60 Hz at terminal box		x
2 speed motors		x
Special voltage motors		x
Special zinc-rich epoxy paint		x
CSA approved motors		x

x = Optional extras

o = An option with certain limitations. Please refer to Technical precautions pages 80-90.


Std. = Fitted as standard



Motorized Pulley 400M & 400H, Ø 15.91 in. (404 mm)


TS9N Version³

Motorized Pulley

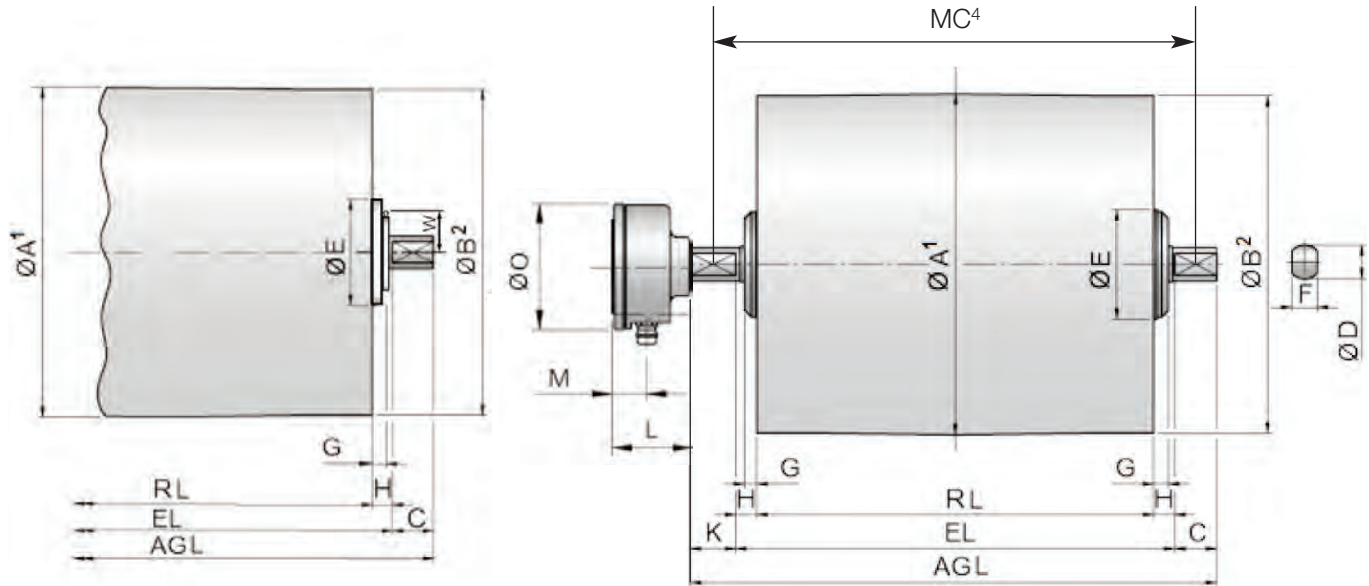

Model	Dimensions													
	A in	B in	C in	D in	E in	F in	G in	H in	K in	L in	M in	O in	W in	
400M & 400H	15.91	15.75	1.97	2.36	7.64	1.77	0.91	0.98	1.97	3.94	1.44	6.14	-	
400M TS9N & 400H TS9N	15.91	15.75	1.97	2.36	7.64	1.77	??	0.98	1.97	3.94	1.44	6.14	71.5	

- 1 A dimension is outer diameter of unlagged pulley shell at pulley centerline.
- 2 B dimension is outer diameter of unlagged pulley shell at each end of shell.
- 3 Pulley shown is TS9N version with regreasable seals.
- 4 Mounting centers = MC = RL + W1

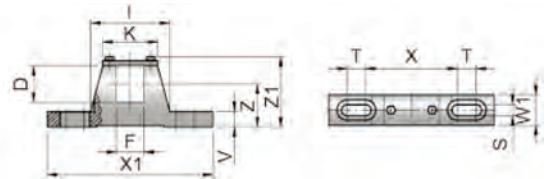

Motorized Pulleys	Material	Bracket Size	Part Number	Dimensions												Weight lbs
				D in	F in	I in	K in	S in	T in	V in	W1 in	X in	X1 in	Z in	Z1 in	
400M & 400H	Steel painted	KL60	6YA09	2.36	1.77	5.12	3.54	0.71	1.18	0.98	1.97	5.91	10.63	2.76	4.53	10.58
	Steel Ni plated		6YA0D													



Motorized Pulley 400M & 400H, Ø 15.91 in. (404 mm) 60 Hz

Motor		No. Gear Stages	Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Min. RL in	RL Dimension inches (RL>78.74" available on request)										Type of Bracket
Power HP	No. of Poles								Weight in lbs ⁵										
									25.59	27.56	29.53	31.50	33.46	35.43	37.40	39.37	longer than 39.37		
3	8	3	400H	38 48 60	44 54 64	2121 1725 1442	11,250	27.56	-	547	563	577	591	605	619	634	See Foot-note ⁴	KL60 6YA09	
		2	400M	76 96 120 150 192 240 300 384	82 101 121 152 197 248 307 390	1131 920 770 610 468 371 302 238	9,100	25.59	456	470	485	500	514	528	542	557			
5.5	8	3	400H	48 60 76	54 64 81	3137 2623 2079	11,250	27.56	-	567	582	597	611	625	639	654			
		2	400M	96 120 150 192 240 300 384	101 121 152 197 248 307 390	1673 1399 1108 851 675 548 432	9,100	25.59	476	490	505	519	534	548	562	576			
7.5	4	3	400H	76 96 120	87 107 128	2651 2156 1803	11,250	27.56	-	547	563	577	591	605	619	634			
		2	400M	150 192 240 300 384 480 600 768	163 201 240 303 395 498 613 778	1413 1150 962 762 585 465 377 297	9,100	25.59	456	470	485	500	514	528	542	557			
10	6	3	400H	96 120 150	108 140 177	2923 2244 1782	11,250	29.53	-	-	602	616	631	645	659	673			
	4	2	400M	192 240 300 384 480 600 768	201 240 303 395 498 613 778	1568 1311 1039 798 633 515 405	9,100	25.59	469	483	499	513	527	541	556	570			
15	4	3	400H	150 192 240	162 211 265	2859 2194 1742	11,250	29.53	-	-	602	616	631	645	659	673			
		2	400M	300 384 480 600 768	303 395 498 613 778	1525 1170 929 754 594	9,100	27.56	-	510	525	539	554	568	582	596			
20	2	3	400H	192 240 300	214 257 323	2940 2459 1949	11,250	29.53	-	-	602	616	631	645	659	673			
		2	400M	384 480 600 768	402 481 607 791	1568 1311 1039 798	9,100	27.56	-	510	525	539	554	568	582	596			

- 1 Use "nominal belt speed" to specify pulley. "Actual belt speed" is presented (for pulley lagged with 5/16" thick rubber) to assist with process design calculations. See Technical Precautions page 81. Note that "actual belt speed" decreases when lagging is not used due to decreased pulley diameter.
- 2 Belt pull value allows for gearbox loss.
- 3 Pulley must not be subjected to radial load exceeding "Maximum radial load" defined above. See "Belt Tension" section in Technical Precautions, page 82.
- 4 Additional Motorized Pulley weight, specified per Roller Length: $39.37 \leq RL \leq 78.74$ Wt = 7.3 lbs/in.
- 5 All weights shown above are for pulleys "fully lagged" with 5/16" thick rubber. For "partially lagged" pulleys add 5% to 10% to the weights shown above. See pages 45, 82, and 83 for "partial lagging." To calculate unlagged pulley weight subtract 0.6 lbs/in of Roller Length from above.



Rulmeca offers return, snub, and idler pulleys with dimensions to match our Motorized Pulleys on request.



Motorized Pulley 400M, Ø 15.91 in. (404 mm)

Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
1	Shell	31	Bearing	101	Key (only with backstop or brake)
2	End housing with geared rim	32	Retaining ring	104	Distance ring
3	End housing	37	Hexagon socket screw	120	Cover with labyrinth groove
8	Geared rim	38	Hexagon socket screw	122	O-ring
9	Rotor pinion	50	Lock washer	123	Grease nipple
10	Input wheel	52	Magnetic oil plug	182	Distance bushing
11	Output pinion	53	Distance washer	182.1	Distance bushing
12	Gearbox	54	Distance washer	187	Key
13	Rear shaft	70	Socket head screw	189	Retaining ring
14	Front shaft	70.1	Hexagon screw	196	Key
15	Stator complete	72	Clamping pin (SS version only)	197	Retaining ring
15.1	Rotor	73	Set screw	202	Motor data plate
16	Terminal box complete	74	Cap (SS version only)		
17	Adapter	74.1	O-ring (SS version only)		
20.1	Cover front & rear side	75	Gasket		
20.2	Cover front & Rear side	77	Gasket		
24	Shaft oil seal - outer	78	Gasket		
24.1	Shaft oil seal - inner	85	Bearing flange		
24.2	Deflection seal	86	Bearing flange		
25	O-ring	90	Backstop (optional)		
26	Bearing	91	Electromagnetic brake		
27	Bearing	92	Retaining ring		
28	Bearing	93	Retaining ring		
29	Bearing	94	Hexagon socket screw		
30	Bearing	99	Lock washer		

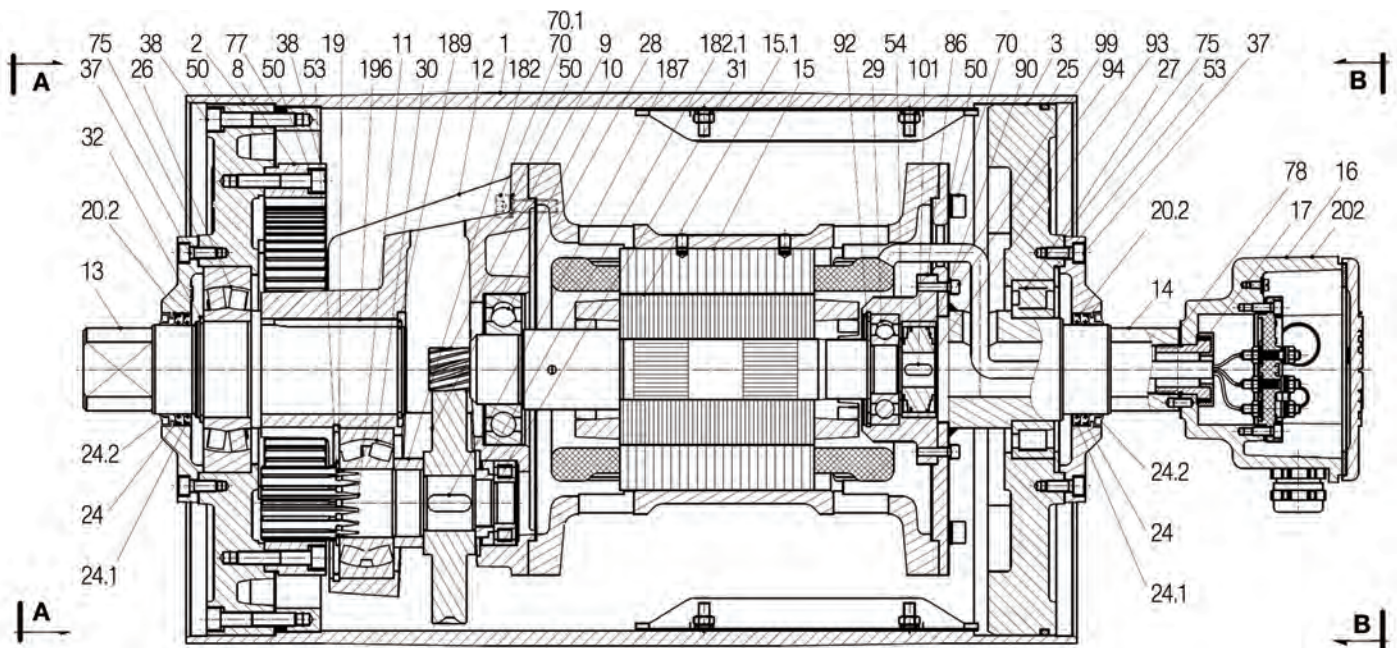
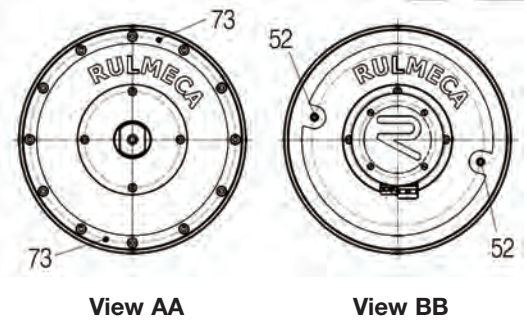




Motorized Pulley 400H, Ø 15.91 in. (404 mm)

Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
1	Shell	36	Hexagon socket screw	120	Cover with labyrinth groove
2	End housing with geared rim	37	Hexagon socket screw	122	O-ring
3	End housing	38	Hexagon socket screw	123	Grease nipple
8	Geared rim	50	Lock washer	180	Intermediate pinion shaft
9	Rotor pinion	52	Magnetic oil plug (see page 42)	181	Intermediate pinion
10	Input wheel	53	Distance washer	182	Distance bushing
11	Output pinion	54	Distance washer	184	Bearing
12	Gearbox	58	Lock washer	185	Bearing
13	Rear shaft	70	Socket head screw	186	Key
14	Front shaft	70.1	Hexagon screw	187	Key
15	Stator complete	72	Clamping pin (SS version only)	188	Retaining ring
15.1	Rotor	73	Set screw (see page 42)	189	Retaining ring
16	Terminal box complete	74	Cap (SS version only)	191	Retaining ring
17	Adapter	74.1	O-ring (SS version only)	196	Key
20.1	Cover front & rear side	75	Gasket	202	Motor data plate
20.2	Cover front & rear side	77	Gasket		
24	Shaft oil seal - outer	78	Gasket		
24.1	Shaft oil seal - inner	85	Bearing flange		
24.2	Deflection seal	86	Intermediate flange		
25	O-ring	90	Backstop (optional)		
26	Bearing	91	Electromagnetic brake		
27	Bearing	92	Retaining ring		
28	Bearing	93	Retaining ring		
29	Bearing	94	Hexagon socket screw		
30	Bearing	99	Lock washer		
31	Bearing	101	Key (only with backstop or brake)		
32	Retaining ring	104	Distance ring		

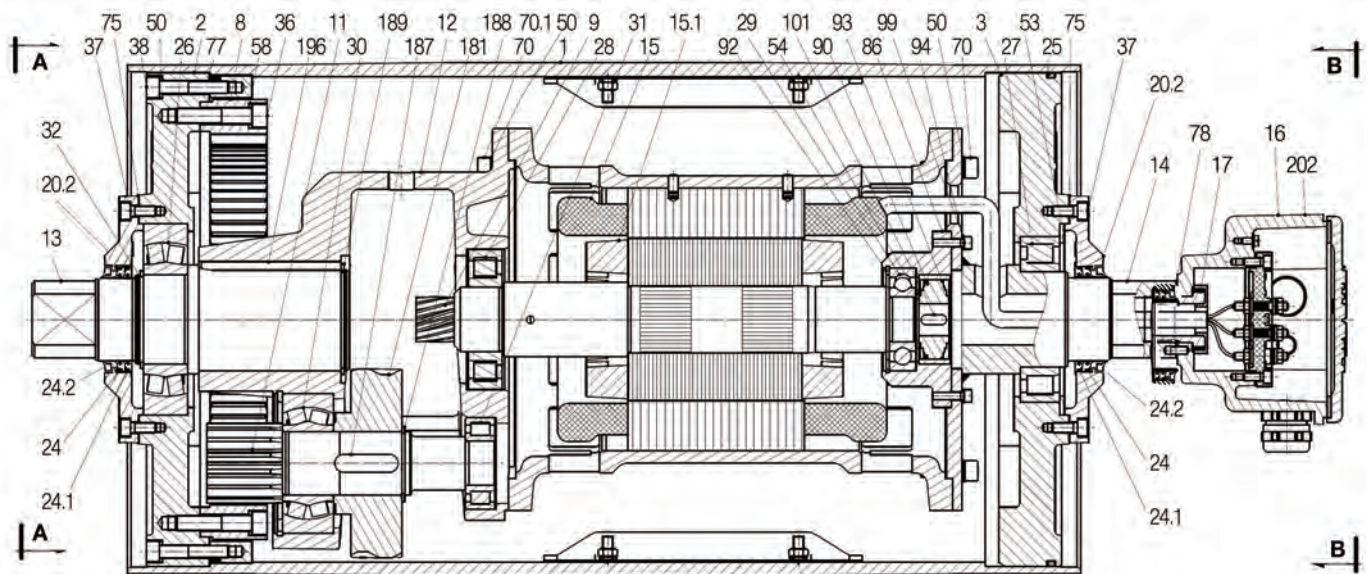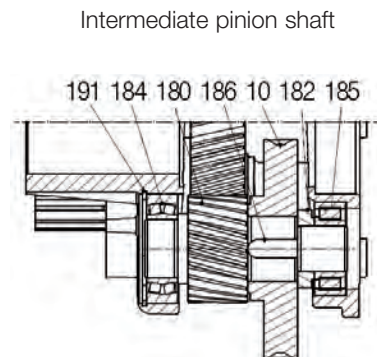






Motorized Pulley 400M & 400H, Ø 15.91 in. (404 mm)

Sectional drawings


Labyrinth Shaft Seal Option

Electromagnetic Brake Option

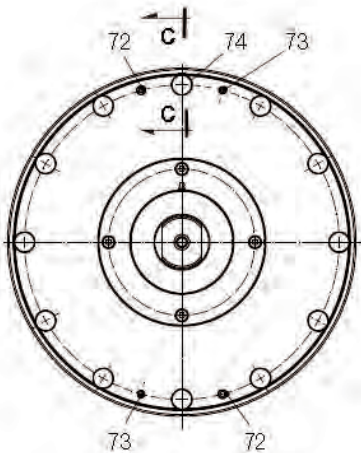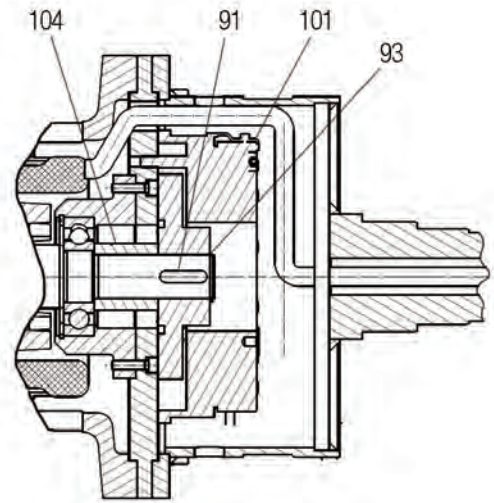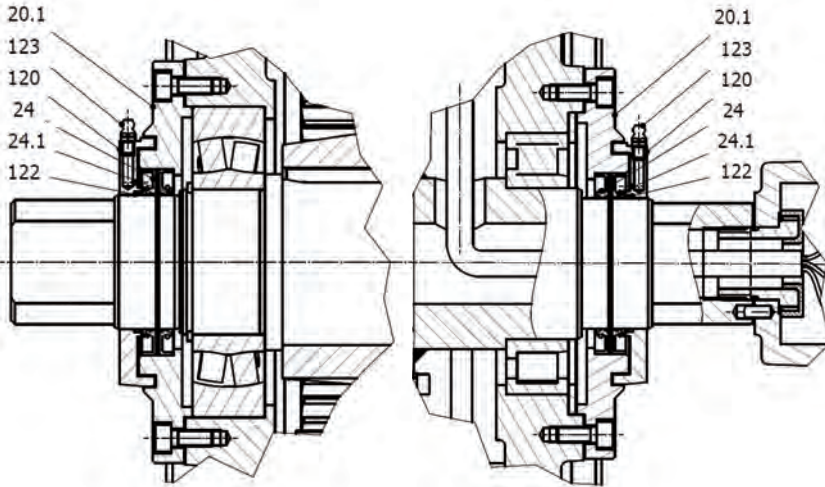


View AA

(Stainless steel version)

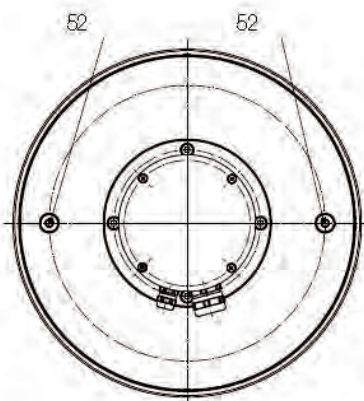

View BB


(Stainless steel version)



Section CC




Motorized Pulleys Lagging Options

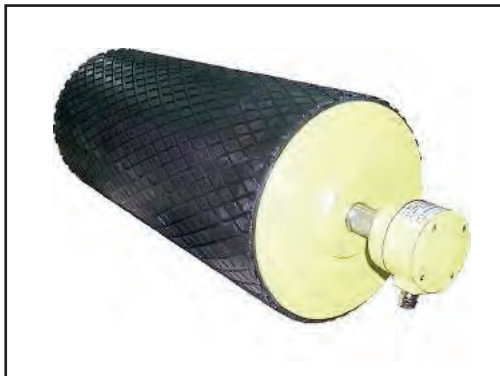

“Full” Diamond Pattern Synthetic Rubber


Most popular lagging is 0.24”, 0.32”, and 0.39” thick cold-bonded black diamond pattern synthetic rubber lagging in 60 durometer +/- 5 (shore hardness A.) This long-lasting material has excellent frictional characteristics in wet or dry, outdoor and indoor applications for single direction and reversing belts. As described on pages 84 & 85, other thicknesses are available as well as smooth, white, oil-resistant, and MSHA rubber. Hot vulcanized bonding is also available.

Technical Precaution: Lagging thickness effects pulley heat dissipation characteristics. Refer to “Lagging Limitations” chart on page 85.

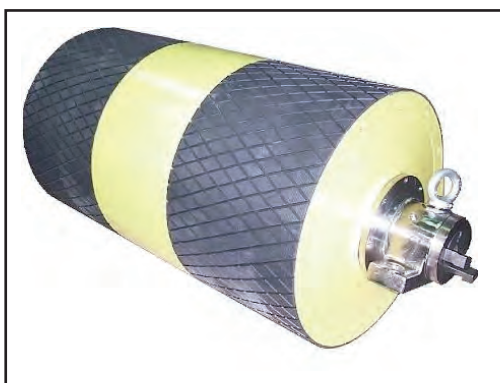

“Partial” Diamond Pattern Synthetic Rubber

Certain power and belt speed combinations require that lagging be restricted to the outer thirds of the pulley face to improve heat dissipation. Each “partially lagged” pulley has an extra thick steel pulley shell in the center of the pulley face. Most popular partial lagging is 0.39” thick cold-bonded black diamond pattern synthetic rubber lagging in 60 durometer +/- 5 (shore hardness A.) As described on pages 84 & 85, other thicknesses are available as well as smooth, white, oil-resistant, and MSHA rubber. Hot vulcanized bonding is also available.

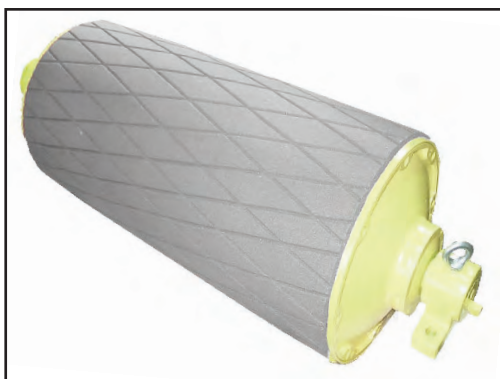

Ceramic - Solid

Solid ceramic lagging is available which is bonded directly to steel pulley face in both diamond pattern (shown in adjacent photo) and rectangular pattern (shown on page 75.) Due to the excellent heat transfer properties of the ceramic material, this lagging is available on the full pulley face regardless of model, power, face width, and belt speed. The porous ceramic material offers a high frictional coefficient and excellent resistance to wear.



Ceramic - Segments Embedded in Rubber

Ceramic plates embedded in rubber offer a good solution for conveyor applications with high wet silt content (e.g. stone and mud handling) or hard material (e.g. taconite pellet handling), especially for drive pulleys working on the “dirty side” of the belt. Since ceramic plates are non-porous, silty material is less likely to plug pores and cause friction loss. Since plates are “cushioned” in rubber, hard material is less likely to crush ceramic lagging between belt and steel pulley face. However, the heat transfer capability of this lagging is not as efficient as solid ceramic. Therefore, partial lagging is required on certain model, power, face width, and belt speed combinations, as described on pages 84 and 85.



Motorized Pulley 500H, Ø 19.72 in. (501 mm)

Our 19.72" diameter Motorized Pulley range offers strong performance BULK applications:

Choose the appropriate pulley motor and speed combination, always checking estimated belt tension (radial load.) See page 82. The actual radial load must be less than the maximum allowable radial load shown in this catalog.

Be aware of increased belt tensions required to drive multi-ply thick heavy belts and/or larger belt widths.

If the 19.72" diameter model is not strong enough to resist estimated belt tension, then select 24.80" diameter model.

Heavy duty

500H has strong internal components, with gearbox, shaft, and bearings designed for tough, irregular, and extreme operating conditions.

STANDARD SPECIFICATION of Motorized Pulley

- Crowned mild steel 19.72" diameter steel shell painted yellow at a minimum thickness of 2.4 mils
- Bolted powder coated cast iron bearing housings and covers, all painted yellow at a minimum thickness of 2.4 mils
- Mild steel shafts
- Shaft sealing system - degree of protection IP66/67 (EN60034-5.) See page 37.
- Cast iron terminal box for painted yellow at min.thickness of 2.4 mils
- 3-phase induction motors with thermal protector
- Voltage: All common voltages available. Please specify.
- Motor winding insulation Class F
- Dynamically balanced rotor
- Two oil plugs each fitted with a magnet to filter the oil
- Yellow painted mounting brackets (AL65 & ALO65) included with 500H
- Oil change recommended every 10,000 operational hours
- Minimum RL. Refer to page 49
- Maximum RL - Please inquire
- Non standard RL's available
- To be used in horizontal positions ± 5 degree only

Please note:

- **Noise-sensitive Areas:** High speed 2-pole motors can cause higher noise levels and are not recommended for noise-sensitive areas
- **Technical Precautions for Design, Installation, and Maintenance:** pages 80-90
- **Environmental Considerations:** pages 78-79
- **Optional Extras:** page 47
- **Electrical Connection Diagrams:** pages 94-101

SEMI-RUST-FREE options

TS11

- Polyurethane painted mild steel shell at minimum thickness of 4.7 mils
- Polyurethane painted cast iron end housings at minimum thickness of 4.7 mils
- Stainless steel covers with labyrinth grooves – AISI 304 range
- Nitrided shaft sleeves
- Zinc-plated oil plugs - each with magnet
- Zinc-plated exterior bolts
- Shaft sealing system – degree of protection P66/67 (EN60034-5) See pg 37.
- Polyurethane painted terminal box at minimum thickness of 4.7 mils
- Nickel plated mounting brackets with labyrinth grooves

TS12

- As TS11, but without regreasable seals.
- Covers - standard

Please note:

- FDA & USDA food grade recognized oil and grease are not included in TS11 & TS12, but available on request

Please specify required TS-number when ordering Stainless Steel options.



OPTIONAL EXTRAS

Motorized Pulley 500H

Specification	Availability
Semi-rust-free option TS11 with regreasable labyrinth seals	x
Semi-rust-free option TS12 with standard seals	x
Regreasable labyrinth seals	x
Dust explosion proof Motorized Pulleys - ATEX 95 - Zone 22 - for applications handling of dusty grain etc. According to European Directive 94/9/EC.	x
Standard black rubber lagging (See pages 82-83.)	
3/8" full smooth lagging - Hardness 60 ±5 Shore A	o
3/8" full diamond lagging - Hardness 60 ±5 Shore A	o
3/8" partial smooth lagging - Hardness 60 ±5 Shore A	o
White smooth rubber lagging (FDA listed) - Oil, fat & grease resistant	o
Special lagging - e.g. hot vulcanized, partial, and ceramic (See page 80.)	o
External brake shaft (for mechanical brake by others)	x
Mechanical backstop Min. RL = 29.53" for 500H	x
Insulation class F with standard oil: (allowable ambient temperature: -13°F/+104°F)	Std.
Insulation class H with synthetic oil: (allowable ambient temperature: -13°F/+120°F)	x
Parallel shell	x
Thermal protection switch	Std.
Temperature monitoring device (PT100 RTD)	x
Thermal protection switch and temperature monitoring device (PT100 RTD)	x
Voltage: Single voltage (460) stator (Y winding) wired for 460v/3ph/60 Hz at terminal box	Std.
IP66/67 Standard yellow powder coated cast iron terminal box	Std.
Special voltage motors	x
CSA approved motors	x
Special zinc-rich epoxy paint	x

x = Optional extras




o = An option with certain limitations. Please refer to Technical precautions pages 80-90.

Std. = Fitted as standard





Motorized Pulley 500H, Ø 19.72 in. (501 mm)

Motorized Pulley with terminal box

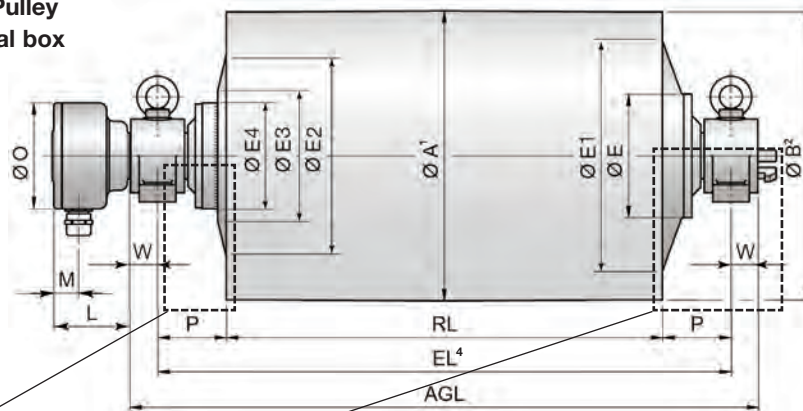



Optional external brake shaft



Model	Dimensions																		
	A	B	D ³	E	E1	E2	E3	E4	G	G1	G2	G3	G4	L	M	O	P	Y	
	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in
500H	19.72	19.57	2.56	7.56	16.73	15.83	9.45	7.62	3.74	0.9	3.35	1.57	3.35	3.94	1.44	6.14	5.91	2.0	
500H (30 & 40 HP)	19.72	19.57	2.56	7.56	16.73	15.83	9.45	7.62	3.74	0.9	3.35	1.57	3.35	6.50	2.13	9.06	5.91	2.0	

- 1 A dimension is outer diameter of unlagged pulley shell at pulley centerline.
- 2 B dimension is outer diameter of unlagged pulley shell at each end of shell.
- 3 D dimension is shaft diameter.
- 4 EL = mounting centers.

Mounting brackets

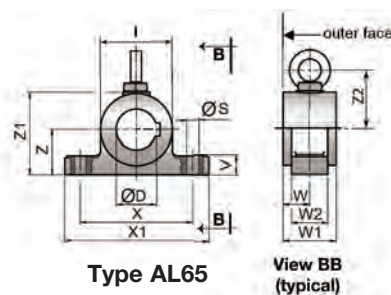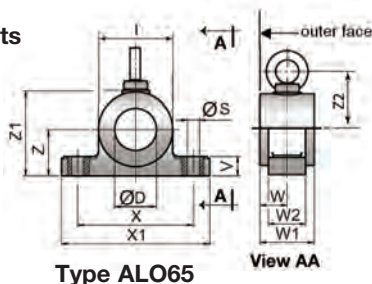

Motorized Pulleys	Material	Bracket Type	Dimensions												Weight		
			D	I	S	V	W	W1	W2	X	X1	Z	Z1	Z2			
Model			in	in	in	in	in	in	in	in	in	in	in	in	in	in	lbs
500H	Cast iron	AL65 / ALO65	2.56	4.53	0.91	1.34	1.85	3.54	2.36	7.09	9.45	3.15	5.55	3.65	17.64		



Motorized Pulley 500H, Ø 19.72 in. (501 mm)

60 Hz

Motor			Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Min. RL in	RL Dimension inches (RL>78.74" available on request) Weight in lbs ⁵										Type of Bracket			
Power HP	No. of Poles	No. Gear Stages							29.53	31.50	33.46	35.43	37.40	39.37	41.34	43.31	45.28	longer than 45.28				
7.5	8	2	500H	120* 150* 192	126 161 211	1839 1442 1097	10,340	29.53													See Foot-note ⁴ AL65& ALO65	
	6	2	500H	240 300 384 480 600	281 313 390 476 626	823 739 592 486 369			775	797	819	839	861	878	897	916	936					
10	8	2	500H	120* 150 192	126 161 211	2509 1966 1496																
	6	2	500H	240 300 384 480 600	281 313 390 476 626	1122 1007 807 662 504			797	819	841	861	883	898	917	936	956					
15	6	2	500H	192 240 300 384 480 600	214 281 313 390 476 626	2163 1645 1477 1185 970 739			819	841	863	883	905	920	939	958	978					
20	4	2	500H	240* 300 384 480 600 760	251 321 421 469 585 715	2509 1966 1496 1343 1077 882			844	863	881	900	918	940	959	978	999					
25	4	2	500H	300 384 480 600 760	321 421 469 585 715	2425 1845 1656 1328 1089			866	885	903	922	940	962	981	1000	1020					
30	4	2	500H	300 384	321 421	2877 2210																
	2			480* 600* 760	502 642 843	1839 1442 1097			29.53	866	885	903	922	940	959	978	997	1017				
40	4	2	500H	384 480 600 760	421 469 585 715	2925 2626 2105 1722			33.46	-	-	1090	1109	1127	1146	1165	1184	1204				

- 1 Use "nominal belt speed" to specify pulley. "Actual belt speed" is presented (for pulley lagged with 3/8" thick material) to assist with process design calculations. See Technical Precautions page 81. Note that "actual belt speed" decreases when lagging is not used due to decreased pulley diameter.
 - 2 Belt pull value allows for gearbox loss.
 - 3 Pulley must not be subjected to radial load exceeding "Maximum radial load" defined above. See "Belt Tension" section in Technical Precautions, page 82.
 - 4 Additional Motorized Pulley weight, specified per Roller Length: $45.28 \leq RL \leq 78.74$ " Wt = 9.8 lbs/in.
 - 5 All weights shown above include mounting brackets and are for pulleys "fully lagged" with 3/8" thick material (i.e. rubber for 7.5 - 30 HP and solid ceramic for 40 HP). For "partially lagged" pulleys add 6% to 10% to the weights shown above. See pages 45, 82, & 83 for "partial lagging." To calculate unlagged pulley weight subtract 0.9 lbs/in of Roller Length from above.
- * External brake shaft option is not available in these belt speeds.


Rulmeca offers return, snub, and idler pulleys with dimensions to match our Motorized Pulleys on request.



Motorized Pulley 500H, Ø 19.72 in. (501 mm)

Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
1	Shell	24.4	Shaft oil seal inner (lab option)	77	Gasket
4	End housing with geared rim	26	Bearing	78	Gasket
8	Geared rim	27	Bearing	79	Holding plate
9	Rotor pinion	30	Bearing	85	Motor flange for backstop/brake
10	Input wheel	31	Bearing	90	Backstop
11	Output pinion	32	Retaining ring	90.1	Backstop housing
12	Gear box including rear shaft	33	Retaining ring	90.2	Backstop cover
13	Front shaft	34	Retaining ring	93	Backstop retaining ring
14	Rear shaft	35	Retaining ring	94	Backstop hex head screw
15	Stator complete	37	Hexagon socket screw	99	Backstop spring washer
15.1	Rotor	38	Hexagon socket screw	101	Backstop key
16	Terminal box complete	42	Hexagon head screw	123	Grease nipple
17	Nipple	44	Hexagon head screw	130	Brake shaft
18	Mounting brackets rear side	45	Hexagon head screw	131	Mounting bracket bearing cover
18.1	Mounting bracket w/lab rear side	50	Washer	132	Roller bearing
19	Mounting bracket front side	51	Gasket	133	Brake shaft seal
19.1	Mounting brackets w/lab front side	52	Magnetic oil plug	134	Brake shaft seal
20	Cover – front side	58	Spring washer	135	Retaining ring
20.1	Cover with labyrinth groove	68	Key	136	Bolts - bearing cover
21	Cover – rear side	69	Gib key	137	Spring lock washer
22.1	Cover with labyrinth groove	70	Waved spring washer	138	Key
23	Rear flange	72	Grooved pin	139	Retaining ring
24.1	Shaft oil seal outer	73	Set screw	140	Key
24.2	Shaft oil seal inner	75	Gasket		
24.3	Shaft oil seal outer (lab option)	76	Gasket		

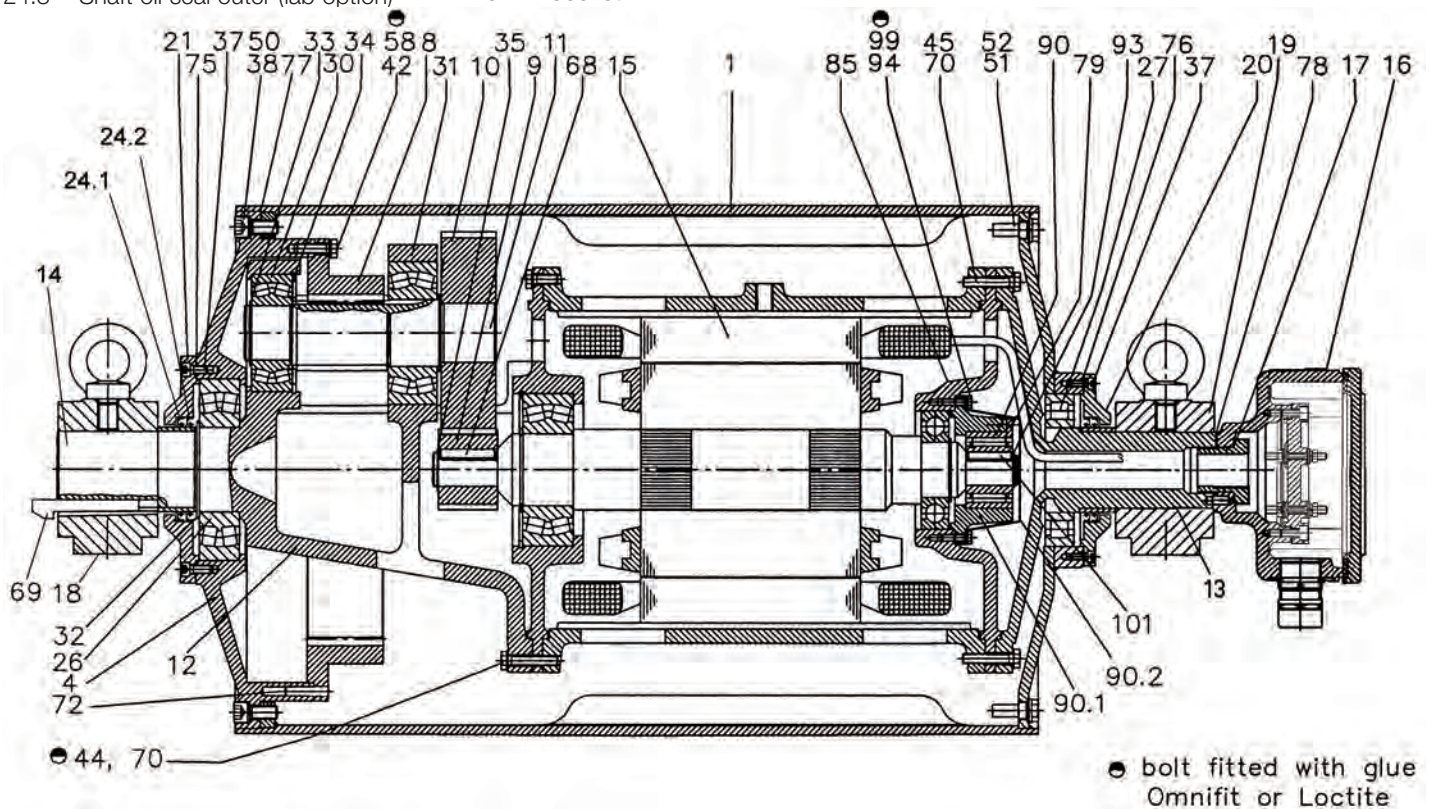


Cross sectional drawing shows optional backstop.




Motorized Pulley 500H, Ø 19.72 in. (501 mm)

Sectional drawings (See parts list on page 50.)

Labyrinth Seal Option

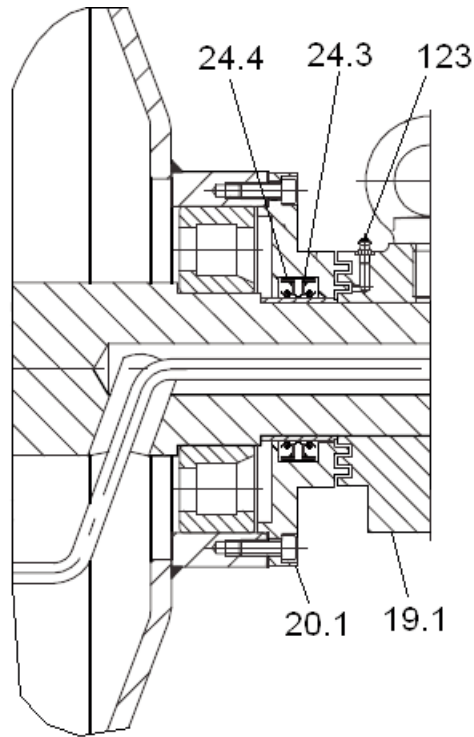

External Brake Shaft Option

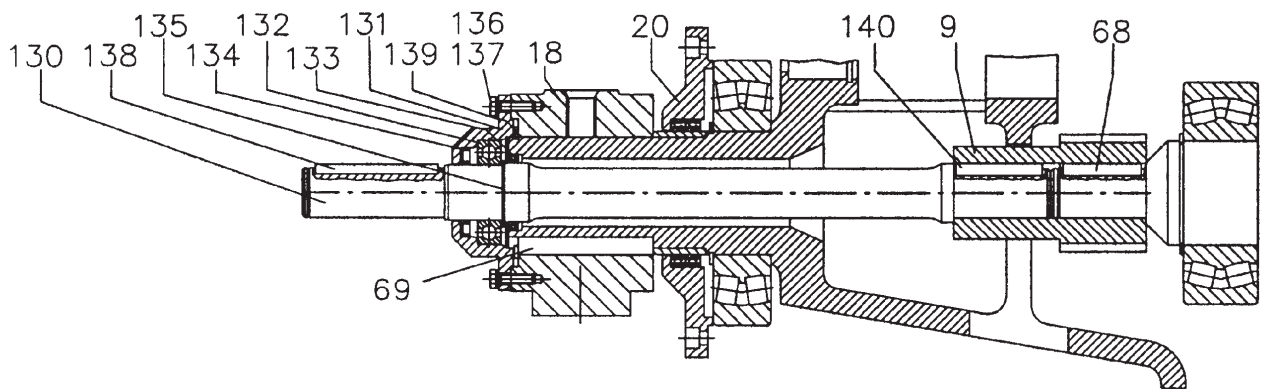



Motorized Pulleys Mounting Orientations



Head Pulley Drive (Horizontal Mounting Surface)

Model 630H at 24" diameter and 30 HP drives elevated sinter discharge conveyor at major US steel mill. Note that mounting brackets are bolted onto upper surface of a sliding horizontal mounting plate. The sliding plate serves as a "mechanical take-up", enabling plant personnel to maintain appropriate slack side belt tension as belt stretches throughout its service life.

Technical Precaution: It is essential that Motorized Pulleys be mounted as shown on pages 86-87 of this catalog. Correct installation will ensure that Motorized Pulley will have adequate oil circulation and avoid stress-related radial load problems.



Head Pulley Drive (Vertical Mounting Surface)

Model 400H at 16" diameter and 20 HP drives inclined bottom ash discharge conveyor of portable recycling plant at US waste-to-energy power plant. Note that mounting brackets are bolted onto vertical surface of conveyor frame.



Boom Drive Pulley (Below Frame)

Model 800H at 32" diameter and 100 HP drives articulating boom belt to carry taconite pellets on bucket wheel reclaimer at major US rail-to-ship transfer terminal. Note that Motorized Pulley is mounted to the bottom of the horizontal steel structure. Ordinarily, it is unacceptable to mount a Rulmeca Motorized Pulley "upside down", as explained on page 87. However, this Motorized Pulley was modified by Rulmeca prior to installation to accommodate the special mounting orientation.

Technical Precaution: It is essential that Motorized Pulleys be mounted as shown on pages 86-87 of this catalog. Correct installation will ensure that Motorized Pulley will have adequate oil circulation and avoid stress-related radial load problems.



Center Pulley Drive Nest

Mobile crushing and screening plant features three Model 320M at 13" diameter and 5.5 HP in congested center drive location. Note flexible conduit connecting terminal boxes on end of each pulley shaft with external junction boxes and manual disconnect switches.




Motorized Pulleys Hopper Feeder Drives



Limestone Quarry

Two model 400M (16" diameter) 5.5 HP Motorized Pulleys were installed to automatically "choke feed" two tertiary gyratory crushers, working in combination with variable frequency drives (VFD) and optical sensors. Each pulley drives a 36" wide belt at a maximum speed of 120 FPM to transfer 4" minus product at 425 TPH.

Technical Precaution: When driving Motorized Pulley with VFD on 460 volt 3 phase 60 Hz power supply, always restrict frequencies to allowable frequency spectrum of 12-66 Hz to avoid torque loss and heat build-up. Filter VFD output if VFD is more than 30' from Motorized Pulley to avoid resonance-induced voltage spikes.

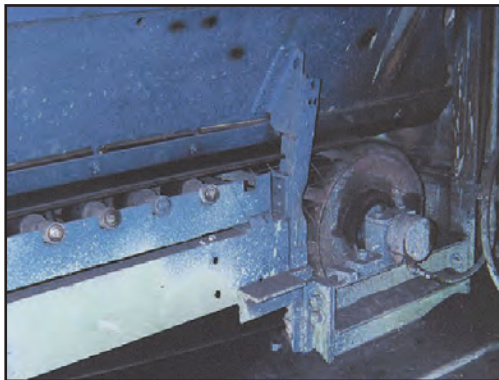

Foundry for Railroad Component Castings

This model 400M (16" diameter) 10 HP Motorized Pulley transfers recycled foundry sand to mold area at 150 TPH. Conveyor makes 30 start/stops per hour. Ambient environment is hot (>104° F) and contains a high percentage of airborne abrasive particulate. Photo taken after 13 years of service.

Technical Precaution: When installing a Motorized Pulley in a hot environment (>104° F), specify optional Class H motor windings and synthetic oil. Contact Rulmeca if ambient temperature will exceed 120° F.



Taconite Ore Processing Plant

Two limestone feeder belt drives beneath storage silo were converted from 20-year-old DC motors to Motorized Pulleys AC-powered on 460v/3ph/60Hz supply. A VFD drives each model 500M (20" diameter) 5.5 HP Motorized Pulley to a maximum of 120 FPM. Conversion enabled plant operator to eliminate exposed motors and gearboxes and replace SCRs, relays, and timer banks with VFDs in control panel.

Technical Precaution: When driving a Motorized Pulley with a VFD on a 460 volt 3 phase 60 Hz power supply, restrict frequencies to a frequency spectrum of 12-66 Hz to avoid torque loss and heat build-up. Filter VFD output if VFD is more than 30' from Motorized Pulley to avoid resonance-induced voltage spikes.



Cement Plant

Photo shows one of five hopper feeder conveyors installed beneath aggregate mixing bins. Each 30" wide feeder belt is driven by an 8.5" diameter 4 HP Model 220M Motorized Pulley at 200 FPM. Collector belt is driven by a 15.75" diameter 10 HP Model 400M Motorized Pulley at 250 FPM.

Technical Precaution: When designing hopper feeder drives always include material shear force in power calculations. Rulmeca Corporation conveyor design software is available.



Motorized Pulleys Dual Drives and Load Sharing



Ore Terminal Bucket Wheel Reclaimer Belt Tension Reduction

Five bucket wheel reclaimers at major US rail-to ship taconite ore terminals were retrofitted with dual Motorized Pulleys to drive the machine's tail conveyor. Depending on power requirements, dual 120 HP, dual 100 HP, or dual 180 HP were installed. The "nested dual" was installed on return side using a "serpentine" belt wrap configuration. Total wrap angle exceeded 420°. Calculations showed that the additional 240° of belt wrap reduced slack side tension to prevent belt slippage and/or sag, T2, by 29 percent. This drop in T2 resulted in a reduction of 13% in T1, total belt tension. The retrofits resulted in a significant extension to service life of belt, pulleys, and pillow blocks.



Limestone Quarry Belt Tension Reduction

High tension in the top side carrying strand can be reduced in inclined conveyors by using a dual drive configuration. This US limestone producer reduced maximum belt tension at the discharge (head) pulley from 27,000 lbs. to 17,000 lbs. after modifying his conveyor drive design from a single 300 HP drive with a 384 fpm belt speed to a dual drive with a 600 fpm belt speed. This will yield a significantly longer belt life because of reduced belt stress. Each of the two drives was a 150 HP, model 800H, 31.5" diameter Motorized Pulley controlled by load-sharing VFDs.

Technical Precaution: Filter VFD output if VFD is more than 30' from Motorized Pulley to avoid resonance-induced voltage spikes.



Trona Mine Radial Stacker Elimination of Belt Slippage

Adding belt wrap when necessary is simple through the addition of a Rulmeca Motorized Pulley. Belt wrap was increased from 180° to 360° at this western US trona mine by the adding a 60 HP, model 630H, 24.8" diameter Motorized Pulley to the head of this 40-year-old radial stacker. It eliminated slippage of the 100 HP tail drive during rainy conditions. The 2,400 lb. Motorized Pulley replaced a 3,200 lb. idler pulley, requiring no structural modifications to the stacker truss.



Ore Terminal Dock Conveyor Elimination of Belt Slippage

Since temperatures can reach -20° F at this iron ore terminal, night time frost can build up beneath the carrying strand of belt causing slippage at start-up. The installation of two 180 HP Model 800H Motorized Pulleys at the head and tail positions, with electronic load-sharing, eliminated the problem on this reversing shuttle belt, which feeds the 60 ship loader surge bins. Both drives are energized simultaneously to turn either clockwise or counterclockwise to carry material westward or eastward, respectively.



Motorized Pulleys Bucket Wheel Conveyor Drives



MX Bucket Wheel Reclaimer - Wisconsin

Originally built in 1964, this bucket wheel reclaimer was retrofitted with three Rulmeca Motorized Pulleys in 2004, one on the boom conveyor and two on the tail conveyor, to continue to yield a reclaiming rate of 3,000 to 4,000 TPH. Since that time, the drives have worked reliably with only one overhaul after ten years of service. The photo shows one of three bucket wheel reclaimers which were upgraded to Rulmeca Motorized Pulleys at the terminal. Electrical power is provided to the drives by a diesel generator mounted on the reclaimer chassis.

Technical Precaution: When using labyrinth seals periodically purge grease through seals to prevent grease-born grit from attacking shaft oil seals.



FAM Bucket Wheel Excavator - South Carolina

FAM designed and built this 1,000 TPH excavator for an international cement producer in 2002. The excavator is still in active service. The 50' long boom conveyor and 100' long discharge conveyor each use a Model 800H Motorized Pulley at 31.5" diameter and 100 HP to drive a 54" wide belt at 600 FPM. FAM has been using Motorized Pulleys as excavator belt drives for more than 30 years.

Technical Precaution: When using a Motorized Pulley on an articulating conveyor that inclines up and down use a brake to prevent material from rolling "down-hill" when conveyor stops. External brake shaft option is available from Rulmeca. See pages 68 and 73 for drawings of external brake shaft.



MX Bucket Wheel Reclaimer - Wisconsin Summer

This is one of three bucket wheel reclaimers outfitted with Rulmeca Motorized Pulleys in 2004. The machine feeds taconite ore from terminal stockpiles to lake ships at a rate of 3,000 to 4,000 TPH.



MX Bucket Wheel Reclaimer - Minnesota Winter

Built in 1976, this bucket wheel reclaimer is one of two machines retrofitted with Rulmeca Motorized Pulleys in 2015 because aging conveyor drives could only deliver a reclaim rate of 1,500 TPH. This drop in reclaim rate directly increased vessel load times. In addition, unscheduled stoppages of the reclaimers' conveyors caused significant delays in ship turnaround time. After installing one Rulmeca Motorized Pulley on the boom and two on the discharge conveyor, each at 180 HP, the machine immediately delivered a reclaim rate exceeding 4,000 TPH.

Technical Precaution: When using Motorized Pulleys in non-continuous operation in freezing conditions, order an optional Rulmeca internal heater or run "trickle voltage" through motor to facilitate start-up. See page 100 for circuit diagram. If neither of these options is possible, use lower viscosity oil in wintertime.




Motorized Pulleys Mobile Crushing/Screening Plant Conveyor Drives



“Double-Double” Cross Belt Drives

Mobile crushing/screening plants must adhere to size and weight restrictions to be legally transported on US highways. The drive nest on this “double screen plant” features four model 320M (13” diameter) Motorized Pulleys at 5.5 HP, which capture two cuts from the left screen and two cuts from the right screen. Since their weight is 30% less than equivalent exposed drives, they help limit the total weight of the plant. Drive, skirt seal, and belt cleaner maintenance is simplified through the use of Motorized Pulleys because motors and gearboxes are enclosed within each pulley and metal safety guarding is unnecessary.

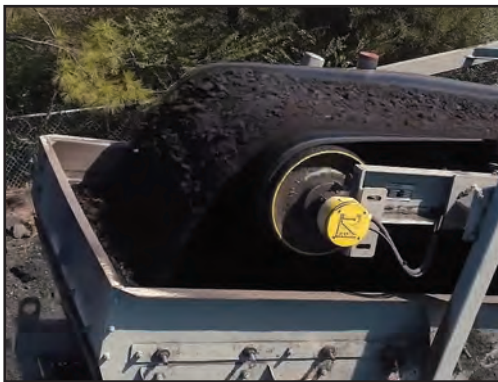

Screen Feed Drive

This plant incorporates a 20 HP (16” diameter) model 400M as its screen feed conveyor drive. Its compact size and light weight enable the plant operator to easily move the plant from site to site on US highways. Centering the belt drive weight between the conveyor’s two support beams avoids an overhung load and permits a lighter less costly support structure. Adhering to the 14’ height, 12’ width, 100’ length, and 150,000 lbs limitations enable plant operators to minimize the cost of redeploying plants throughout the US.



Cross Belt Drive with “Beater Bars”

This cross conveyor belt not only incorporates a model 220M (8.5” diameter) at 4 HP as its drive, it also includes optional steel “beater bars” onto the surface of the pulley. These bars are an ideal solution to problem of handling sticky RAP (recycled asphalt product) when a HSI (horizontal shaft impact crusher) plant is used in road resurfacing projects.



Cross Belt Drive with Internal Backstop and Electronic Sensors

This cross conveyor belt is steeply inclined (rather than horizontal) to increase the pile size adjacent to the mobile crushing/screening plant. Therefore, it incorporates a mechanical backstop (indicated by the arrowhead) to prevent material roll-back in the event of a conveyor stoppage when fully loaded. Note also that the compactness of the model 220H (8.5” diameter) Motorized Pulley streamlines the mechanical take-up and the optical sensors added to the drive system.

Technical Precaution: It is essential that the identity of each of the three phases of the power supply be determined before attaching power supply wires to the pulley to prevent the motor from driving against the backstop. The identity of each of the three phases of the motor is clearly labeled.



Motorized Pulleys Conveyor Tail Drives



Mobile Crushing/Screening Plant in Rock Quarry

The tail-mounted model 400M (16" diameter) 15 HP Motorized Pulley drives the 36" wide screen feed belt in tandem with an identical 15 HP head-mounted drive, at 384 fpm. As shown in the photo, the tail drive is mounted in a "Sliding Pedestal" mechanical belt take-up to tighten the conveyor belt as it stretches.

Technical Precaution: When mounting a Motorized Pulley in a screw take-up always make sure that pulley centerline is perpendicular to belt centerline to avoid overstressing internal bearings. Also, insure that the power cable festoon is long enough to accommodate the full travel of the pulley in the take-up.



Tunnel Reclaim Conveyor at Cement Plant

This model 630H (24" diameter) Motorized Pulley at 50 HP is mounted in the tail of a 550' long inclined reclaim conveyor and works in conjunction with an identical model 630H in the head position, 138' above the tunnel. The conveyor is fed by six vibrating feeders and moves limestone to the transfer tower via a concave vertical curve. When the concave conveyor was started empty with the original 75 HP head pulley drive, the belt would bounce up 4' and damage the belt and feeder support structure. The installation of a head-and-tail drive eliminated belt bounce completely. Due to a high water table, the tunnel flooded three times during the first 12 years of operation, with no deleterious effect on the Motorized Pulley.



Bucket Wheel Excavator at Cement Plant

This crawler-mounted bucket wheel reclaimer was installed in 2002 to excavate marl from a pit adjacent to the producer's cement plant. It uses a tail-mounted model 800H (32" diameter) 100 HP Motorized Pulley to drive the 54" wide boom conveyor belt at 600 fpm. The externally-mounted brake prevents material from "rolling backwards" when the boom conveyor is deenergized. Since the conveyor can articulate upwards and downwards to a 16° maximum inclination, it is impossible to use a mechanical backstop.

See pages 68 and 73 for drawings of external brake shaft option.




Mobile Crushing/Screening Plant in Gravel Pit

Similar to the plant shown above, this portable plant features a diesel generator, gyratory crusher, vibrating screen, and five conveyors, which are screen feed, recirculating belt, two cross belts, and one under screen belt. The photo shows a model 400M (16" diameter) 15 HP Motorized Pulley, which drives a 36" wide screen feed belt at 384 fpm in tandem with an identical 15 HP head-mounted drive. Note that: (1.) the drive pulley is mounted in a "Sliding Pedestal" mechanical belt take-up and (2.) the power cord has a festoon long enough to accommodate pulley movement as the belt stretches.




Motorized Pulleys Labyrinth Shaft Seals

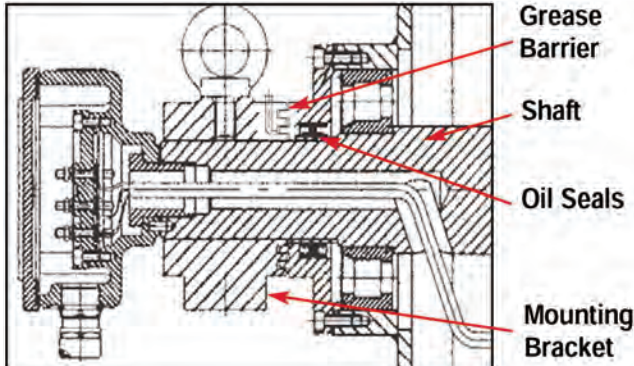

Purpose of Labyrinth Seals:

Rulmeca labyrinth seals provide an extra barrier of protection for shaft oil seals. They protect the IP67 oil seals against contamination by forming a toruous grease-filled path for corrosive and abrasive material.

Technical Precaution: Note that grease-packed labyrinths extend shaft oil seal life compared to standard seals, as long as contaminants are purged from the labyrinths. Shaft oil seal life will be compromised if contaminants are permitted to attack oil seals.

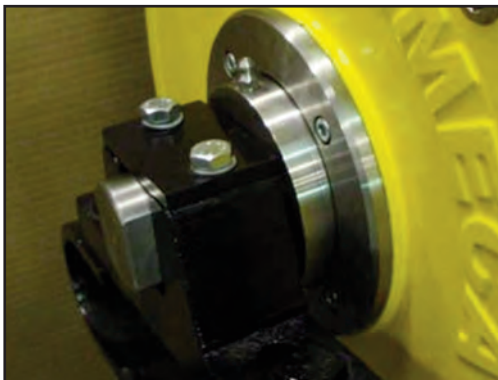


Small Pulley Labyrinth Seal:

Photo shows grease nipple and exterior of labyrinth seal option for Motorized Pulley models 220M, 220H, 320M, 320H, 400M, and 400H. Labyrinth seal consists of one lip and groove formed between stationary labyrinth seal plate and rotating bearing cover. Grease may be purged manually, using grease nipple, or automatically, using Labyrinth Seal Grease Canister.



Large Pulley Labyrinth Seal:

Photo shows grease nipple and exterior of labyrinth seal option for Motorized Pulley models 500H, 630M, 630H, 800M, and 800H. As shown below, labyrinth seal consists of two lips and grooves formed between stationary mounting bracket and rotating bearing cover. Grease may be purged manually, using grease nipple, or automatically, using Labyrinth Seal Grease Canister.

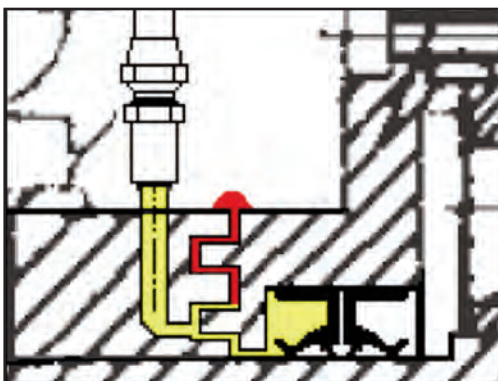


Contamination Prevention:

Diagram shows positions of lips and grooves for Motorized Pulley model 500H and larger. These grooves must be completely filled with grease and purged to prevent contamination from attacking oil seals on pulley shaft.

Technical Precaution: It is essential that contamination be prevented from migrating through the labyrinths into the oil seal chamber. Grease canisters provide a continuous flow of grease outward by maintaining a positive pressure within the canisters. Canisters must be replaced when grease is depleted. Canister labels are designed to record dates.




Motorized Pulley Options Mechanical Backstops and Brakes

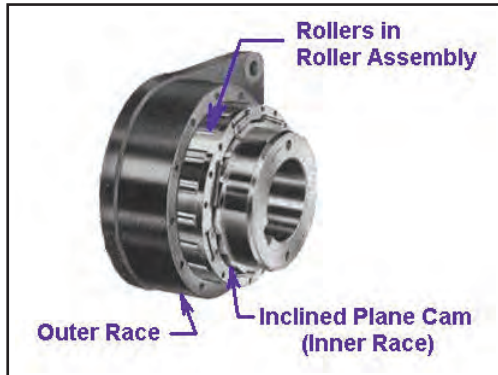

Mechanical Backstop Exploded View

Rulmecca's mechanical backstops are built into the Motorized Pulley to limit pulley rotation to one direction (either clockwise or counterclockwise.) The backstop's keyed inner race is fixed to the motor rotor and the outer race is bolted to the motor stator frame. This yields two advantages: (1.) the backstop has all of the mechanical advantage, which can be as high as 100:1, and (2.) it is protected in a hermetically sealed environment.


Technical Precaution: The identity of each of the three phases of power should be determined before attaching power supply wires to the pulley to prevent the motor from driving against the backstop. The identity of each of the three phases of the motor is clearly labeled.

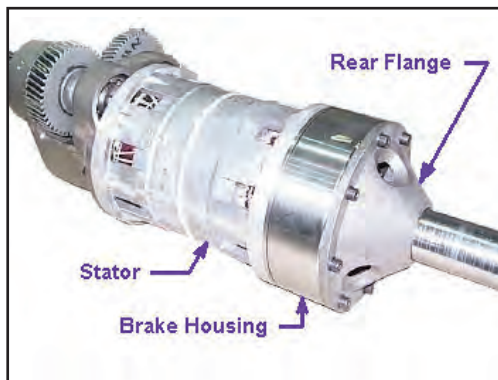

Rulmecca Internal Brake/Motor/Gearbox Assembly

Spring-loaded electromagnetic brakes are designed to release when power is applied to the brake coil. This is a "fail safe" feature. They clamp shut when brake power is removed (either during normal operation or during an emergency loss power.) Photo shows 320H model. Note that this option requires additional internal space and larger minimum Roller Length.

Technical Precaution: Control circuit for motor and brake must be designed to stop pulley motor before brake clamps shut and start pulley motor after brake is released. Brakes are DC-powered and supplied with AC to DC rectifiers to be mounted in a remote panel (by others). Control circuit must be designed to kill motor power in the event of loss of brake power. If this provision is not made, motor can possibly "power through" clamped brake.

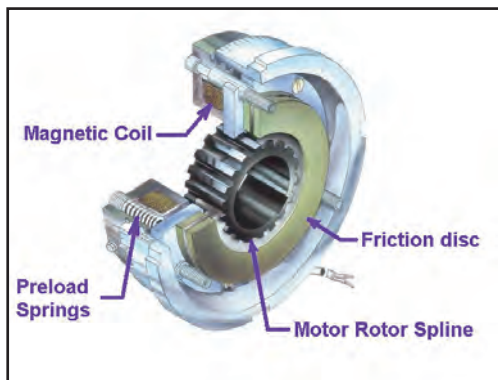

Rulmecca Internal Brake

Rulmecca internal brake is designed to function primarily as a belt holding device for reversing and/or articulating conveyors. The brake is not intended to be a conveyor stopping device. The brake's keyed spline is fixed to the motor rotor and the brake's housing is bolted to the motor stator frame. This yields two advantages: (1.) the brake has all of the mechanical advantage, which can be as high as 100:1, and (2.) it is protected in a hermetically sealed environment.

Technical Precaution: Control circuit must be designed so that motor and brake never work against each other. Brake should never be clamped shut when motor is on except for "emergency stop." Motor should never be powered on (including "jog" command) when the brake is clamped shut.



Example of External Brake (South Carolina—USA)

Available in models 500H and larger, Rulmecca external brake shaft option extends motor rotor shaft through hole in non-rotating pulley shaft for attachment of external brake (by others). This hydraulically-actuated double-shoe brake (protective cover removed for photograph) prevents conveyor roll back when fully loaded belt is stopped.

The external brake option provides one of the two key advantages available with the internal brake option. Brake has all of the mechanical advantage of the drive (as high as 100:1 ratio) because it is fixed directly to the motor rotor shaft. It is, however, exposed to the environment.

See pages 68 and 73 for drawings of external brake shaft option.



Motorized Pulley 630M & 630H, Ø 24.80 in. (630 mm)

Our 24.80" diameter Motorized Pulley range offers two different performance levels for BULK applications:

- M for Medium duty
- H for Heavy duty

It is important to note the product differences and choose the appropriate pulley based on estimated belt tension (radial load.) See page 82. The actual radial load must be less than the maximum allowable radial load shown in this catalog.

Be aware of increased belt tensions required to drive multi-ply thick heavy belts and/or larger belt widths.

If the 24.80" diameter model is not strong enough to resist estimated belt tension, then select 31.50" diameter model.

M for Medium duty

A solid 2-stage gearbox enables the 630M to handle irregular loadings in harsh operating conditions. 630M uses motor and gearbox from 500H. Note that 630M outer dimensions do not match 630H

H for Heavy duty

630H has stronger internal components with gearbox, shaft, and bearings designed for tough, irregular, and extreme operating conditions.

STANDARD SPECIFICATION of Motorized Pulley

- Crowned mild steel 24.80" diameter steel shell painted yellow at a minimum thickness of 2.4 mils
- Bolted powder coated cast iron bearing housings and covers, all painted yellow at a minimum thickness of 2.4 mils
- Mild steel shafts
- Shaft sealing system - degree of protection IP66/67 (EN60034-5.) See page 37.
- Cast iron terminal box for painted yellow at min.thickness of 2.4 mils
- 3-phase induction motors with thermal protector
- Voltage: All common voltages available. Please specify.
- Motor winding insulation Class F
- Dynamically balanced rotor
- Two oil plugs each fitted with a magnet to filter the oil
- Yellow painted mounting brackets (AL & ALO) included with pulley
- Oil change recommended every 10,000 operational hours
- Minimum RL. Refer to pages 63-64
- Maximum RL - Please inquire
- Non standard RL's available
- To be used in horizontal positions ± 5 degree only

Please note:

- **Noise-sensitive Areas:** High speed 2-pole motors can cause higher noise levels and are not recommended for noise-sensitive areas
- **Technical Precautions for Design, Installation, and Maintenance:** pages 80-90
- **Environmental Considerations:** pages 78-79
- **Optional Extras:** page 61
- **Electrical Connection Diagrams:** pages 94-101

SEMI-RUST-FREE options

TS11

- Polyurethane painted mild steel shell at minimum thickness of 4.7 mil
- Polyurethane painted cast iron end housings at min. thickness of 4.7 mils
- Stainless steel bearing covers with labyrinth grooves – AISI 304 range
- Nitrided shaft sleeves
- Zinc-plated oil plugs - each with magnet
- Zinc-plated exterior bolts
- Shaft sealing system – degree of protection P66/67 (EN60034-5) See pg 37.
- Polyurethane painted terminal box at minimum thickness of 4.7 mils
- Nickel plated mounting brackets with labyrinth grooves

TS12

- As TS11, but without regreasable seals.
- Covers - standard

Please note:

- FDA & USDA food grade recognized oil and grease are not included in TS11 & TS12, but available on request.

Please specify required TS number when ordering Stainless Steel options.



OPTIONAL EXTRAS

Motorized Pulley 630M & 630H

Specification	Availability
Semi-rust-free option TS11 with regreasable labyrinth seals	x
Semi-rust-free option TS12 with standard seals	x
Regreasable labyrinth seals	x
Dust explosion proof Motorized Pulleys - ATEX 95 - Zone 22 - for applications handling of dusty grain etc. According to European Directive 94/9/EC.	x
Standard black rubber lagging (See pages 82-83.)	
3/8" full smooth lagging - Hardness 60 ±5 Shore A	o
3/8" full diamond lagging - Hardness 60 ±5 Shore A	o
3/8" partial smooth lagging - Hardness 60 ±5 Shore A	o
White smooth rubber lagging (FDA listed) - Oil, fat & grease resistant	o
Special lagging - e.g. hot vulcanized, partial, and ceramic (See page 80.)	o
External brake shaft (for mechanical brake by others)	x
Mechanical backstop	Min. RL = 29.53" for 630M Min. RL = 37.40" for 630H
Insulation class F with standard oil: (allowable ambient temperature: -13°F/+104°F)	Std.
Insulation class H with synthetic oil: (allowable ambient temperature: -13°F/+120°F)	x
Parallel shell	x
Thermal protection switch	Std
Temperature monitoring device (PT100 RTD or PTC)	x
Thermal protection switch and temperature monitoring device (PT100 RTD or PTC)	x
Voltage: Single voltage (460) stator (Y winding) wired for 460v/3ph/60 Hz at terminal box	Std.
IP66/67 Standard yellow powder coated cast iron terminal box	Std.
Special voltage motors	x
Special zinc-rich epoxy paint	x
CSA approved motors	x

x = Optional extras




o = An option with certain limitations. Please refer to Technical precautions pages 80-90.

Std. = Fitted as standard




Motorized Pulley 630M & 630H, Ø 24.80 in. (630 mm)

Motorized Pulley with terminal box

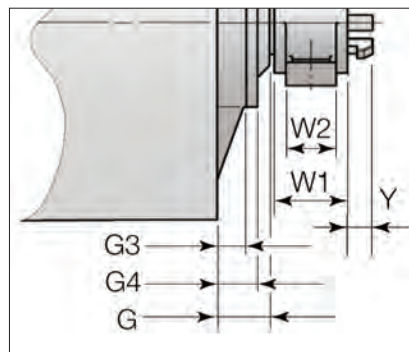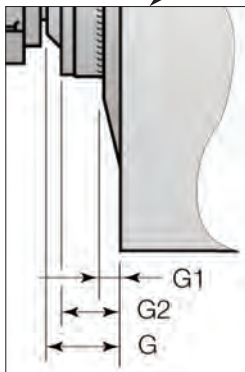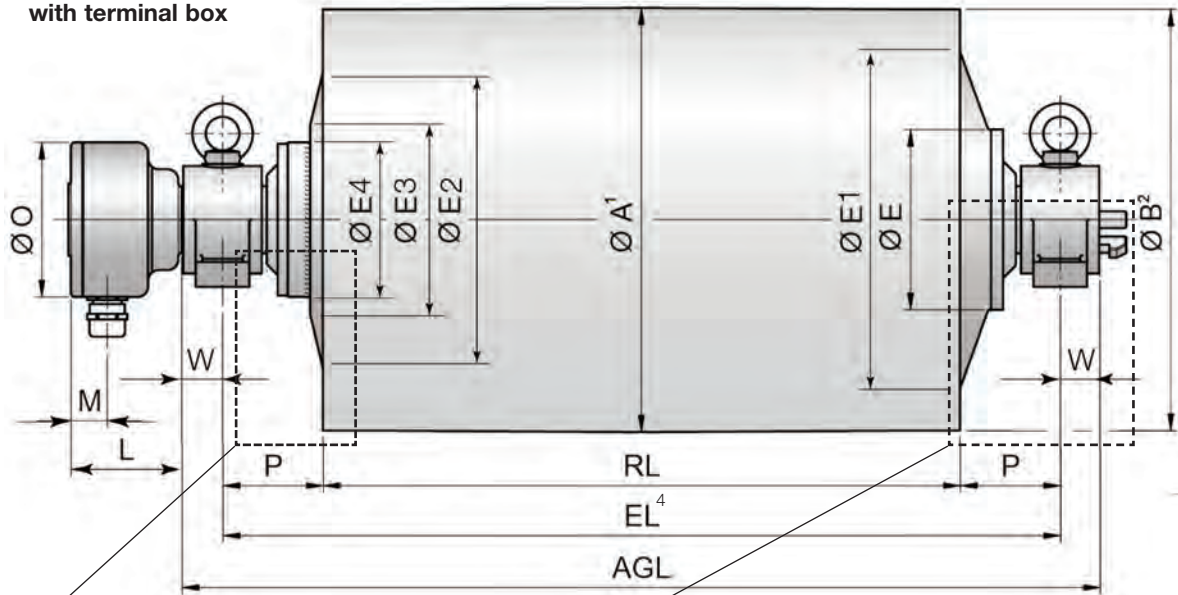

Optional external brake shaft

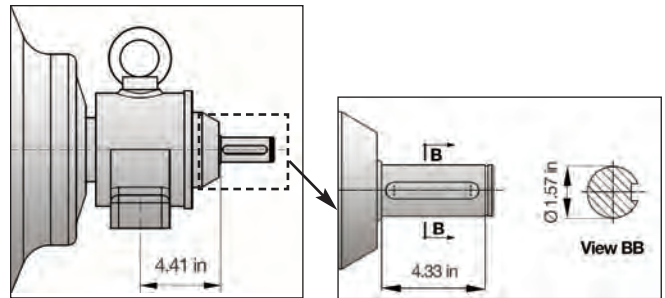


Model	Dimensions ⁵																		
	A	B	D ³	E	E1	E2	E3	E4	G	G1	G2	G3	G4	L	M	O	P	Y	
	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in
630M	24.80	24.65	2.56	7.56	21.85	20.91	10.79	7.68	3.74	0.87	3.35	1.67	3.35	3.94	1.42	6.14	5.91	2.0	
630M (30 HP)	24.80	24.65	3.54	7.56	21.85	20.91	10.79	7.68	3.74	0.87	3.35	1.67	3.35	6.50	2.13	9.06	5.91	2.0	
630H	24.80	24.65	3.54	10.55	17.56	15.79	12.48	8.94	3.46	1.00	2.05	1.97	2.64	6.50	2.13	9.06	5.91	2.0	

- 1 A dimension is outer diameter of unlagged pulley shell at pulley centerline.
- 2 B dimension is outer diameter of unlagged pulley shell at each end of shell.
- 3 D dimension is shaft diameter.
- 4 EL = mounting centers.
- 5 Dimensions E, E1, E2, E3, E4, G, and G3 may vary +/- 0.25 in because they do not all refer to machined parts. G dimension does not apply to lab seals (see pg 64).



Motorized Pulley 630M & 630H, Ø 24.80 in. (630 mm) 60 Hz

Mounting Brackets

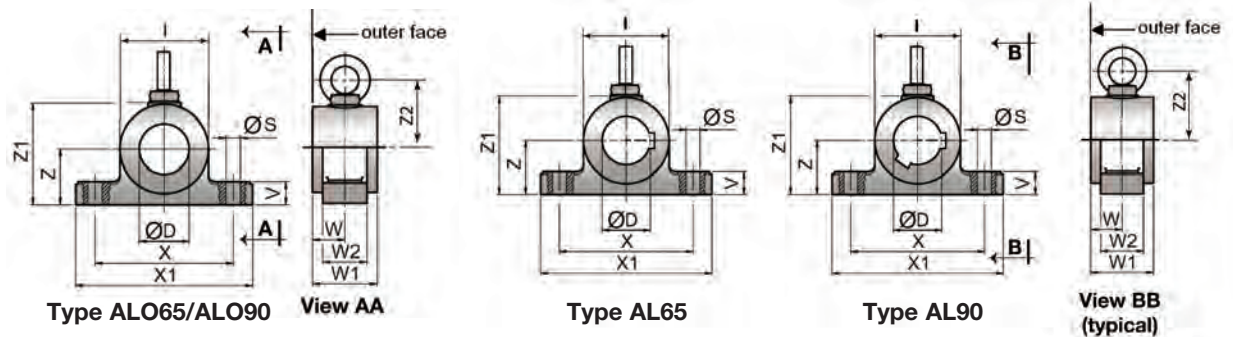

Motorized Pulleys	Material	Bracket Type	Dimensions													Weight lbs
			D	I	S	V	W	W1	W3	X	X1	Z	Z1	Z2		
Model			in	in	in	in	in	in	in	in	in	in	in	in	in	in
620M	Cast iron	AL65 / ALO65	2.56	4.53	0.91	1.34	1.85	3.54	2.36	7.09	9.45	3.15	5.55	3.65	17.64	
630M (30 HP), 630H	Cast steel	AL90 / ALO90	3.54	6.30	1.02	1.65	2.40	4.61	3.15	9.84	12.60	3.94	7.20	5.14	41.89	

Motor			Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Min. RL in	RL Dimension inches (RL > 78.74" available on request)										Type of Bracket																										
Power HP	No. of Poles	No. Gear Stages							Weight in lbs ⁵																																				
									29.53	31.50	33.46	35.43	37.40	39.37	41.34	43.31	45.28	longer than 45.28																											
7.5	8	2	630M	150	157	1473	10,300	29.53	907	929	951	972	994	1019	1041	1064	1086	See Note ⁴	AL65 & ALO65																										
				192	200	1155																																							
				240	267	866																																							
10	6	2	630M	300	351	659														10,300	29.53	927	949	970	992	1014	1039	1061	1084	1106	See Note ⁴	AL65 & ALO65													
				384	390	591																																							
				480	487	475																																							
15	6	2	630M	600	594	388																											10,300	29.53	960	982	1006	1027	1049	1074	1096	1119	1141	See Note ⁴	AL65 & ALO65
				768	782	296																																							
				2009	1574	1181																																							
20	4	2	630M	240	267	1733																																							
				300	351	1318																																							
				384	401	1574																																							
25	4	2	630M	480	526	1199	10,300	29.53	1006	1028	1052	1074	1096	1121	1142	1165	1187	See Note ⁴	AL65 & ALO65																										
				600	586	1327																																							
				768	730	1064																																							
30	2	2	630M	384	400	1959														10,300	29.53	1006	1028	1052	1074	1096	1121	1142	1165	1187	See Note ⁴	AL65 & ALO65													
				480	526	1478																																							
				600	586	1327																																							
30	2	2	630M	768	730	1064																											10,300	29.53	1006	1028	1052	1074	1096	1121	1142	1165	1187	See Note ⁴	AL65 & ALO65
				600	627	1473																																							
				768	800	1155																																							

- 1 Use "nominal belt speed" to specify pulley. "Actual belt speed" is presented (for pulley lagged with 3/8" thick rubber) to assist with process design calculations. See Technical Precautions page 81. Note that "actual belt speed" decreases when lagging is not used due to decreased pulley diameter.
- 2 Belt pull value allows for gearbox loss.
- 3 Pulley must not be subjected to radial load exceeding "Maximum radial load" defined above. See "Belt Tension" section in Technical Precautions, page 82.
- 4 Additional Motorized Pulley weight: Model 630M: 45.28" ≤ RL ≤ 78.74" Wt = 11.2 lbs/in; Model 630H: 51.18" ≤ RL ≤ 78.74" Wt = 15.8 lbs/in.
- 5 All weights shown above are for pulleys "fully lagged" with 3/8" thick rubber. For model 630H "partially lagged" pulleys add 4% to 7% to the weights shown above. See pages 45, 82, and 83 for "partial lagging." To calculate unlagged pulley weight subtract 1.2 lbs/in of Roller Length from above.

Rulmeca offers return, snub, and idler pulleys with dimensions to match our Motorized Pulleys on request.




Motorized Pulley 630M & 630H, Ø 24.80 in. (630 mm) 60 Hz

Motor		No. of Poles	No. Gear Stages	Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Min. RL in	RL Dimension inches (RL > 78.74" available on request) Weight in lbs ⁵								Type of Bracket
Power HP	37.40									39.37	41.34	43.31	45.28	47.24	49.21	51.18	longer than 51.18	
30	8	2	630H	240 300 384 480 600 768	247 314 408 492 639 783	3745 2946 2268 1879 1449 1182	16,600	37.40	1819	1850	1879	1910	1939	1963	1995	2025	See Note ⁴	AL90 & ALO90
40	8	2	630H	240 300 384 480 600 768	247 314 408 492 639 783	5107 4018 3093 2563 1975 1611	22,000	37.40	1863	1894	1923	1955	1983	2007	2039	2069		
50	6	2	630H	300 384 480 600 768	330 418 544 656 851	4723 3717 2861 2370 1828	22,000	37.40	1863	1894	1923	1955	1983	2007	2039	2069		
61	4	2	630H	480 600 768 960	493 627 815 984	3830 3013 2321 1922	19,900	37.40	1907	1939	1967	1999	2027	2051	2083	2114		
75	4	2	630H	600 768 960	627 815 984	3683 2836 2349	19,900	37.40	1907	1919	1967	1999	2027	2051	2083	2114		


- 1 Use "nominal belt speed" to specify pulley. "Actual belt speed" is presented (for pulley lagged with 3/8" thick rubber) to assist with process design calculations. See Technical Precautions page 81. Note that "actual belt speed" decreases when lagging is not used due to decreased pulley diameter.
- 2 Belt pull value allows for gearbox loss.
- 3 Pulley must not be subjected to radial load exceeding "Maximum radial load" defined above. See "Belt Tension" section in Technical Precautions, page 82.
- 4 Additional Motorized Pulley: Model 630M: 45.28" ≤ RL ≤ 78.74" Wt = 11.2 lbs/in; Model 630H: 51.18" ≤ RL ≤ 78.74" Wt = 15.8 lbs/in.
- 5 All weights shown above are for pulleys "fully lagged" with 3/8" thick rubber. For model 630H "partially lagged" pulleys add 4% to 7% to the weights shown above. See pages 45, 82, and 83 for "partial lagging." To calculate unlagged pulley weight subtract 1.2 lbs/in of Roller Length from above.

Rulmeca offers return, snub, and idler pulleys with dimensions to match our Motorized Pulleys on request.


Terminal Box
(valid for 630M)

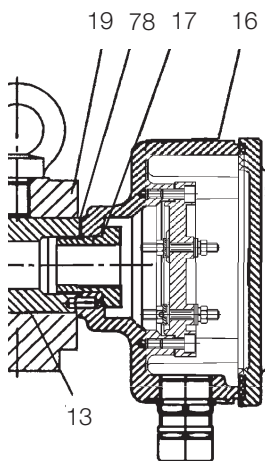

Labyrinth Seal Option

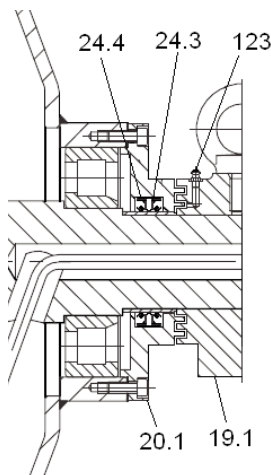

External Brake Shaft Option

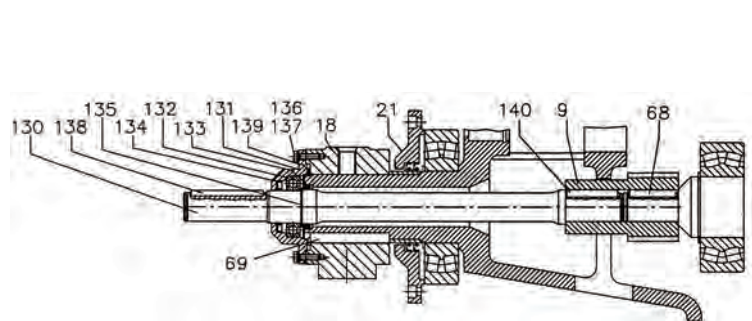




Motorized Pulley 630M & 630H, Ø 24.80 in. (630 mm)

Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
1	Shell	24.4	Shaft oil seal inner (lab option)	76	Gasket
4	End housing with geared rim	26	Bearing	77	Gasket
6	Distance washer (630H)	27	Bearing	78	Gasket
8	Geared rim	30	Bearing	79	Holding plate
9	Rotor pinion	31	Bearing	85	Motor flange for backstop/brake
10	Input wheel	32	Retaining ring	90	Backstop
11	Output pinion	33	Retaining ring	90.1	Backstop housing
12	Gear box including rear shaft	34	Retaining ring	90.2	Backstop cover
13	Front shaft	35	Retaining ring	93	Retaining ring
14	Rear shaft	37	Hexagon socket screw	94	Hexagon head screw
15	Stator complete	38	Hexagon socket screw	99	Spring washer
15.1	Rotor	42	Hexagon head screw	101	Key
16	Terminal box complete	44	Hexagon head screw	123	Grease nipple
17	Nipple (630M only)	45	Hexagon head screw	130	Brake shaft
18	Mounting bracket rear side	47	Hexagon head screw	131	Mounting bracket bearing cover
18.1	Mtg bracket rear side (lab option)	50	Washer	132	Roller bearing
19	Mounting bracket front side	51	Gasket	133	Brake shaft seal
19.1	Mtg bracket front side (lab option)	52	Magnetic oil plug	134	Brake shaft seal
20	Cover - front side	57	Washer	135	Retaining ring
20.1	Cover with labyrinth groove	58	Spring washer	136	Bolts - bearing cover
21	Cover - rear side	68	Key	137	Spring lock washer
21.1	Cover with labyrinth groove	69	Gib key	138	Key
23	Rear flange	70	Waved spring washer	139	Retaining ring
24.1	Shaft oil seal outer	72	Grooved pin	140	Key
24.2	Shaft oil seal inner	73	Set screw		
24.3	Shaft oil seal outer (lab option)	75	Gasket		

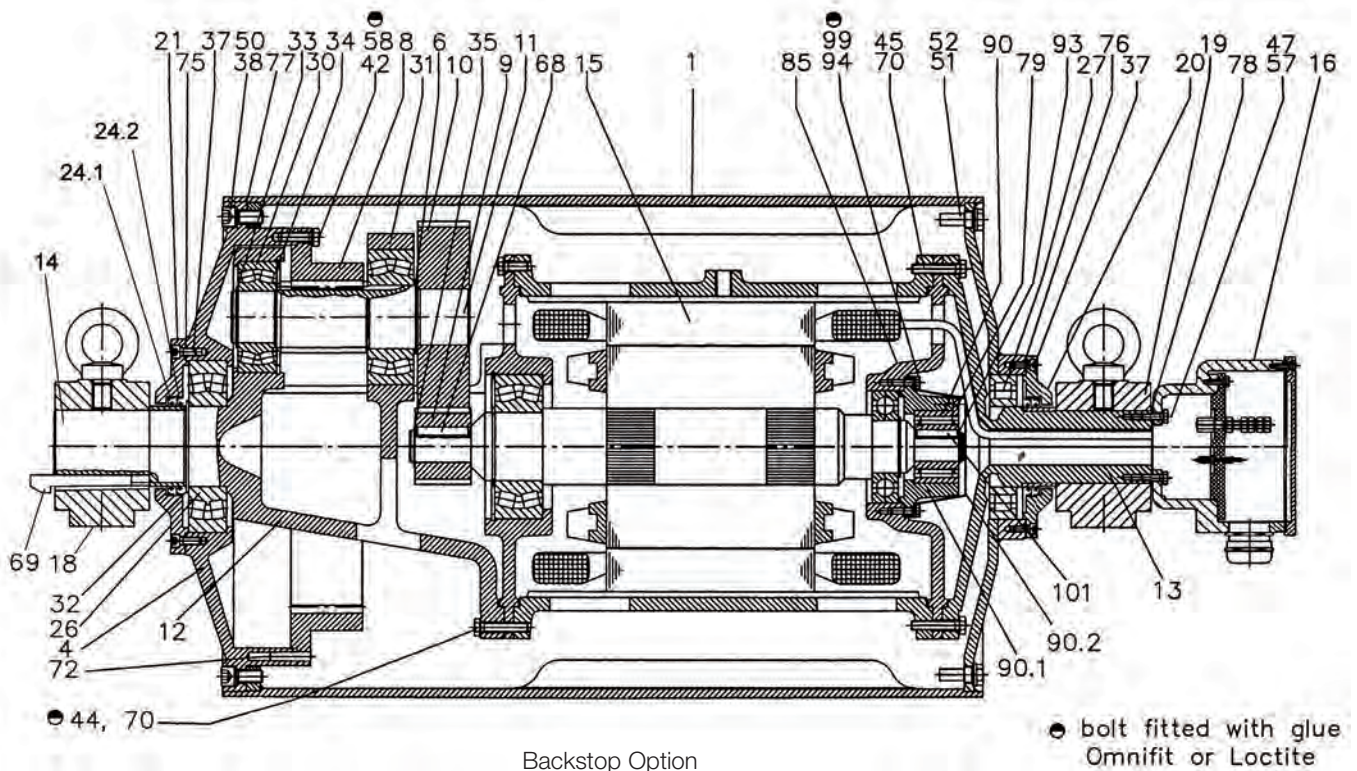



Motorized Pulley 800M, 800H, & 800HD Ø 31.50 in. (800 mm)

Our 31.50" diameter Motorized Pulley range offers two different performance levels for BULK applications:

- M for Medium duty
- H for Heavy duty

It is important to note the product differences and choose the appropriate pulley based on estimated belt tension (radial load.) See page 82. The actual radial load must be less than the maximum allowable radial load shown in this catalog.

Be aware of increased belt tensions required to drive multi-ply thick heavy belts and/or larger belt widths.

If the 800M is not strong enough to resist estimated belt tension, then select 800H.

M for Medium duty

A solid 2-stage gearbox enables the 800M to handle irregular loadings in harsh operating conditions. 800M uses motor and gearbox from 630H. Note that 800M outer dimensions do not match 800H

H for Heavy duty

800H has stronger internal components with gearbox, shaft, and bearings designed for tough, irregular, and extreme operating conditions.

STANDARD SPECIFICATION of Motorized Pulley

- Crowned mild steel 31.50" diameter steel shell painted yellow at a minimum thickness of 2.4 mils
- Bolted powder coated cast iron bearing housings and covers, all painted yellow at a minimum thickness of 2.4 mils
- Mild steel shafts
- Shaft sealing system - degree of protection IP66/67 (EN60034-5.) See page 37.
- Cast iron terminal box for painted yellow at min.thickness of 2.4 mils
- 3-phase induction motors with thermal protector
- Voltage: All common voltages available. Please specify.
- Motor winding insulation Class F
- Dynamically balanced rotor
- Two oil plugs each fitted with a magnet to filter the oil
- Yellow painted mounting brackets (AL & ALO) included with pulley
- Oil change recommended every 10,000 operational hours
- Minimum RL. Refer to pages 69-70
- Maximum RL - Please inquire
- Non standard RL's available
- To be used in horizontal positions ± 5 degree only

Please note:

- **Noise-sensitive Areas:** High speed 2-pole motors can cause higher noise levels and are not recommended for noise-sensitive areas
- **Technical Precautions for Design, Installation, and Maintenance:** pages 80-90
- **Environmental Considerations:** pages 78-79
- **Optional Extras:** page 67
- **Electrical Connection Diagrams:** pages 94-101

SEMI-RUST-FREE options

TS11

- Polyurethane painted mild steel shell at minimum thickness of 4.7 mils
- Polyurethane painted cast iron end housings at min. thickness of 4.7 mils
- Stainless steel bearing covers with labyrinth grooves – AISI 304 range
- Nitrided shaft sleeves
- Zinc-plated oil plugs - each with magnet
- Zinc-plated exterior bolts
- Shaft sealing system – degree of protection P66/67 (EN60034-5) See pg 37.
- Polyurethane painted terminal box at minimum thickness of 4.7 mils
- Nickel plated mounting brackets with labyrinth grooves

TS12

- As TS11, but without regreasable seals.
- Covers - standard

Please note:

- FDA & USDA food grade recognized oil and grease are not included in TS11 & TS12, but available on request.

Please specify required TS number when ordering Stainless Steel options.



OPTIONAL EXTRAS

Motorized Pulley 800M, 800H, & 800HD

Specification	Availability
Semi-rust-free option TS11 with regreasable labyrinth seals	x
Semi-rust-free option TS12 with standard seals	x
Regreasable labyrinth seals	x
Dust explosion proof Motorized Pulleys - ATEX 95 - Zone 22 - for applications handling of dusty grain etc. According to European Directive 94/9/EC.	x
Standard black rubber lagging (See pages 82-83.)	
3/8" full smooth lagging - Hardness 60 ±5 Shore A	o
3/8" full diamond lagging - Hardness 60 ±5 Shore A	o
3/8" partial smooth lagging - Hardness 60 ±5 Shore A	o
White smooth rubber lagging (FDA listed) - Oil, fat & grease resistant	o
Special lagging - e.g. hot vulcanized, partial, and ceramic (See page 80.)	o
External brake shaft (for mechanical brake by others)	x
Mechanical backstop	
Min. RL = 37.40" for 800M	x
Min. RL = 45.28" for 800H ≤ 100 HP	x
Min. RL = 55.12" for 800H > 100 HP	x
Insulation class F with standard oil: (allowable ambient temperature: -13°F/+104°F)	Std.
Insulation class H with synthetic oil: (allowable ambient temperature: -13°F/+120°F)	x
Parallel shell	x
Thermal protection switch	Std.
Temperature monitoring device (PT100 RTD or PTC)	x
Thermal protection switch and temperature monitoring device (PT100 RTD or PTC)	x
Voltage: Single voltage (460) stator (Y winding) wired for 460v/3ph/60 Hz at terminal box	Std.
IP66/67 Standard yellow powder coated cast iron terminal box	Std.
Special voltage motors	x
Special zinc-rich epoxy paint	x
CSA approved motors	x

x = Optional extras


o = An option with certain limitations. Please refer to Technical precautions pages 80-90.

Std. = Fitted as standard




Motorized Pulley 800M, 800H, & 800HD Ø 31.50 in. (800 mm)


Motorized Pulley with terminal box

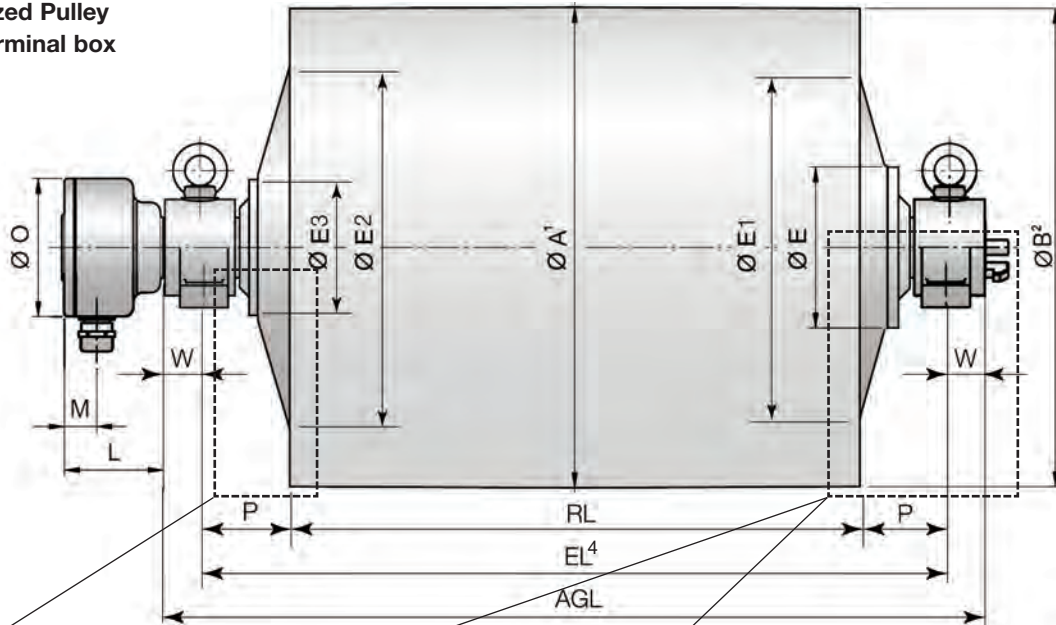


Optional external brake shaft

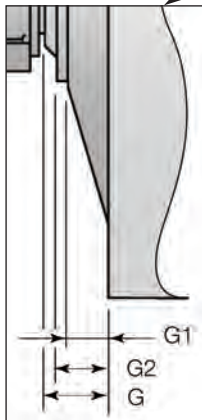



Models 800H and 800HD

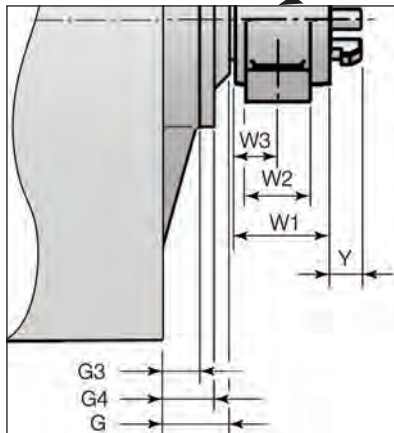

Model 800H

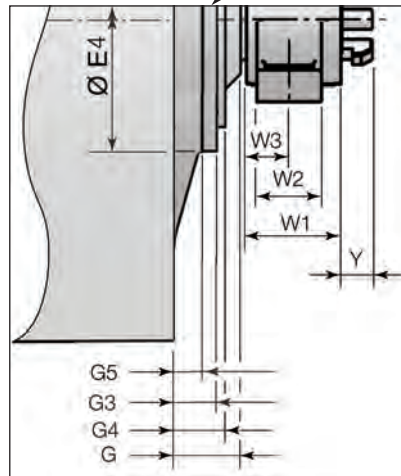

Model 800HD




Model	Dimensions ⁵																		
	A in	B in	D ³ in	E in	E1 in	E2 in	E3 in	E4 in	G in	G1 in	G2 in	G3 in	G4 in	G5 in	L in	M in	O in	P in	Y in
800M	31.50	31.34	3.54	10.55	24.02	24.41	8.90	n/a	3.58	2.13	2.68	1.81	2.56	n/a	6.50	2.13	9.06	5.91	2.0
800H	31.50	31.34	4.72	12.99	26.77	26.77	12.99	n/a	3.35	1.61	2.32	1.61	2.32	n/a	7.87	2.44	10.24	5.91	2.5
800HD	31.50	31.34	4.72	12.99	26.77	26.77	12.99	16.46	3.35	1.61	2.32	1.93	2.32	0.75	7.87	2.44	12.24	5.91	2.5

- 1 A dimension is outer diameter of unlagged pulley shell at pulley centerline.
- 2 B dimension is outer diameter of unlagged pulley shell at each end of shell.
- 3 D dimension is shaft diameter.
- 4 EL = mounting centers
- 5 Dimensions E, E1, E2, E3, E4, G, and G3 may vary +/- 0.25 in because they do not refer to machined parts. G dimension does not apply to lab seals (see pg 73).



Motorized Pulley 800M, 800H, & 800HD, Ø 31.50 in. (800 mm) 60 Hz

Mounting Brackets

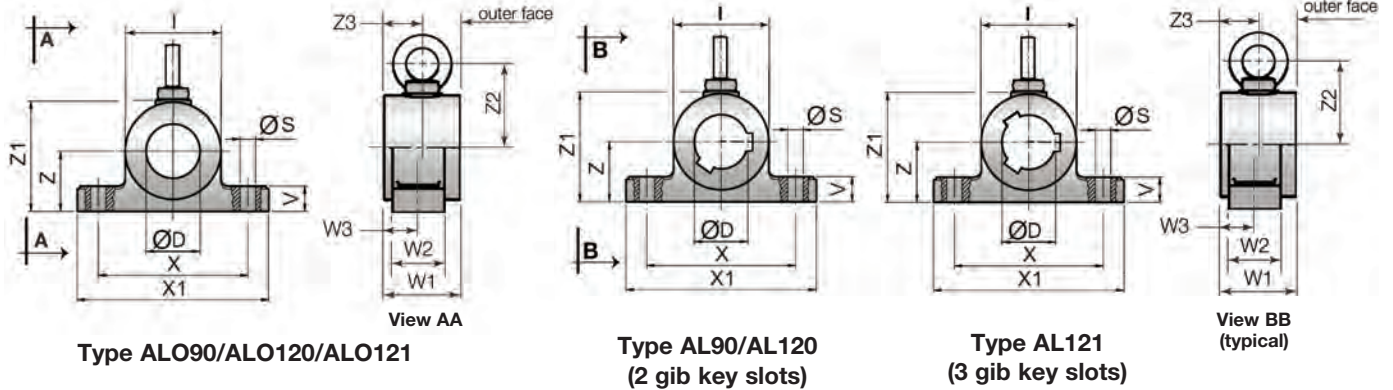

Motorized Pulleys Model	Material	Bracket Size	Dimensions														Weight lbs
			D in	I in	S in	V in	W in	W1 in	W2 in	W3 in	X in	X1 in	Z in	Z1 in	Z2 in	Z3 in	
800M	Cast steel	AL90/ALO90	3.54	6.30	1.02	1.65	2.40	4.60	3.15	2.30	9.84	12.60	3.94	7.20	5.14	2.30	41.89
800H	Cast steel	AL120/ALO120	4.72	7.87	1.30	1.97	3.74	6.30	4.72	2.56	11.81	14.57	4.33	8.39	6.31	3.15	83.78
800HD	Cast steel	AL121/ALO121	4.72	7.87	1.30	1.97	3.74	6.30	4.72	2.56	11.81	14.57	4.33	8.39	6.31	3.15	83.78

Motor		No. Gear Stages	Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Min. RL in	RL Dimension inches (RL > 78.74" available on request)										Type of Bracket				
Power HP	No. of Poles								Weight in lbs ⁵														
										37.40	39.37	41.34	43.31	45.28	47.24	49.21	51.18	53.15	longer than 53.15				
30	8	2	800M	300	312	2966	16,500	37.40	2118	2150	2179	2211	2241	2266	2291	2323	2354						
				384	396	2333																	
				480	515	1797																	
				600	621	1489																	
				760	806	1148																	
40	8	2	800M	300	312	4045	22,000	37.40	2207	2239	2268	2300	2329	2354	2379	2411	2443						
				384	396	3182																	
				480	515	2451																	
				600	621	2030																	
				760	806	1565																	
50	6	2	800M	384	416	3741	22,000	37.40	2207	2239	2268	2300	2329	2354	2379	2411	2443						
				480	528	2944																	
				600	686	2267																	
				760	828	1877																	
				960	1075	1448																	
61	4	2	800M	600	614	3034	19,900	37.40	2251	2282	2312	2343	2373	2398	2423	2455	2486						
				760	786	2386																	
				960	983	1838																	

1 Use "nominal belt speed" to specify pulley. "Actual belt speed" is presented (for pulley lagged with 3/8" thick rubber) to assist with process design calculations. See Technical Precautions page 81. Note that "actual belt speed" decreases when lagging is not used due to decreased pulley diameter.

2 Belt pull value allows for gearbox loss.

3 Pulley must not be subjected to radial load exceeding "Maximum radial load" defined above. See "Belt Tension" section in Technical Precautions, page 82.

4 Additional Motorized Pulley weight: Model 800M: 53.15" ≤ RL ≤ 78.74" Wt = 16.1 lbs/in; Model 800H & 800HD: 66.93" ≤ RL ≤ 78.74" Wt = 31.5 lbs/in.

5 Weights above include mounting brackets and are for pulleys "fully lagged" with 3/8" thick rubber. For "partially lagged" model 800M add 5% to 8% (for 800H add 3% to 4%) to the weights shown above. See pages 45, 82, & 83 for "partial lagging." To calculate unlagged pulley weight subtract 0.9 lbs/in of RL from above.

Rulmeca offers return, snub, and idler pulleys with dimensions to match our Motorized Pulleys on request.



Motorized Pulley 800M, 800H, & 800HD Ø 31.50 in. (800 mm)

Motor		No. Gear Stages	Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Min. RL in	RL Dimen. inches (RL>78.74" avail. on request)									Weight in lbs ⁵ longer than 70.87	Type of Bracket		
Power HP	No. of Poles								55.12	57.09	59.06	61.02	62.99	64.96	66.93	68.90	70.87				
75	8	3	800HD	240	248	9331	74,000	51.18	5323	5381	5439	5497	5555	5614	5672	5730	5788	See Note ⁴	AL121 & ALO121		
	6			300	330	7013															
	8			384	380	6087															
	6	2	800H	480	507	4565	45,000	45.28	4823	4881	4939	4997	5055	5114	5172	5230	5288		AL120 & ALO120		
				600	617	3749															
				760	740	3124															
100	8	3	800HD	240	248	12442	74,000	61.02	-	-	-	5497	5555	5614	5672	5730	5788	See Note ⁴	AL121 & ALO121		
	6			300	330	9350															
	8			384	380	8300															
	6	2	800H	480	507	6226	45,000	45.28	4823	4881	4939	4997	5055	5114	5172	5230	5288		AL120 & ALO120		
				600	617	5111															
				760	740	4260															
122	6	3	800HD	384	399	9434	74,000	61.02	-	-	-	5608	5666	5724	5782	5840	5898	See Note ⁴	AL121 & ALO121		
	6			2	800H	480													507	7470	
						600													617	6134	
		760	740			5111															
	150	6	3	800HD	384	399	9434	74,000	61.02	-	-	-	5608	5666	5724	5782	5840		5898	See Note ⁴	AL121 & ALO121
		4			2	800H	480														495
600							654											7039			
760			760	6087																	
180		4	3	800HD	480	495	11160	74,000	61.02	-	-	-	5641	5699	5757	5815	5873	5931	See Note ⁴		AL121 & ALO121
		4			2	800H	600														654
	760						760													7304	
	960		926	5997																	
	180	4	3	800HD	480	495	11160	74,000	61.02	-	-	-	5641	5699	5757	5815	5873	5931		See Note ⁴	AL121 & ALO121
		4			2	800H	600														654
760							760												7304		
960			926	5997																	
180		4	3	800HD	480	495	11160	74,000	61.02	-	-	-	5641	5699	5757	5815	5873	5931	See Note ⁴		AL121 & ALO121
		4			2	800H	600														654
	760						760													7304	
	960		926	5997																	
	180	4	3	800HD	480	495	11160	74,000	61.02	-	-	-	5641	5699	5757	5815	5873	5931		See Note ⁴	AL121 & ALO121
		4			2	800H	600														654
760							760												7304		
960			926	5997																	

- Use "nominal belt speed" to specify pulley. "Actual belt speed" is presented (for pulley lagged with 3/8" thick rubber) to assist with process design calculations. See Technical Precautions page 81. Note that "actual belt speed" decreases when lagging is not used due to decreased pulley diameter.
- Belt pull value allows for gearbox loss.
- Pulley must not be subjected to radial load exceeding "Maximum radial load" defined above. See "Belt Tension" section in Technical Precautions, page 82.
- Additional Motorized Pulley weight: Model 800M: 53.15" ≤ RL ≤ 78.74" Wt = 16.1 lbs/in; Model 800H & 800HD: 66.93" ≤ RL ≤ 78.74" Wt = 31.5 lbs/in.
- Weights above include mounting brackets and are for pulleys "fully lagged" with 3/8" thick rubber. For "partially lagged" model 800M add 5% to 8% (for 800H add 3% to 4%) to the weights shown above. See pages 45, 82, & 83 for "partial lagging." To calculate unlagged pulley weight subtract 0.9 lbs/in of RL from above.


Rulmeca offers return, snub, and idler pulleys with dimensions to match our Motorized Pulleys on request.



Motorized Pulley 800M & 800H 31.50 in. (800mm)

Spare parts list and sectional drawings

Pos.	Description	Pos.	Description	Pos.	Description
1	Shell	24.3	Shaft oil seal inner (lab option)	75	Gasket
4	End housing with geared rim	24.4	Shaft oil seal outer (lab option)	76	Gasket
5	End housing	26	Bearing	77	Gasket
6	Distance washer	27	Bearing	78	Gasket
8	Geared rim	30	Bearing	79	Holding plate
9	Rotor pinion	31	Bearing	85	Motor flange for backstop/brake
10	Input wheel	32	Retaining ring	90	Backstop
11	Output pinion	33	Retaining ring	90.1	Backstop housing
12	Gear box including rear shaft	34	Retaining ring	90.2	Backstop cover
13	Front shaft	35	Retaining ring	93	Retaining ring
14	Rear shaft	37	Hexagon socket screw	94	Hexagon head screw
15	Stator complete	38	Hexagon socket screw	99	Spring washer
15.1	Rotor	42	Hexagon head screw	101	Key
16	Terminal box complete	44	Hexagon head screw	123	Grease nipple
17	Nipple (for 500H/630M only)	45	Hexagon head screw	130	Brake shaft
18	Mounting bracket rear side	47	Hexagon head screw	131	Mounting bracket bearing cover
18.1	Mtg bracket rear side (lab option)	50	Washer	132	Roller bearing
19	Mounting bracket front side	51	Gasket	133	Brake shaft seal
19.1	Mtg bracket front side (lab option)	52	Magnetic oil plug	134	Brake shaft seal
20	Cover - front side	57	Washer	135	Retaining ring
20.1	Cover with labyrinth groove	58	Spring washer	136	Bolts - bearing cover
21	Cover - rear side	68	Key	137	Spring lock washer
22.1	Cover with labyrinth groove	69	Gib key	138	Key
23	Rear flange	70	Waved spring washer	139	Retaining ring
24.1	Shaft oil seal outer	72	Grooved pin	140	Key
24.2	Shaft oil seal inner	73	Set screw		


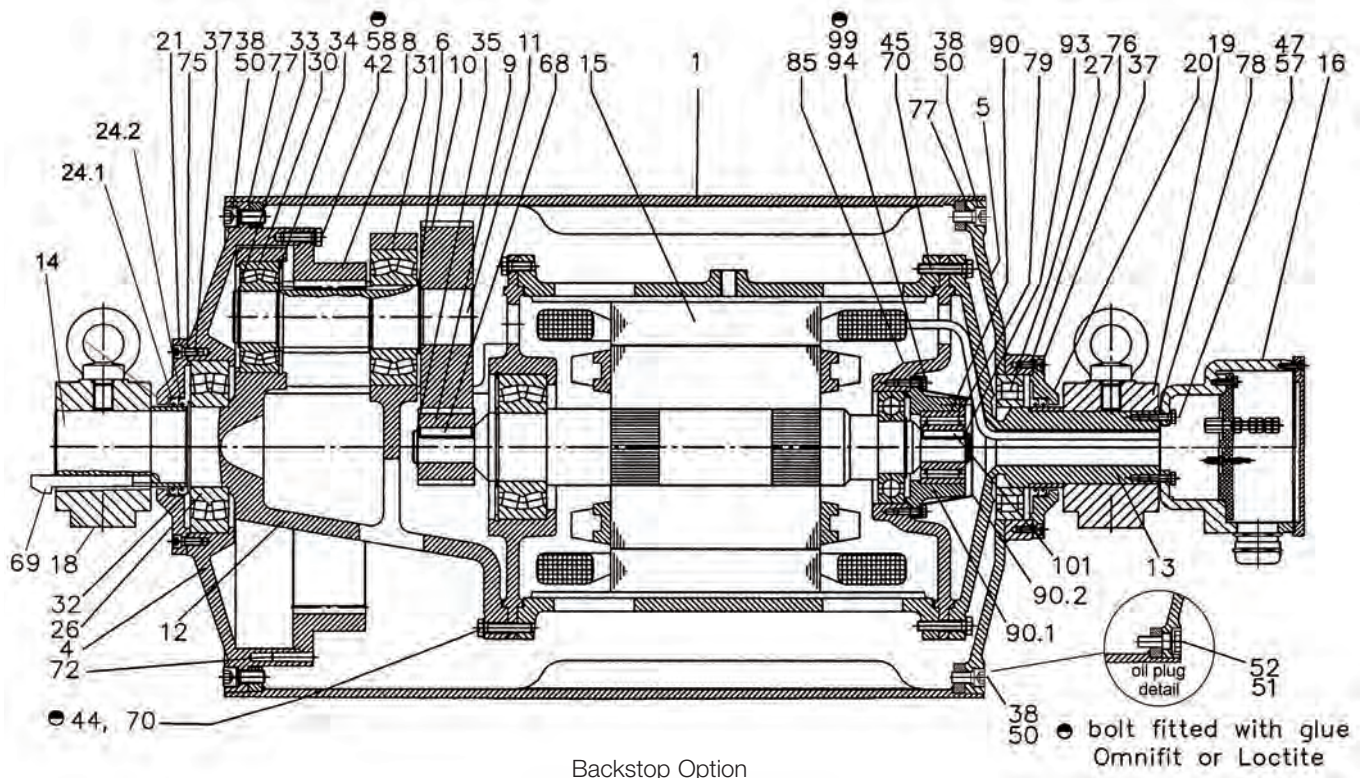




Motorized Pulley 800HD 31.50 in. (800mm)

Spare parts list and sectional drawings


Pos.	Description	Pos.	Description	Pos.	Description
1	Shell	24.1	Shaft oil seal outer	131	Mounting bracket bearing cover
4	End housing with geared rim	24.2	Shaft oil seal inner	132	Roller bearing
5	End housing	24.3	Shaft oil seal inner (lab option)	133	Brake shaft seal
6	Distance washer	24.4	Shaft oil seal outer (lab option)	134	Brake shaft seal
8	Geared rim	26	Bearing	135	Retaining ring
9	Rotor pinion	27	Bearing	136	Bolts – bearing cover
10	Input wheel	28	Bearing	137	Spring lock washer
11	Output pinion	30	Bearing	138	Key
12	Gear box – cast steel	31	Bearing	139	Retaining ring
13	Front shaft	32	Retaining ring	140	Key
14	Rear haft	33	Retaining ring	188	Retaining ring
15	Stator complete	34	Retaining ring	189	Retaining ring
16	Terminal box complete	35	Retaining ring	190	Retaining ring
18	Mounting bracket rear side	37	Hexagon socket screw	180	Intermediate pinion shaft
18.1	Mounting bracket rear side (lab option)	38	Hexagon socket screw	181	Intermediate pinion
19	Mounting bracket front side	42	Hexagon head screw	182	Distance bushing
19.1	Mounting bracket front side (lab option)	44	Hexagon head screw	183	Washer
20	Cover – front side	45	Hexagon head screw	184	Roller bearing
20.1	Cover with labyrinth groove	47	Hexagon head screw	185	Roller bearing
21	Cover – rear side	50	Washer	187	Key
21.1	Cover with labyrinth groove	51	Gasket	191	Retaining ring
	Intermediate stage	52	Magnetic oil plug	192	Retaining ring
		58	Spring washer	193	Distance washer
		68	key	194	Set screw
		69	Gib key	195	Prevailing torque type hex nut
		70	Waved spring washer	196	Key
		72	Grooved pin	197	Retaining ring
		73	Set screw	205	Retaining ring
		75	Gasket	206	Retaining ring
		76	Gasket	207	Retaining ring
		77	Gasket	208	Protective ring
		78	Gasket	209	Eye bolt
		85	Motor flange for backstop	210	Washer
		90	Backstop complete	211	Cable gland
		123	Grease nipple	212	Retaining ring
		130	Brake shaft	220	Insulation plate

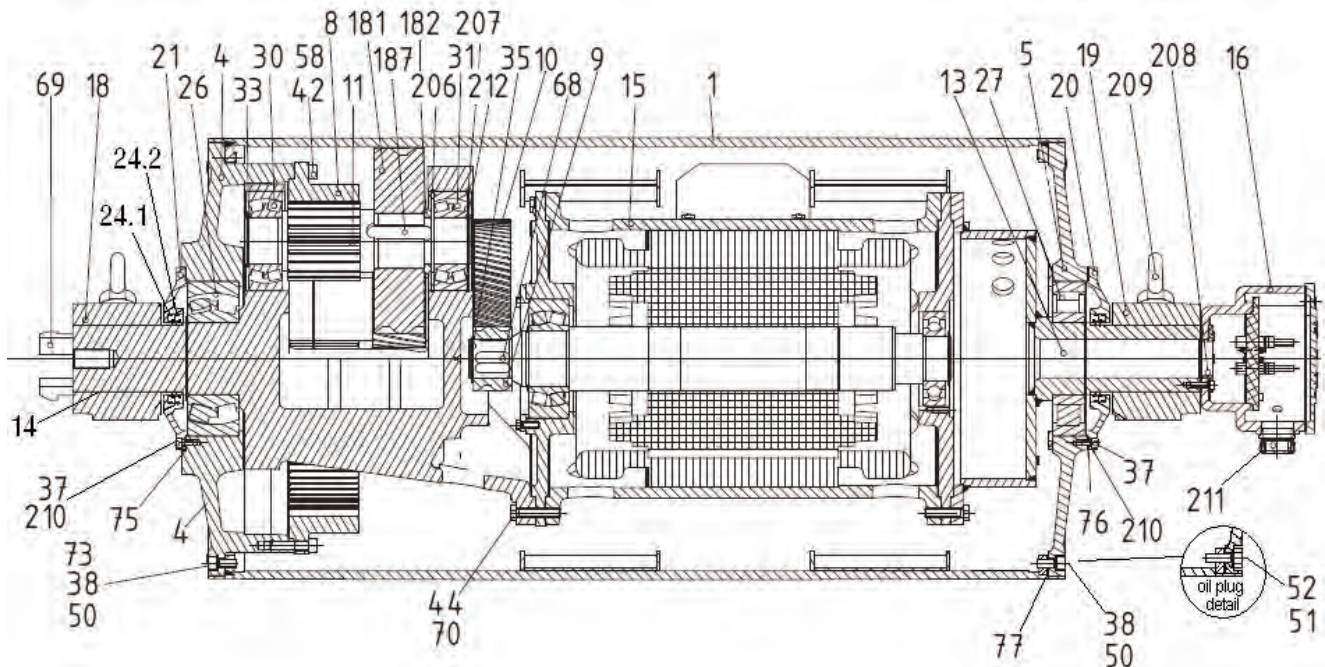




Motorized Pulley 800M, 800H, & 800HD Ø 31.50 in. (800mm) Sectional drawings

Labyrinth Seal Option

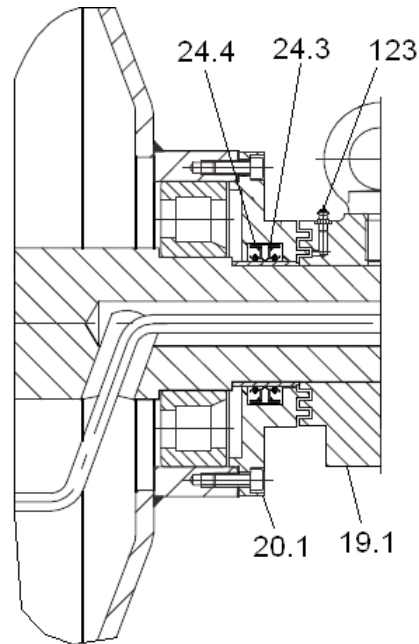

External Brake Shaft Option

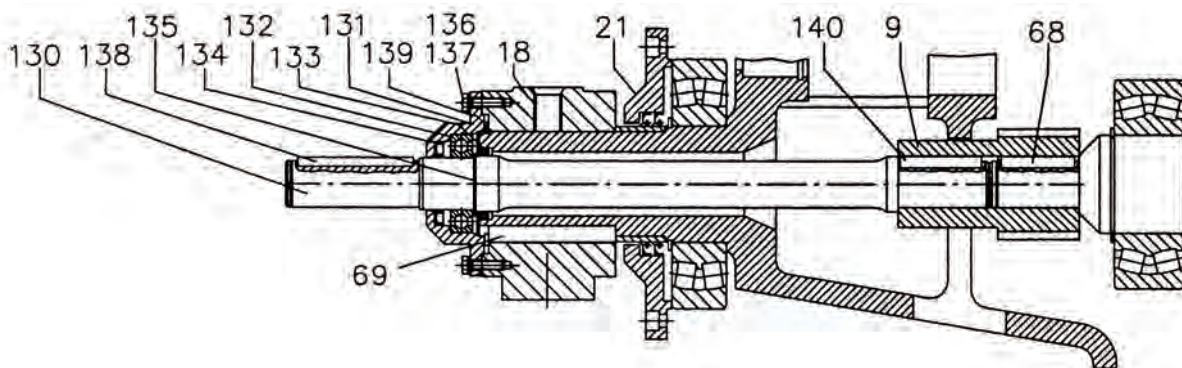



Motorized Pulley 1000H & 1000HD, Ø 40.16 in. (1020 mm)

The RULMECA Motorized Pulley type 1000H and 1000HD are highly reliable and strong drives with a power range of 220–330 HP. They are able to take a high radial load and are robust in design. Therefore, it is especially developed for use in:

- Mining conveyors,
- Excavators,
- Stackers,
- Reclaimers, and
- Ship loading conveyors.

The Motorized Pulleys 1000H and 1000HD are designed for tough, irregular, extreme working conditions.

The compact design allows the design engineers to save material and cost when developing the conveyor.

With its high protection rating and its standard labyrinth sealing system, this Motorized Pulley can be used in all ambient conditions.

STANDARD SPECIFICATION of Motorized Pulley

- Crowned mild steel shell, outside diameter 40.16 in.
- Mild steel shafts.
- Totally enclosed cast iron brackets,
- Shell lagged with 0.39 in thick bonded ceramic lagging,
- Bearing houses from cast steel.
- Three stage cast steel gearboxes.
- Sealing system with degree of protection IP66/67 (EN60034-5).
- Terminal box from cast iron.
- 3-phase induction motors with 3 phase single voltage,
- Std. voltage 460v/3ph/60Hz,
- Please specify voltage.
- Motor winding insulation class H,
- 3 bimetallic thermal protection switches connected in series, 2 temperature monitoring devices (PT100 RTD) and 3 PTC-resistors connected in series installed in the winding.

- Rotor dynamically balanced.
- 2 oil plugs (with magnet).
- Minimum roller length (RL = 55.12 in at 220 HP & 59.06 in at 330 HP,
- Synthetic oil EP220.
- First oil change recommended after 50,000 operational hours.
- Regreasable labyrinth seals.

Please Note:

- **Special speeds:** available on request.
- **Environmental conditions:** See pages 78-79.
- **Technical precautions:** See pages 80-90.
- **Optional extras:** See below.
- **Connection diagrams:** See pages 94-101.


OPTIONAL EXTRAS

Specification	Availability
Different types and shapes of ceramic lagging	x
Mechanical backstop	x
Dust explosion proof Motorized Pulleys - ATEX 95 - Zone 22 - for applications handling of dusty grain etc. According to European Directive 94/9/EC.	x
Degree of protection IP66/67	Std.
Allowable ambient temperatures	-13 degrees F to +120 degrees F
External brake shaft (for mechanical brake by others)	x
Motor protection and control by 3 bimetallic thermal protectors connected in series, 2 temperature sensors PT100 and 3 PTC-resistors connected in series	Std.
Insulation class H with synthetic oil	Std.
Voltage US (3 x 460V at 60 Hz), Europe (3 x 690V at 50 Hz,) with tolerances +/- 10% (DIN IEC 38)	Std.
IP66/67 cast iron terminal box	Std.
Other voltages from 400V up to 1000V	x
CSA approved motors	x

x = Optional extras
Std. = Fitted as standard



Motorized Pulley 1000H & 1000HD, Ø 40.16 in. (1020 mm)


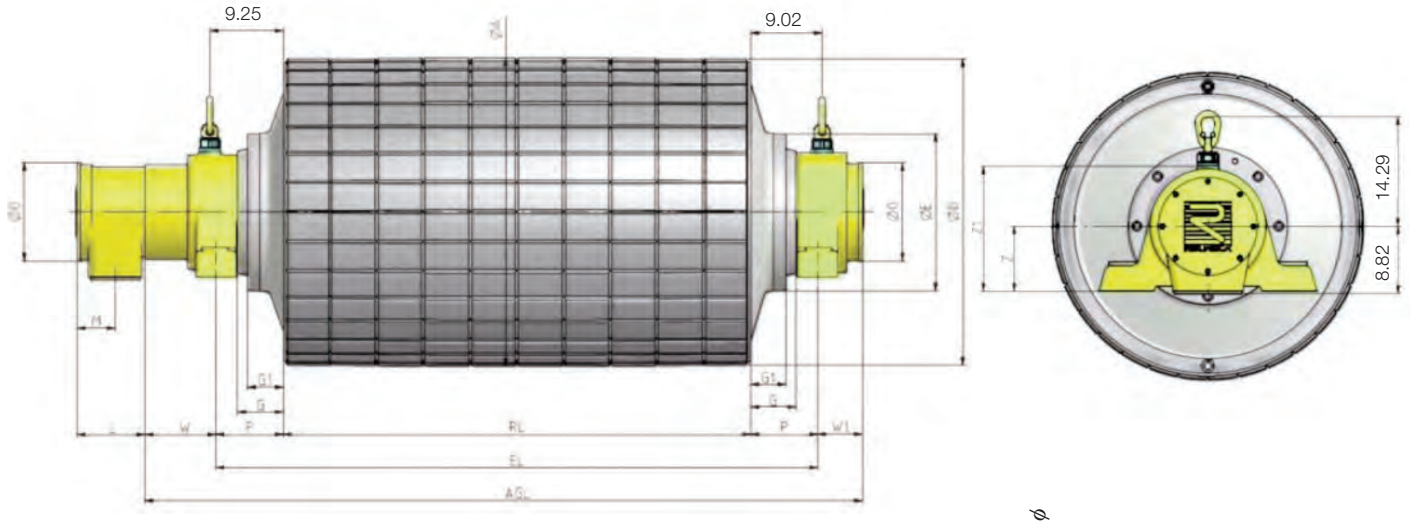


Motorized Pulley Dimensions

Type	A ¹ in	B ² in	D ³ in	E in	G in	L in	M in	O in	P in	W in	W1 in	W4 in
1000HD	40.16	39.92	7.99	20.47	5.71	8.58	4.80	12.79	8.46	8.98	5.63	5.91

- 1 A dimension is outer diameter of lagged pulley shell at pulley centerline.
- 2 B dimension is outer diameter of lagged pulley shell at each end of shell.
- 3 D dimension is shaft diameter.

Optional external brake shaft

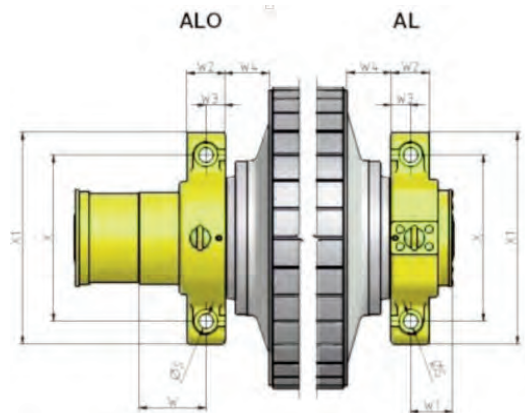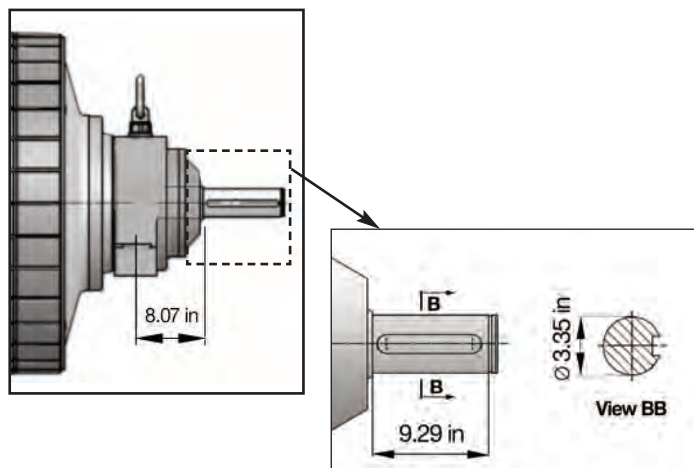

Bracket Dimensions

Type*	S in	W2 in	W3 in	X in	X1 in	Z in	Z1 in
AL	1.97	5.12	2.56	22.05	28.23	8.46	16.22
ALO	1.97	5.12	2.56	22.05	28.23	8.46	16.22

* AL is drive side bracket and is locked against rotation.

ALO is non-drive side bracket and is free to rotate.



Motorized Pulley 1000H & 1000HD, Ø 40.16 in. (1020 mm) 60 Hz

Motor		No. of Gear Stages	Model	Nominal belt speed ¹ at Full Load 60 Hz fpm	Actual belt speed ¹ at Full Load 60 Hz fpm	Belt Pull ² lbs	Max. Radial Load ³ T1 + T2 lbs	Min. RL in	RL Dimension inches (RL>70.87" available on request) Weight in lbs ⁵											
Power HP	No. of Poles								55.12	57.09	59.06	61.02	62.99	64.96	66.93	68.90	70.87	longer than 70.87		
220	6	3	1000HD	384	399	16,474	67,443	57.09	-	9,810	9,965	10,064	10,207	10,351	10,494	10,637	10,781	See Note ⁴		
				480	504	13,062		55.12	9,259	9,413	9,513	9,656	9,800	9,943	10,086	10,229	10,373			
	6	2	1000H	700	723	9,102	67,443	51.18	9,083	9,226	9,370	9,513	9,656	9,800	9,943	10,086	10,229			
				850	865	7,610														
	4	2	1000H	1064	1091	6,034	49,458	49.21	8,675	8,818	8,962	9,105	9,248	9,392	9,535	9,678	9,822			
				1300	1304	5,045														
				1550	1617	4,068														
				1850	1876	3,507														
				2000	2062	3,191														
				2250	2363	2,785														
270	4	3	1000HD	480*	507	16,242	67,443	57.09	-	9,811	9,965	10,064	10,207	10,351	10,494	10,637	10,781			
				600*	606	13,580														
				760	751	10,951														
				850	872	9,440														
				960	958	8,590														
	2	1000H	1064	1097	7,503	49,458	51.18	9,083	9,226	9,370	9,513	9,656	9,800	9,943	10,086	10,229				
			1300	1312	6,273															
			1550	1626	5,059															
			1850	1887	4,361															
			2000	2074	3,968															
2250	2376	3,463																		
330	4	3	1000HD	600*	602	17,069	67,443	59.06	-	-	10,362	10,516	10,615	10,759	10,902	11,045	11,188			
				760*	747	13,765														
				850	867	11,865														
				960	953	10,796														
	2	1000H	1064	1091	9,430	49,458	53.15	9,380	9,568	9,778	9,921	10,064	10,207	10,346	10,494	10,637				
			1300	1304	7,885															
			1550	1617	6,359															
			1850	1876	5,481															
			2000	2062	4,987															
			2250	2363	4,353															

* This power & speed can only be used with 100% load in clockwise direction of rotation. For counterclockwise rotation Motorized Pulley must be assembled in opposite manner. Please specify rotation direction when ordering.

Note: Please specify outer diameter of your power cable when ordering.

This Motorized Pulley must be started with VFD or soft starter.

- 1 Use "nominal belt speed" to specify lagged pulley. Actual full load belt speed of lagged pulley, will assist with process design calculations.
- 2 Belt pull value allows for gearbox loss.
- 3 Pulley must not be subjected to radial load exceeding "Maximum Radial Load" defined above. See "Belt Tension" section in Technical Precaution, page 82.
- 4 Additional Motorized Pulley weight: Models 1000HD and 1000H: 70.87" ≤ RL ≤ 98.43" Wt = 72.7 lbs/in.
- 5 All weights shown above include mounting brackets and are for pulleys "fully lagged" with 0.39" thick ceramic.

Rulmeca offers return, snub, and idler pulleys with dimensions to match our Motorized Pulleys on request.



Motorized Pulleys Variable Frequency Drives



Cement Plant Weigh Feeder - (Oklahoma—USA)

Weigh Feeder, driven by a flux vector VFD, has 30" wide belt with 4" sidewalls and is powered by a 16" diameter 5.5 HP model 400H Motorized Pulley with a belt speed range from <7 fpm to >70 fpm. Since amp draw and Motorized Pulley temperature were carefully monitored during commissioning, feeders are capable of moving a wide range of material throughput (from <10 tph to >70 tph.) VFDs automatically vary the power supply frequency over a very wide frequency spectrum.

Technical Precaution: Since Motorized Pulleys cool their motors by transferring heat through the pulley shell into the conveyor belt, it was essential to verify that adequate cooling was available through the wide frequency spectrum.




Cement Plant Dual Drive with Load-Sharing - (Oklahoma—USA)

A 550 foot long reclaim tunnel conveyor, fed by six feeders, has a concave vertical curve and elevates material from beneath the storage pile 138' up to the transfer tower. Original 75 HP drive in transfer tower was replaced by two 50 HP Motorized Pulleys, one on the tower and one in the tunnel, controlled and synchronized through the use of two flux vector VFDs.

Note : This control system insures load-sharing and provides overcurrent protection, ramp up and ramp down, and variable belt speed, if necessary.

The dual drive configuration also eliminated belt bounce in the vertical curve. Previously when the conveyor was started empty, it bounced up at least 4 feet and damaged the belt and feeder support structure.

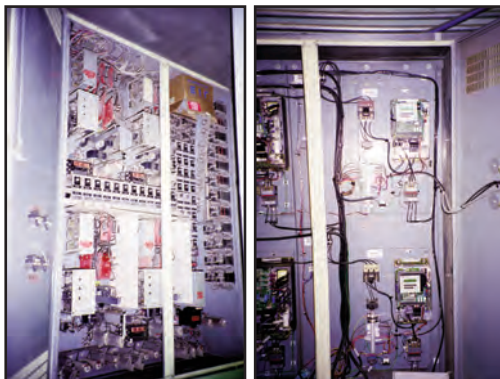

Taconite Plant Control Panel- "Before & After" (Minnesota—USA)

Left photo shows control panel of taconite plant DC-powered variable speed conveyor control system before 1995 conversion to AC drives. Note SCR's, relay banks, and timer banks.

Right side shows control panel after conversion to AC motorized pulleys controlled with variable frequency drives. Elimination of SCR's and relay banks improved reliability, simplified troubleshooting, and reduced energy loss.

Technical Precaution: The power and current range of the VFD must be selected according to the full load amperage given on the Motorized Pulley data plate.



Various Limestone Quarries (Georgia—USA)

Photo shows two of ten 15.75" diameter Motorized Pulleys installed 1994-1998 to automatically "choke feed" tertiary gyratory crushers. Working in combination with a VFD and an ultrasonic sensor, each Motorized Pulley drives a 36" wide belt at a maximum speed of 120 FPM to transfer 4" minus product from hopper to crusher throat at 425 TPH.

Technical Precaution: Do not allow resonant frequencies in the power line to cause voltage spikes in the motor. Potential resonant frequencies may be eliminated by limiting the distance between the VFD and the motor, installing a filter on the VFD output, and/or selecting a VFD which modulates pulse width in a manner so as to avoid resonance.



Applications in Special Environmental Conditions

Abrasive, Wet, High Humidity Environments



Hermetically sealed carbon steel tube and end housings with standard paint are suitable for most bulk applications. However, aggressive environments may require regreasable seals, special finish, or stainless steel. See pages 88-89.

Articulating Conveyors

Electromagnetic brakes or external brake shafts for brakes (by others) provide suitable material “holdback” capability for articulating conveyors. Mechanical backstops will not work in this application because these conveyors elevate and lower material. See pages 59, 83, & 84.

Chemical/Corrosive Environments

Aggressive environments may require regreasable seals, special lagging material, special finish, or stainless steel. See pages 84, 85, & 89.

Critical Speed Requirements

Actual belt speed is a function of motor pole number, gear ratio, and load. This catalog displays actual full load belt speed of a lagged Motorized Pulley at nominal voltage and 60 Hz to assist designers who need precise belt speeds. See page 79.

Dust & Gas Environments

Rulmeca Motorized Pulleys with IP67 sealing are available with optional certification for service in an ATEX 95 Class II (“dust explosion proof”) Zone 22 atmosphere, according to European Union Directive 94/9EC article 8. Note that Rulmeca Motorized Pulleys are not “intrinsically safe” or “flame proof” and are not suitable for service in: Class I (gasses, vapors, & liquids), Class II Zone 20, or Class II Zone

21 environments. See page 83.

Elevating Conveyors

Mechanical backstops provide suitable material “holdback” capability for fixed position, non-reversing, inclined conveyors. See pages 59, 85, & 86.

Food Handling




Regreasable seals, full stainless steel, and food grade oil, grease, and lagging material are suitable for this environment, which usually includes frequent high pressure/chemical wash down. See pages 84, 85, & 89.

High Altitude >3,300 ft Above Sea Level (ASL)

Standard Rulmeca Motorized Pulleys provide suitable performance in mountainous areas. When specifying motor power derate by 2.5% for elevations of 3,300-5,000’ ASL and 5% for elevations of 5,000-6,600’ ASL. Contact Rulmeca for assistance with higher elevations.

High Ambient Temperature

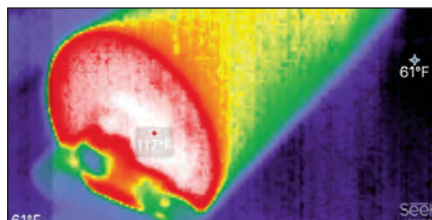

Standard Rulmeca Motorized Pulleys with Class F motor and standard oil are suitable for use in a maximum ambient temperature of 104 °F. Motorized Pulleys with Class H motor and synthetic oil are suitable for use in a maximum ambient temperature of 120 °F. For higher ambient temperature conditions contact Rulmeca. See pg 81, 82, & 93.

High Duty Cycle (Frequent Start/ Stops)

Model	Max. No. of Start/stops
138LS	240 per hour
165LS	180 per hour
220M & 220H	120 per hour
320L, 320M, 320H, 400L, 400M & 400H	25 per hour
500L, 500M, 500H, 630M, 630H, 800H, & 800HD	10 per hour
1000HD	5 per hour

Standard Rulmeca Motorized Pulleys are suitable for frequent starting and stopping, without the use of soft start devices, as shown above. More frequent starts/stops are possible through the use of optional special pulley construction and/or soft starters. Contact Rulmeca for details. See page 84.

Impact Loading

Conveyors subject to frequent impact loading (i.e. non-continuous material flow) may require higher motor power and stronger gearbox than indicated by “continuous flow” belt pull calculations. Contact Rulmeca. See page 82, 86, & 88.

Indexing (Induction) Conveyors



Electromagnetic brake provides excellent product “hold” capability in induction systems requiring “indexing.” See pg 83-84.

Low Ambient Temperature

Rulmeca Motorized Pulleys with standard motor and oil are suitable for use in a minimum ambient temperature of -13°F. Optional food grade oil lowers the pulley



Applications in Special Environmental Conditions

operating temperature range to a minimum of -22°F. Contact Rulmeca for lower operating temperatures. Special oil, special seals, and internal anti-condensation heater may be required. See pages 81, 82, and 93.

Marine Environment



Corrosive ocean environment often requires regreasable sealing system, stainless steel or special surface finish. See page 89.

Noise-Sensitive Environments



In noise-sensitive areas (e.g. locations where public access to conveyors is permitted) certain Motorized Pulley design restrictions apply. Contact Rulmeca for special oil viscosities and quantities, specially balanced pulleys, and when to avoid the use of 2 pole motors.

Non-belt Applications



Special Motorized Pulley designs are available for “non-belt, V-belt, partial belt, and modular belt” applications. It is essential that each special application be designed to adequately dissipate heat from the pulley surface. Contact Rulmeca for assistance with these applications. See pages 81, 82, and 88.

Non-horizontal Mounting (i.e. between 5° - 90° and Vertical)



Certain applications (e.g. self-cleaning electromagnet for tramp iron, pictured above, “tilted” package sortation conveyors, and “travelling wall”) require pulley shaft to be mounted out of the horizontal plane. This Motorized Pulley option requires extra oil, grease packed top bearing, and special electrical termination. Contact Rulmeca for assistance. see pages 86, 87, 88, and 93.

Oily, Greasy, & Fatty Materials



Environments with high amounts oil, grease, and/or fat require special oil-resistant lagging. If they require frequent high pressure and/or chemical cleaning they may also require regreasable seals and stainless steel or special surface coating. See pages 84, 85, and 89.

Reversible Conveyors

All standard three-phase Rulmeca Motorized Pulleys are suitable for use in reversing conveyors. However, motor control circuit must be designed to bring pulley to a complete stop before reversing direction. See page 89.

Starting Under Load

All Rulmeca Motorized Pulley motors are “Design C” and developed for direct starting. They provide 200% start-up torque when started directly. To reduce inrush (start-up) current it is possible to use starting device such as soft starter or variable frequency drive. Note that these devices may reduce start-up torque. See pages 86 and 90.

Underground Mining & Tunneling Applications



Rulmeca Motorized Pulleys have been incorporated into underground mining and tunnel boring machines. However, they are not “intrinsically safe” or “flame proof” and are not suitable for service where explosive gasses, vapors, liquids, or dust are continuously present. Contact Rulmeca for additional details.

Underwater applications

The Rulmeca Motorized Pulley IP67 sealing system has been successfully tested for 30 minutes under 1 m of water. However, the motor is not intended for continuous underwater service.

Variable Speed Conveyor

Two speed motor. AC frequency converter. See page 90.



Technical Precautions for Design, Installation and Maintenance



WARNING Read and follow all safety instructions! These instructions contain important sections on design, installation, safety, use, maintenance, parts replacement, and other technical information. Always include these instructions with pulley. Use these precautions with Rulmeca catalog TC-101.



CAUTION Read the manual before installing or operating the pulley. Failure to understand how to install or operate the pulley could cause personal injury or even death. Any modification made to or unintended use of the pulley could create a hazardous condition that could cause death or serious injury. Precautions which could effect warranty or create hazardous condition are marked with a safety symbol.



Contents

Page

1	Actual Belt Speed vs. Nominal Belt Speed.....	81
2	Aftermarket Service.....	81
3	Ambient Temperature.....	81-82
4	Belt Alignment.....	82
5	Belt Pull.....	82
6	Belt Tension.....	82
7	Capacitors for Single Phase Motors.....	82-83
8	Clearance.....	83
9	Dust explosion proof (ATEX 95) Motorized Pulleys	83
10	Electrical Installation.....	83
11	Electromagnetic Brake.....	83-84
12	Guarding & Lock Out/Tag Out.....	84
13	High Duty Cycle.....	84
14	Lagging Description.....	84
15	Lagging Limitations.....	84-85
16	Mechanical Backstops.....	85-86
17	Motor Current Overload and Overcurrent Protection.....	86
18	Motor Thermal Protection.....	86
19	Motorized Pulley Mounting Orientation.....	86-87
20	Mounting Brackets.....	87-88
21	Non-belt, Partial Belt, Modular Belt.....	88
22	Oil and Oil Seal Maintenance.....	88
23	Pulley Diameter.....	88
24	Regreasable Labyrinth Seals.....	89
25	Reversing Conveyors.....	89
26	Surface Coating.....	89
27	Storage of Motorized Pulleys.....	89
28	Start-up.....	89-90
29	Terminal Box.....	90
30	Transport and Handling.....	90
31	Variable Frequency Drive.....	90
32	Oil Quantities.....	92
33	Oil Specifications.....	93
34	Wiring Diagrams.....	94-101

IMPORTANT INFORMATION!

• After unpacking the pulley, inspect carefully for any damage that may have occurred during transit. Check to be sure all supplied accessories are enclosed with the unit. If you have questions regarding safety or damaged or missing parts, please call one of your nearest RULMECA representative listed at the back of the manual.

• Also, for testing the pulley, shafts must be fixed to a frame properly before motor is connected to the power supply and switched on. The shell must be protected against accidental contact because of rotating.

• It is the responsibility of the contactor, installer, owner and user to install, maintain and operate the conveyor, components and conveyor assemblies in such a manner as to comply with:

The Occupational Safety and Health Act and with any and all state and local laws and ordinances as to the national and international standards as to:

- ANSI – B20.1 Safety Code and Conveyor Equipment Manufacturers Association (CEMA) voluntary consensus standards which may prevail,
- ANSI – Z535 Warning label Series
- ISO 3864-2 Product Safety labels

When existing equipment is being retrofitted, upgraded or even changed, it is in customer's best interest to bring the equipment up to today's standards. If there are any questions, please contact RULMECA.

Refer to list shown below for explanation of the safety **NOTICE** symbols used in this section of the catalog.

Do not install standard Motorized Pulleys in areas with potentially explosive concentrations of vapors, gases, mists and dust.





Technical Precautions for Design, Installation and Maintenance

Explanation of the symbols:



This is the alert symbol. It is used to alert you to potential bodily injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

These instructions and other product accompanying literature contain information that is important to know and understand. To help recognize the information, observe these symbols.



DANGER

Danger indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.



WARNING

Warning indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.



CAUTION

Caution indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

NOTICE

Notice indicates important information, that if not followed, may cause damage to equipment.

1) Actual Belt Speed vs. Nominal Belt Speed:

- Two key specifications for each Motorized Pulley are power (HP) and nominal belt speed, as shown on individual specification pages in this catalog.
- Nominal belt speed is a design target, providing consistent choices among all models and powers. For example, a nominal belt speed of 300 fpm is available in most pulley models.
- Actual full load belt speed is almost never exactly equal to nominal belt speed.
- Actual belt speed is a function of the motor pole number, gear ratio, and load. Therefore, this catalog displays actual full load belt speed at 60 Hz, as well as nominal belt speed, to assist designers who need more precise belt speeds.
- Note that all belt speeds shown in this catalog refer to lagged pulleys, as described in the speed chart footnote for each model.
- Note that each Rulmeca Motorized Pulley for a three-phase power supply uses an asynchronous squirrel cage induction motor with approximately 5% slip. In a no load condition, motor RPM is nearly equal to “synchronous speed” RPM. The slip rate is dependent on power and design of the motor. Low powered motors have a lower slip rate than high-powered motors. At full load, the motor RPM is approximately 5% less than synchronous.
- The “actual belt speed” displayed in this catalog is based on a lagged pulley running at full load, nominal voltage (e.g. 460 volts) and 60Hz.
- The maximum no load belt speed of this lagged pulley is 5% higher than the full load belt speed.

NOTICE

2) Aftermarket Service

- Always contact your local authorized Rulmeca service center or distributor for aftermarket service.
- Or contact Rulmeca at sales-us@rulmeca.com.

3) Ambient Temperature:

- Motorized Pulleys are normally cooled by dissipating heat through contact between the surface of the pulley and the conveyor belt. It is essential that each pulley have an adequate thermal gradient between the pulley’s motor stator and its ambient operating temperature.
- All Motorized Pulleys in this catalog are designed and tested under full load for use in a max. ambient temperature of +104° F with standard Class F motor. Motorized Pulleys with Class H motors and synthetic oil are suitable for use in a max. ambient temperature of 120° F.
- For example, a conveyor belt in a facility with an air temperature of +75° F, carrying processed material at a temperature of +130° F, will have a Motorized Pulley “ambient temperature” that is significantly higher than +75° F. In this example, the actual temperature of the bottom of the belt in the vicinity of the Motorized Pulley will be less than or equal to the material temperature, depending upon parameters such as conveyor length, belt thickness, and belt speed.
- For ambient operating conditions lower or higher than allowable ambient temperature (-22° F to 120° F), contact Rulmeca.



NOTICE




Technical Precautions for Design, Installation and Maintenance

- All Motorized Pulleys shown in this catalog must be fitted with a conveyor belt to prevent overheating. Motorized Pulleys fitted without a belt must be referred to Rulmeca.
- It is possible to use specially designed Motorized Pulleys to perform tasks other than driving standard rubber conveyor belt (e.g. modular plastic belts and v-belts for Motorized Pulley types 138E & 165E.) Please contact Rulmeca for such applications.
- Operating Rulmeca Motorized Pulleys to drive standard conveyor belts outside of the allowable ambient temperature range voids product warranty.

4) Belt Alignment:

- Motorized Pulleys must be installed with pulley shaft perpendicular to belt centerline and parallel to all idler rollers.
- Belt centerline must be straight and parallel to side walls of slider bed (if any) and perpendicular to idler rollers and all pulleys
- Belt and/or roller misalignment may cause high friction and overload the conveyor belt drive motor.
- Belt misalignment may cause premature wear of pulley lagging.



5) Belt Pull:


- This catalog specifies “Actual Belt Pull” for each model, power, and speed of pulley. Note that the specified actual belt pull allows for a motor and gearbox efficiency loss of 3 to 5%.
- Always select the Motorized Pulley power by comparing calculated “Required Belt Pull (T_e)” with “Actual Belt Pull” as listed in this catalog and not simply on the basis of calculated power (HP).
- Required Belt Pull is the sum of all forces required to convey material.



6) Belt Tension:

- The conveyor belt should never be over-tensioned. It should only be installed with sufficient belt tension to prevent belt slippage.
- Anti-slip lagging should be used to keep the radial load as low as possible to drive the belt without slipping .
- The maximum allowable radial load of each Motorized Pulley is specified in this catalog. Subjecting the Motorized Pulley to a higher than specified maximum radial load may damage internal components and shorten product life-time and, therefore, voids product warranty.
- To check pulley radial load, do a vector summation of the loads on the pulley.
- For example, as shown in the diagram,
 1. Radial load equals $T_1 + T_2$.
 2. T_1 , tight side tension, equals Belt Pull (T_e) plus T_2 .
 3. T_2 , slack side tension, is determined using CEMA historic methodology or DIN 22101 to provide enough friction between the pulley and the belt to drive the belt and limit belt sag between idlers.
- Belt type, belt thickness and minimum allowable pulley diameter must be selected according to Belt Supplier Requirements.

NOTICE



7) Capacitors (for Single Phase Motors):

- Each single phase Motorized Pulley requires an appropriate capacitor. For models 138E and 165E a “Run” capacitor is supplied with the pulley. Detailed information is available upon request. Using other than the specified Run capacitor and a current dependent switching relay may damage the motor and voids product warranty.
- The Run capacitor must be permanently connected to the motor, as shown in the connection diagrams.
- Rulmeca single phase motors are “permanent split phase motors.” Each motor is supplied with two windings. They are designed so that an appropriately sized capacitor connected to one of the windings will start the motor rotating.
- Starting torque is limited to 70% of full running torque when a “Run” capacitor is used.
- It is possible to increase starting torque to 100% by adding a second appropriately sized capacitor (Start capacitor) to the circuit. Note that this circuit must be designed to drop the starting capacitor out of the circuit after the motor has reached its nominal speed. Contact Rulmeca for more information on how to run single phase motors using Start and Run capacitors.



Technical Precautions for Design, Installation and Maintenance

8) Clearance:

- It is necessary to design conveyor frame and all chutes such that structure and/or product jamming against the Motorized Pulley is avoided.
- The “non-rotating shaft” feature of Motorized Pulleys offers a higher margin of safety than exposed drives with rotating shafts. However, Motorized Pulley end housings, lagging, or tube may be damaged if structure or product jams against pulley while it is rotating.

9) Dust Explosion Proof (ATEX 95) Motorized Pulleys:

- The assembly, connection and sealing of the cable for dust proof motorized pulleys marked as follows



must be double checked to avoid any explosion in case of emergencies.



- Make sure that the IP68 cable gland is properly fixed to the terminal box of the Motorized Pulley.
- Make sure that the cable is properly sealed inside the cable gland. Never use a cable gland with a protection rate lower than IP65.

10) Electrical Installation:

- The equipment manufacturer (OEM) must ensure that the Motorized Pulley is not put into operation before it is
 - Correctly installed,
 - Correctly connected to the power supply,
 - Correctly protected.
- A specialist must perform the electrical connection of the Motorized Pulley in accordance with electrical regulations. If in doubt, contact Rulmeca.
- A wiring diagram is always supplied with the Motorized Pulley. Always refer to the connection instructions and ensure that the motor power and control circuits are properly connected.
- A wiring diagram is inserted into the terminal box and into the booklet accompanying each Motorized Pulley.
- Standard Rulmeca Motorized Pulleys are delivered with clockwise rotation when viewed from the terminal box end of the Motorized Pulley.
- Always refer to the connection instructions and ensure that the motor is connected as required to the correct power supply.
- Connect system ground wire to grounding screw located in the terminal box.
- When using cable options the green/yellow wire must be connected to the system ground wire.



Marking of the earth screw



11) Electromagnetic Brake:

- The spring-loaded electromagnetic brake is intended for use as a conveyor belt holding device and not a conveyor belt stopping device.
- The control circuit for the Motorized Pulley motor and brake must be designed to stop the pulley motor before brake clamps shut and start the pulley motor after the brake is released.
- Spring-loaded electromagnetic brakes are designed to release when power is applied to the brake coil. This is a “fail safe” feature. They clamp shut when brake power is removed (either during normal operation or during an emergency loss of overall system power.)
- Control circuit must be designed so that motor and brake never work against each other. The brake should never be clamped shut when the motor is on except for “emergency stop” condition. The motor should never be powered on (including “jog” command) when the brake is clamped shut.
- Electromagnetic brakes are DC-powered. They are supplied with AC to DC rectifiers to be mounted in a remote panel (by others). Rectifiers must be fuse-protected.

NOTICE




Technical Precautions for Design, Installation and Maintenance

- Motor control circuit must be designed to kill motor power in the event of loss of brake power. If this safety provision is not made, it is possible for pulley motor to be “powered through” a clamped brake, burning brake and/or motor.
- A wiring diagram is supplied with every Motorized Pulley. Always ensure that motor and brake power and control circuits are connected according to instructions. Wiring diagrams are available separately, at any time, upon request.
- For rectifier connection and protection instructions, refer to rectifier data sheet supplied with Motorized Pulley.
- Neglecting these instructions could cause damage to the motor and/or brake and voids product warranty.

12) Guarding and Lock Out/Tag Out:

- If repair or maintenance is required, the Motorized Pulley must be disconnected from the power supply before the terminal box can be opened. Turn the electrical power off at the electrical panel board (circuit breaker or fuse box) and lock and tag the panel board door to prevent someone from turning on power while unit is being serviced. Failure to do so could result in serious electrical shock, burn, or possible death.
- During a test run, the shaft ends must be correctly fixed to the support frame, and suitable guarding must be provided around the rotating parts for the protection of all personnel.

WARNING: DO NOT operate without guards in place. Failure to follow these instructions could result in death or serious injury.



13) High Duty Cycle:

- Rulmeca Motorized Pulleys are designed to operate either continuously or intermittently. Page 78 gives each standard model’s maximum allowable start/stop duty cycle for intermittent operation. Operating Motorized Pulley above this maximum could cause motor and/or gearbox damage and voids product warranty.
- Optional Motorized Pulley designs are available to operate at higher duty cycles working with soft start devices or appropriately programmed Variable Frequency Drives. Contact Rulmeca before designing a system to operate at a duty cycle higher than specified in this catalog.
- Note that a conveyor control system that incorporates a “jog” command should be timed to restrict the number of jogs to the maximum allowable start/stop duty cycle for each pulley model.

14) Lagging Description:

- Smooth and diamond pattern lagging is available in black synthetic rubber and white synthetic rubber. Approximate rubber hardness is 65 durometer +/- 5 (shore hardness A).
- Standard lagging is cold-bonded to pulley shell.
- Optional hot vulcanized lagging is available for high power/high torque/high temperature applications.
- Oil & grease resistant synthetic rubber is also available for oily operating conditions and/or certain types of belting material. Check with belting supplier if belt/lagging material compatibility could be a problem.
- Adequate Motorized Pulley heat dissipation is necessary. Lagging thickness and width greatly effect pulley heat dissipation characteristics.
- As shown in Lagging Limitations table above, certain power and belt speed combinations require that rubber lagging be restricted to the outer thirds of the pulley face to improve heat dissipation. Each “partially lagged” pulley has a thick steel shell in the center (unlagged) third of the pulley face.
- Contact Rulmeca before applying any lagging to pulley surface to obtain thickness and width specifications and maintain Motorized Pulley warranty coverage.
- Lagging material is a wear item and should be replaced when it wears out. Service life depends upon the application. Product warranty does not include lagging wear.
- At any time all Rulmeca Motorized Pulleys shown in this catalog must be fitted with a conveyor belt to prevent overheating. Motorized Pulleys fitted without a belt must be referred to Rulmeca.

NOTICE



Technical Precautions for Design, Installation and Maintenance

15) Lagging Limitations*:

Motorized Pulley model/power and belt speed (if applicable)	RL (in)	Full Cold bonded 0.118"	Full Cold bonded 0.236"	Full Hot vulc. 0.236"	Full Cold bonded 0.315"	Partial Hot vulc. 0.315"	Full Cold bonded 0.394"	Full Hot vulc. 0.394"	Partial Cold bonded 0.394"	Partial Hot vulc. 0.394"	Full Cold Ceramic/rubber 0.394"	Partial Cold Ceramic/rubber 0.394"	Full Solid Ceramic 0.394"
138LS													
≤ 0.5 HP		x	o	o	-	-	-	-	-	-	-	-	-
0.75 & 1.0 HP	<23.62	x	o	-	-	-	-	-	-	-	-	-	-
0.75 & 1.0 HP	≥23.62	x	o	-	-	-	-	-	-	-	-	-	-
0.75 & 1.0 HP ≥ 120 fpm	≥23.62	x	o	o	-	-	-	-	-	-	-	-	-
165LS													
≤ 1.0 HP		x	o	o	-	-	-	-	-	-	-	-	-
1.5 & 2 HP	<23.62	x	o	-	-	-	-	-	-	-	-	-	-
1.5 & 2 HP	≥23.62	x	o	o	-	-	-	-	-	-	-	-	-
1.5 & 2 HP ≥ 240 fpm	≥23.62	x	o	o	-	-	-	-	-	-	-	-	-
220M & 220H													
≤ 2 HP		-	x	-	-	-	-	-	-	-	-	-	-
3 & 4 HP	<31.50	-	x	-	-	-	-	-	-	-	-	-	-
3 & 4 HP	≥31.50	-	x	-	-	-	-	-	-	-	-	-	-
5.5 HP	<27.56	-	-	x	-	-	-	-	-	-	-	-	-
5.5 HP	≥27.56	-	x	-	-	-	-	-	-	-	-	-	-
7.5 HP	<33.46	x	-	-	-	-	-	-	-	-	-	-	-
7.5 HP	≥33.46	-	x	-	-	-	-	-	-	-	-	-	-
320L - 320H													
≤ 7.5 HP		-	-	-	x	-	-	-	-	-	o	-	o
10 HP	<39.37	-	-	x	-	-	-	-	-	-	-	-	o
10 HP	≥39.37	-	x	-	-	-	-	-	-	-	-	-	o
400L													
400M & 400H													
≤ 15 HP		-	-	-	x	-	-	-	-	-	o	-	o
20 HP < 300 fpm	< 51.18"	-	-	-	-	x	-	-	-	-	-	-	o
20 HP ≥ 300 fpm	≥ 51.18"	-	-	-	x	-	-	-	-	o	o	-	o
500L & 500M													
500H													
≤ 25 HP		-	-	-	-	-	x	-	-	-	o	-	o
30 HP		-	-	-	-	-	-	-	o	x	-	o	o
40 HP		-	-	-	-	-	-	-	-	-	-	o	x
630M													
630H													
30 HP		-	-	-	-	-	x	o	-	-	o	-	o
40 HP < 300 fpm		-	-	-	-	-	-	-	-	x	-	o	o
40 HP ≥ 300 fpm		-	-	-	-	-	-	-	o	x	-	o	o
50 HP		-	-	-	-	-	-	-	-	x	-	o	o
61 HP	< 51.18"	-	-	-	-	-	-	-	-	x	-	-	o
61 HP	≥ 51.18"	-	-	-	-	-	-	-	o	x	-	o	o
75 HP		-	-	-	-	-	-	-	-	x	-	o	o
800M													
800H													
61 HP		-	-	-	-	-	x	-	o	o	-	o	o
75 HP		-	-	-	-	-	-	-	-	x	-	o	o
800H													
75 HP	< 51.18"	-	-	-	-	-	-	-	-	x	-	o	o
75 HP	≥ 51.18"	-	-	-	-	-	-	x	o	x	-	o	o
100 HP	< 51.18"	-	-	-	-	-	-	-	-	x	-	o	o
100 HP	≥ 51.18"	-	-	-	-	-	-	-	o	x	-	o	o
122 & 150 & 180 HP		-	-	-	-	-	-	-	-	x	-	o	o
1000HD													
		-	-	-	-	-	-	-	-	-	-	-	x

* Lagging code: "x" = standard, "o" = optional, "-" = not available.

16) Mechanical Backstops:

- Motorized Pulleys fitted with mechanical backstops are used on inclined conveyors to prevent run back of the loaded belt when power supply is off.
- The backstop is built into the Motorized Pulley and is mounted on the rotor shaft.
- If pulley is supplied with optional mechanical backstop, direction of proper rotation of pulley is indicated by an aluminum arrow or plastic sticker fastened to the end housing on the terminal box (or power cord) side of the pulley. Clockwise and counterclockwise backstops are available.
- Rotation direction is to be specified when placing the order.
- Pulley rotation is specified from the point of view of a person looking at the pulley from the terminal box (or power cord) side of the pulley.





Technical Precautions for Design, Installation and Maintenance

- It is essential that the identity of each of the three phases of the power supply be determined before attaching power supply wires to the pulley to prevent the motor from driving against the backstop. The identity of each of the three phases of the motor is clearly labeled on the terminal board, terminal strip, or wires (in power cord type).
- Driving the motor against the mechanical backstop may damage motor and/or backstop and voids product warranty.

17) Motor Current Overload and Overcurrent Protection:

- Motor control system must include protection against operating pulley motors in excess of Full Load Amperage (FLA.). The control system should also include protection against voltage spikes and excessive jogging of motors. Failing to provide adequate current overload and over current protection could stress the motor and voids product warranty.
- Electrical connection diagrams for many models are included in this catalog. Connection diagrams for all other models are available upon request.
- FLA data is available for all motors upon request. FLA data is also supplied on motor label for each Motorized Pulley.
- Electrical power, control, and protection for Motorized Pulleys must adhere to all pertinent regulations.

NOTICE


18) Motor Thermal Protection:

- All Motorized Pulley motors are supplied with built-in thermal protection. Protection consists of heat-sensitive, bi-metallic switches built into each motor phase winding. The switches are designed to open if motor temperature elevates to an inappropriately high level. Whether insulation class “F” or “H”, our standard bi-metallic switch
 - has a maximum current limit of 2.5 amps at 230 volts.
- These switches must be connected to a normally closed control circuit (in series with a magnetic coil/relay device and contactor) in order to validate product warranty.
- A motor control circuit should kill motor power if thermal switch opens. Thermal switches will automatically close as motor cools. Cooling times vary with pulley model, power, and size. However, 30 to 60 minutes is common with most motors in an ambient temperature of 70° F.



19) Motorized Pulley Mounting Orientation:

- Before installing the Motorized Pulley, ensure that the data plate information agrees with your specification.
- Rulmeca Motorized Pulleys should always be mounted so that the pulley shafts are
 1. Horizontal,
 2. Parallel to idler rollers, and
 3. Perpendicular to the conveyor belt centerline.
- Motorized Pulleys are positioned such that the mounting brackets are located parallel or perpendicular to the conveyor frame. If Motorized Pulley needs to be mounted to the bottom of a horizontal beam, contact Rulmeca.
- For Motorized Pulley types 138LS to 500M “UP” is indicated with the word “UP” stamped on the pulley shaft.
- **Models 138LS - 500M** are to be mounted as shown on the sketch below.

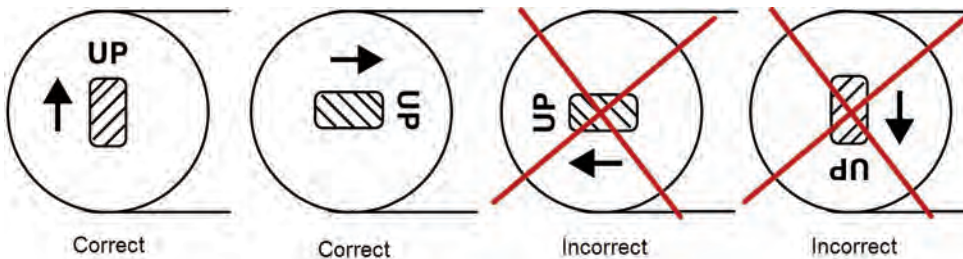


NOTICE




Technical Precautions for Design, Installation and Maintenance

- **Models 500H - 1000HD** are to be mounted as shown on the sketch below.

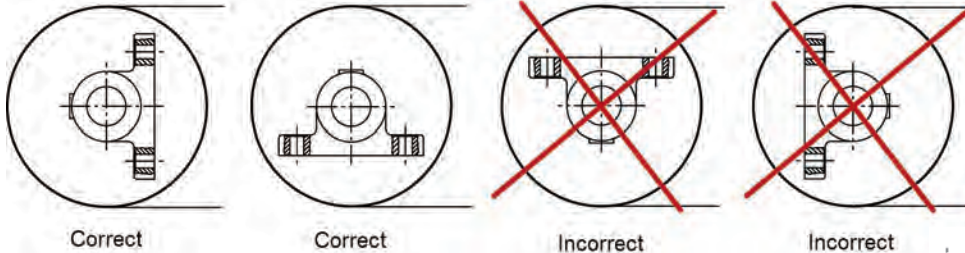

NOTICE



- In case of a non-horizontal installation, of more than ± 5 degrees, consult Rulmeca.
- Installation and mounting of the Motorized Pulley in a position other than those described above could cause severe product damage and voids product warranty.

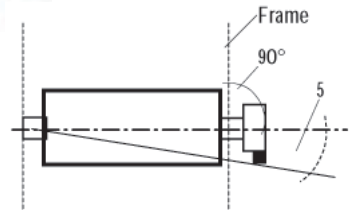

20) Mounting Brackets:


- Use the correct Rulmeca mounting brackets matching the respective types of Motorized Pulleys as listed in this catalog.
- Note that it is physically possible, but not permissible, to interchange mounting brackets between models. Mounting brackets designed for smaller diameters or lower-powered pulleys may not be used for larger diameters or higher-powered pulleys.
- Mounting brackets must be mounted to frame such that belt pull is resisted by the shoulder or base of the mounting bracket. Motorized Pulleys types 138E to 500M have a top shaft retaining plate. This plate is not designed to resist belt pull.

NOTICE

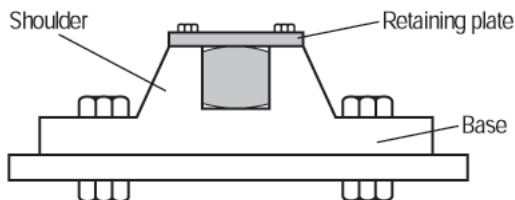


NOTICE

- The designer must select appropriate mounting bolts to resist belt forces and/or the weight of the pulley depending on the mounting position of the Pulley.
- All types of mounting brackets must be fully supported by and fastened to the conveyor frame such that the shafts ends do not deform. Shaft ends must always be fully supported by the brackets.
- Where solid mounting brackets type AL and ALO are used, the brackets must be assembled close to the shoulder of the round shaft. This is to ensure that the Motorized Pulley has no axial clearance.
- The AL type of bracket is fitted with one or two keys depending on load.
- Keys must be securely fixed and checked regularly and locked if necessary.
- Mounting brackets should be fitted such that they are in contact with the shoulder of each shaft. This will:
 1. Eliminate Motorized Pulley axial play between mounting brackets.
 2. Keep shaft deflection to a minimum.



NOTICE

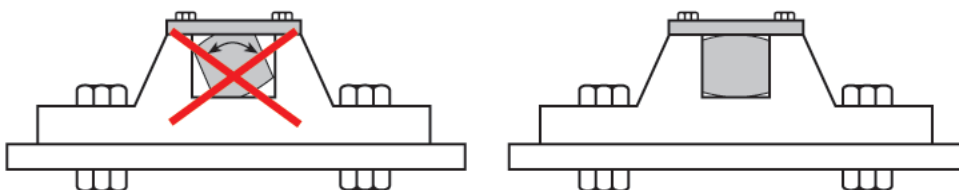



Technical Precautions for Design, Installation and Maintenance

- In noise-sensitive areas, the designer should use heavier gauge support structure and appropriate vibration isolating material, as necessary.
- When Rulmeca Motorized Pulley mounting brackets are not used, it is essential that:
 1. The mounting equipment supports at least 80% of the shaft flats.
 2. The clearance between each shaft flat shoulder and its support is less than 0.030 inches.
- A Motorized Pulley with frequent reversible operations or many start/stops should be mounted with no axial clearance between the shaft flat and the brackets.
- Failing to follow these precautions could cause pulley and/or bracket damage and voids product warranty.

NOTICE


21) **Non-Belt, Partial Belt, Modular Belt:**

- Special Motorized Pulley designs are available for “non-belt, V-belt, partial belt, and modular belt” applications. See “Ambient Temperature Section” above.
- It is essential that each special application be designed to adequately dissipate heat from the pulley surface.
- Using a standard Motorized Pulley in one of these special applications could result in motor heat damage and voids product warranty.
- Contact Rulmeca for assistance with these applications.

NOTICE

22) **Oil and Oil Seal Maintenance:**

- All Motorized Pulleys are supplied with an appropriate quantity of oil. Oil type is specified by customer. Oil type and quantity are given on the motor nameplate.
- Standard, synthetic, food grade, low viscosity (for low temperature applications,) and high viscosity (in noise-sensitive areas) are all available. For approved oil types and quantities, see pages 92-93.
- Motorized Pulleys require periodic oil changes and are supplied with two oil fill/drain plugs in end housing. Special “vertical mount” pulleys have four oil plugs (two in each end housing.)
- Mineral oil should be changed after each 20,000 operating hours under normal operating conditions.
- Synthetic oils should be changed after each 50,000 hours of normal operating condition.
- Magnetic oil plug(s) should be cleaned during each oil change. A red dot plastic sticker indicates the position of the magnetic oil plug.
- Only approved non-conductive oil may be used in Motorized Pulleys.
- Note that oil seals, regardless of oil type used, should be changed after 30,000 operating hours. On Motorized Pulley types 320M to 1000HD oil seals may be changed without removing Motorized Pulley from conveyor. Motorized Pulley standard types 138E to 320L require Pulley disassembly to change oil seals. Rulmeca service personal or authorized local service providers to perform this work.
- Take special precautions when changing brands of oil and types of oil because of potential oil incompatibility. Contact your local oil supplier for assistance.



For example, when changing from standard to synthetic oil, it is necessary to:

1. Completely drain old standard oil;
 2. Partially fill pulley with “Clean-Flush-Lubricate” (CFL) fluid;
 3. Run pulley for 20 minutes;
 4. Drain CFL fluid completely; then
 5. Fill pulley with appropriate amount of new synthetic oil.
- Failing to observe these oil & oil seal precautions could shorten pulley service life and voids product warranty.
 - All the above instructions refer to Motorized Pulleys constantly working under full load. In case of Motorized Pulleys not working continuously under full load, the service life will increase considerably. When checking the oil, the cleanness of the oil is always the best guideline of
 - The wear and condition of the gears and bearings
 - Whether to change the oil immediately or possibly delay the oil change

NOTICE

23) **Pulley Diameter:**

- The type and size of conveyor belt will determine the minimum allowable Motorized Pulley diameter. Using a pulley diameter too small for the belt can cause belt de-lamination, belt splice damage and can shorten both belt and pulley lagging life. Contact your belting supplier before specifying a pulley diameter.



Technical Precautions for Design, Installation and Maintenance

24) **Regreasable Labyrinth Seals:**

- All Rulmeca Motorized Pulleys are hermetically sealed. Standard oil seals are designed to contain oil within the Motorized Pulley during normal operating conditions. They are capable of withstanding an internal pressure rise that occurs as the pulley motor temperature increases.
- Optional regreasable labyrinth seals are available to protect oil seals from harsh operating or maintenance conditions. Each labyrinth seal provides a barrier of steel and grease to prevent ingress of dust and fluid through the oil seal.
- In abrasive operating conditions labyrinth seals should be periodically grease-purged to flush abrasive dust away from the oil seal.
- In wet conditions, where it is common to wash down equipment with high-pressure detergent spray, labyrinth seals should be refilled with grease after each wash-down. High-pressure sprays remove grease from the labyrinth seal, removing an important part of the barrier to fluid ingress.
- Grease should always be seen at the labyrinth gap.
- If in some circumstances the re-grease frequency is high, an automatic greasing system is recommended.
- Failing to perform proper labyrinth seal maintenance could shorten service life and voids product warranty.

25) **Reversing Conveyors:**

- All Motorized Pulleys for a three-phase power supply are reversible. Mechanical backstop option is not possible for reversible conveyor applications.
- The conveyor drive control system must be designed to bring the Motorized Pulley to a complete stop before reversing conveyor belt direction.
- Reversing conveyor direction without stopping the drive motor will damage motor and gearbox and voids product warranty.

NOTICE

26) **Surface Coating:**

- Motorized Pulley models 400L to 800H are supplied with a standard salt water resistant primary paint coat of 2.4 mil. For aggressive environmental conditions the Motorized Pulley should also be painted to a thickness of 4.7 mil.
- In this case it is essential that no paint enter the gap between the shaft and the end housing to prevent shaft sealing damage.
- Motorized Pulley types 138E to 320H are supplied with powder coated end housings. The shells and shafts are treated with anti-rust wax.

NOTICE

27) **Storage of Motorized Pulleys:**

- During storage Rulmeca Motorized Pulleys must be:
 - stored in a building or, as a minimum, covered by an awning.
 - protected against direct sunlight to insure that sealing system does not dry out.
 - rotated at least 180 degrees every 6 months to lubricate all internal components.
- If Motorized Pulleys must be stored longer than 1 year, they must be tested before being put into operation. Such a test should include the following.
 - Motor winding should be checked with an insulation tester.
 - Winding resistance should be checked.
 - Thermal protector should be checked with a continuity tester.
 - Pulley should be connected to the power supply and run for a minimum of 30 minutes
 - Pulley should then be checked to verify that there are no oil leaks
 - Pulley should then be checked to verify that pulley body temperature does not exceed 160° F.
- For safety reasons check that the Motorized Pulley is properly fixed to the test frame during the test.

28) **Start-up:**

- Prior to initial start-up of Motorized Pulley:
 1. Verify that nameplate data matches customer specification.
 2. Ensure electrical connections are correct.
 3. Verify that Motorized Pulley is free to rotate.
 4. Verify belt is not overtightened.
 5. Verify Oil is present in the Motorized Pulley.
 6. Verify slack side belt tension is adequate.



Technical Precautions for Design, Installation and Maintenance

29) Terminal Box:

- Motorized Pulleys are available with terminal boxes or power cords. Power cords are available for motor power ≤ 5.5 HP.
- Two types of terminal box are available:
 1. Standard large terminal box with threaded brass terminals.
 2. Optional compact t'box with clamp terminals for power ≤ 5.5 HP.
- Switch off power supply & control circuit(s) before opening t'box.
- Each terminal box has one or more conduit nipples and a cover plate. Cover plate should be removed to terminate power and control wires within the t'box. After wire connections are made cover plate should be replaced.
- Terminal boxes should never be disassembled or removed from the end of the shaft.
- Modifications to terminal boxes should only be made by an authorized Rulmeca service center or after obtaining permission and instructions, in writing, from Rulmeca.
- A wiring diagram is inside the terminal box on the back of the terminal box cover.
- Dismantling and reassembling a terminal box could cause a short circuit in the factory set (and tested) internal wiring and voids product warranty.
- Torque ratings for t'box lugs are presented in this table.

Model / Lug	Power	Thermal Protection
220 & 320	18 in-lbs	18 in-lbs
400 & 500	27 in-lbs	27 in-lbs
630	53 in-lbs	18 in-lbs
800	134 in-lbs	18 in-lbs



Stan. t'box 220 -320



Compact t'box
138 - 165



T'box cover with
wiring diagram



Stan. t'box 400-630M



Stan. t'box 630H-800HD

30) Transport and Handling:

- A lifting sling/rope suitable to support the pulley must fixed on the shaft ends. The pulley weight is stamped on the data plate and/or given in the catalog.
- For Motorized Pulley types 500H – 1000HD, a steel rope or chains should be fixed to the eyebolts, which are located on the mounting brackets.



31) Variable Frequency Drive:

- It is essential that each Variable Frequency Drive (VFD) be set within the motor's allowable operating frequency spectrum. This is to insure proper cooling of the motor. If operators attempt to drive the motor outside of the allowable range, then motor cooling can become problematic, and product warranty is void.
- When driving Rulmeca Motorized Pulleys with "old" analog VFDs, the allowable frequency spectrum is 12 Hz to 66 Hz. There will be no more than 5% torque loss within this range with these devices, meaning a Rulmeca Motorized Pulley may be set to deliver essentially "constant torque" within the allowable frequency range. However, do not undersize the conveyor drive when configured in this manner, making certain the conveyor drive provides enough belt pull at each end of the desired belt speed range. Remember that horsepower is linearly proportional to frequency.
- When driving Rulmeca Motorized Pulleys with newer flux vector VFDs, the allowable frequency spectrum may be extended. Frequencies < 12 Hz and > 66 Hz are possible, depending on various parameters including but not limited to ambient temperature, nominal belt speed, and required belt pull. Contact Rulmeca for assistance.
- Do not allow resonant frequencies in the power line to cause voltage spikes in the motor. It is possible for certain brands of VFD to set up resonant frequencies in the power line between the VFD and the motor if the power line is too long. Potential resonant frequencies may be eliminated as follows: (1.) limit the distance between the VFD and the motor (some VFD manufacturers recommend cable lengths of 30 feet or less), (2.) install a filter on the VFD output (available from VFD manufacturer), and/or (3.) select a VFD which modulates pulse width in a manner so as to avoid resonance.
- To avoid any radio interference the cable from motor to the VFD may be screened and properly grounded.
- The power and current range of the VFD must be selected according to the full load amperage given on the Motorized Pulley data plate.
- Contact VFD supplier to properly match the VFD capabilities with the conveyor operating requirements and Motorized Pulley electrical characteristics.

NOTICE





Motorized Pulleys Checking and Changing Oil



How to Check Oil Level

The type and quantity of oil contained in each Rulmeca Motorized Pulley is specified on the product name plate. Pages 92 and 93 show the types and quantities available. All Rulmeca Motorized Pulleys are built with two drain holes in the end housing. To check the pulley's oil quantity, rotate the holes to the four o'clock and ten o'clock positions, as shown, and remove the plug from the lower hole. Use a clean strip of wood or cardboard to serve as a "dip stick" and insert it into the hole. The stick should indicate that the oil level is even with the bottom of the hole

Technical Precaution: When checking oil in a Motorized Pulley which is installed in the conveyor structure, use your plant's lock-out tag-out safety procedures and mechanically prevent the pulley from rotating during the test.



How to Take Oil Sample

To take an oil sample, rotate the oil holes as described above, remove the lower plug, and use a manual oil sucker (see photo) or a pump. This will enable a tribology technician to assess the quality of the oil and make a prediction of when the oil should be changed.

Technical Precaution: When taking an oil sample from a Motorized Pulley which is installed in the conveyor structure, use your plant's lock-out tag-out safety procedures and mechanically prevent the pulley from rotating during the test.



How to Remove Motorized Pulley Oil

To remove oil from a Rulmeca Motorized Pulley rotate the pulley so that the oil holes are located in the six o'clock and twelve o'clock positions, place a bucket beneath the lower hole, then remove both plugs, allowing all oil to drain.

Technical Precaution: When removing oil from a Motorized Pulley which is installed in the conveyor structure, use your plant's lock-out tag-out safety procedures and mechanically prevent the pulley from rotating during the test.



How to Refill Motorized Pulley with Oil


To refill a Rulmeca Motorized Pulley with oil, wipe off all sludge from each magnetized oil plug, wrap the plug threads with thread tape (see photo), replace the plug in the hole at the six o'clock position, then add the appropriate quantity of oil through the hole at the twelve o'clock position. Either an oil pump (see photo) or a bucket and funnel may be used to refill the oil.

Technical Precaution: Always check the name plate on the pulley terminal box prior to replacing the oil to insure that the correct oil type and quantity is used. When changing the type of oil after the old oil has been removed, it is necessary to add and then remove a clean-flush-lubricate (CFL) liquid prior to adding the new and different oil. When in doubt, contact your oil supplier.



Precautions for Design, Installation and Maintenance

32) Oil Quantities in Quarts for Standard Motorized Pulleys in Horizontal Applications



Quarts


RL (in.)	138LS	165LS	220M & 220H		320L	320M & 320H			400L	400M & 400H		500L & 500M all	500H	630M	630H	800M	800H & 800HD all	1000HD
	all	all	0.5 HP to 2.0 HP	3.0 HP to 7.5 HP		1 HP to 4 HP	5.5 HP to 7.5 HP	10 HP to 15 HP		3 HP to 15 HP	20 HP							
11.81	0.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
13.78	1.0	1.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
15.75	1.2	1.5	3	-	7	-	-	-	-	-	-	-	-	-	-	-	-	-
17.72	1.4	1.7	4	7	7	-	-	-	-	-	-	-	-	-	-	-	-	-
19.69	1.6	1.9	4	7	8	4	8	13	17	-	-	-	-	-	-	-	-	-
21.65	1.9	2.1	5	8	8	4	9	14	18	-	-	-	-	-	-	-	-	-
23.62	2.1	2.4	5	8	9	4	9	15	19	14	22	-	11	-	-	-	-	-
25.59	2.3	2.6	6	9	10	4	10	16	21	16	23	22	11	-	-	-	-	-
27.56	2.5	2.8	6	9	10	5	10	17	22	17	25	23	12	-	-	-	-	-
29.53	2.7	3.1	7	10	11	5	11	17	23	18	26	24	12	29	-	-	-	-
31.50	3.0	3.3	7	10	11	6	11	18	25	19	27	25	13	30	-	-	-	-
33.46	3.2	3.5	7	10	12	6	12	20	26	20	29	26	13	31	-	-	-	-
35.43	3.4	3.7	7	10	13	6	13	21	27	21	30	27	14	32	-	-	-	-
37.40	3.6	3.9	8	11	14	7	14	22	29	22	31	30	15	34	54	65	-	-
39.37	3.8	4.1	8	11	15	7	15	23	31	24	35	32	16	36	56	68	-	-
41.34	3.8	4.3	8	11	15	7	16	24	33	25	36	33	16	38	57	70	-	-
43.31	4.0	4.6	8	11	16	7	17	25	34	26	39	34	17	40	60	73	-	-
45.28	4.2	4.9	9	12	17	8	18	27	36	27	40	36	18	42	62	75	-	-
47.24	4.4	5.1	9	12	19	8	19	29	38	29	42	38	19	44	64	77	-	-
49.21	4.6	5.3	9	12	20	9	20	30	39	30	43	39	19	46	66	79	-	-
51.18	4.9	5.5	9	12	21	9	21	31	40	31	44	40	20	48	68	80	137	-
53.15	5.1	5.7	10	13	22	10	22	33	42	32	47	42	21	49	70	82	141	-
55.12	5.3	5.9	10	13	23	10	23	35	44	34	49	44	22	51	72	84	143	254
57.09	5.4	6.1	10	13	24	11	24	36	46	35	51	45	23	52	74	86	145	257
59.06	5.6	6.3	11	14	25	12	25	38	47	36	52	47	23	53	76	88	148	259
61.02	5.1	6.1	11	14	26	13	26	40	48	37	54	49	24	54	78	90	150	262
62.99	5.3	6.3	11	14	27	14	27	42	49	38	55	51	25	56	80	93	153	266
64.96	5.4	6.6	12	15	28	15	28	43	51	39	57	53	26	57	83	95	156	269
66.93	5.6	6.8	12	15	29	16	29	44	52	40	59	55	27	58	85	97	159	273
68.90	5.8	7.0	13	16	30	17	30	45	53	41	61	57	28	60	87	99	161	277
70.87	5.9	7.2	14	17	31	18	31	47	56	43	64	59	30	61	89	101	164	280
72.83	-	7.4	14	17	32	19	32	49	59	45	65	63	31	63	91	104	166	283
74.80	-	7.6	15	18	33	20	33	52	61	47	68	68	33	64	93	106	169	287
76.77	-	7.8	16	19	34	21	34	54	62	48	69	72	36	65	95	108	171	291
78.74	-	8.0	17	20	35	22	35	56	64	49	70	76	38	66	97	110	173	294

Note: The oil quantities shown above are valid for standard lagged Motorized Pulleys. For special options (e.g. certain types of special lagging, high duty cycle applications, etc) oil quantities may vary. Therefore, always refer to oil quantity listed on motor data plate or contact Rulmeca.



Precautions for Design, Installation and Maintenance

32) Oil Quantities in Quarts for Motorized Pulleys in “Special Vertical Shaft” Applications




Note: Motorized Pulley shaft is perpendicular to horizontal plane.

Model	Oil Quantity Quarts	Specifications
138LS	1.5	Electrical connection to be located at the top
165LS	3.2	
220M	10.6	
220H	10.6	
320L	26.4	
320M	26.4	
320H	26.4	
400L	42.3	

Note:

The oil quantities shown are valid for standard vertical Motorized Pulleys. For special options (e.g. certain types of lagging, high duty cycle applications, etc) oil quantities may vary. Therefore, always refer to oil quantity listed on motor data plate.

32) Oil Quantities for “Special Inclined Shaft” Motorized Pulleys - Contact Rulmeca



Note: Motorized Pulley shaft is inclined more than 5 degrees above horizontal plane.

Model	Inclination Angle (α)	Typical applications	Precautions
138LS & 165LS 220M & 220H 320L, 320M & 320H 400L	5° to 90°	Magnetic Separators and Induction Conveyors	Special design & special oil quantity. Contact Rulmeca before placing order.

33) Oil Specifications



Motorized Pulley Model and Type of Oil	Motor Insulation Class	Allowable Ambient Temperature ¹	ISO 3498 Viscosity Grade ⁴	DIN 51517-3 Performance Requirements	Castrol	BP	ESSO	Mobiloil	Shell	Texaco
Ø138-1000 Standard Oil	F	-13°F to +104°F	150	CLP	ALPHA SP 150	ENERGOL GR-XP 150	SPARTAN EP 150	MOBILGEAR 629	OMALA 150	MEROPA 150
Ø138-1000 Synthetic Oil ²	F	-13°F to +104°F	220	CLP	ALPHA-SYNTH 220	-	SPARTAN Syn. EP 220	SHC 630	-	-
Ø138-1000 Synthetic Oil ²	H	-13°F to +120°F	220	CLP	ALPHA-SYNTH 220	-	SPARTAN Syn. EP 220	SHC 630	-	-
Ø138-1000 Food Grade Oil ³	F & H	-22°F to +104°F	220	-	-	-	-	-	Shell Cassida GL220	-

1 Allowable ambient temperature refers to temperature in the vicinity of Motorized Pulley. See Technical Precautions pages 81-82.

2 Synthetic oil is supplied with all Class H motors. It is also available with Class F motors to reduce oil change frequency (see page 88), reduce gear wear, and reduce noise.

3 This oil complies with food additive regulation 12 CFR.

4 ISO Viscosity Grades are shown in centistokes at +104°F. See also ISO 3498 and DIN 31519 for more information.



Precautions for Design, Installation and Maintenance

34) Connection Diagrams for Motorized Pulleys

Standard Terminal Box 0.5 HP - 180 HP

USA standard for models 138LS - 400H
460V power supply (230V also available)


Diagrams are valid for Motorized Pulleys manufactured after January 2011. For units built prior to this date contact Rulmeca or refer to Repair and Maintenance Guide available at sales-us@rulmeca.com.

T1 & T2= Internal bi-metallic thermal protection switch which MUST BE CONNECTED to external normally closed control circuit.


Optional for models 630H-800HD:
T1 & T2 = internal temperature sensor (either PT100 or PTC) which must be connected to appropriate control architecture instead of normally closed control circuit.

See page 101 for optional models with internal temperature sensor and thermal protection switch.

See Technical Precautions pages 89-90 for complete electrical design, installation, and maintenance instructions.

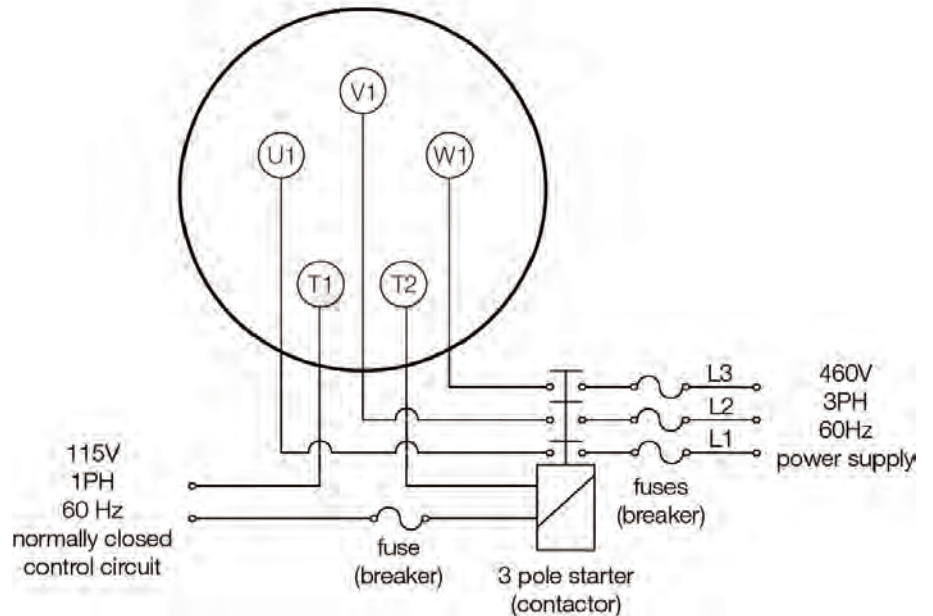

USA standard for models 500H - 800HD
460V power supply

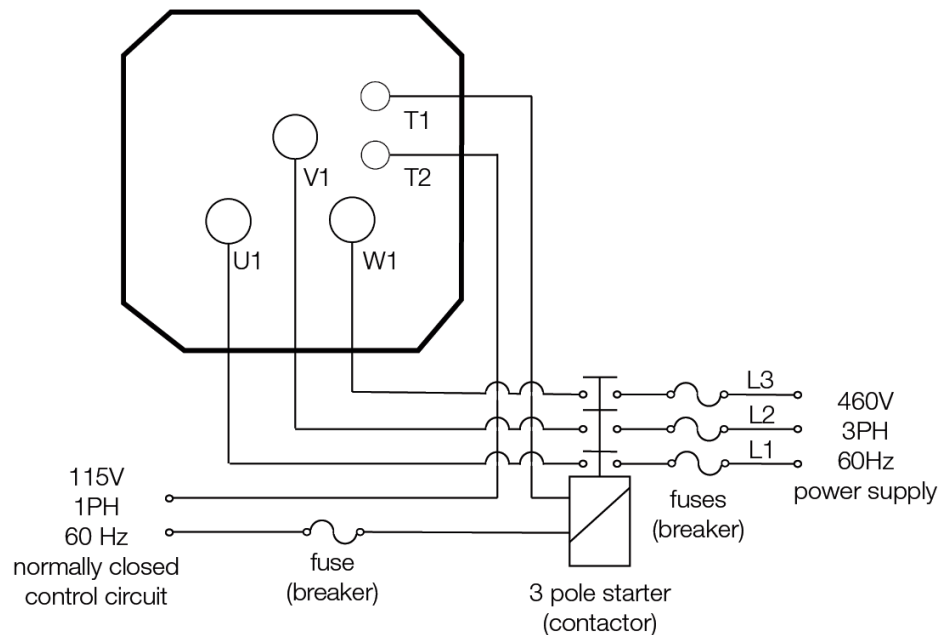



Precautions for Design, Installation and Maintenance

34) Connection Diagrams for Motorized Pulleys with Internal Brake

Standard Terminal Box 0.5 HP - 20 HP



Diagrams are valid for Motorized Pulleys manufactured after January 2011. For units built prior to this date contact Rulmeca or refer to Repair and Maintenance Guide available at sales-us@rulmeca.com.

T1 & T2= Internal bi-metallic thermal protection switch which MUST BE CONNECTED to external normally closed control circuit.

See Technical Precautions pages 80-90 for complete electrical design, installation, and maintenance instructions.

Brake rectifier is shown with jumper across terminals 3 and 4. This enables AC power supply to rectifier to stop and start brake. Brake responsiveness may be improved by connecting an external switch to terminals 3 and 4.

Internal electromagnetic brake is available in models 220M - 500M.

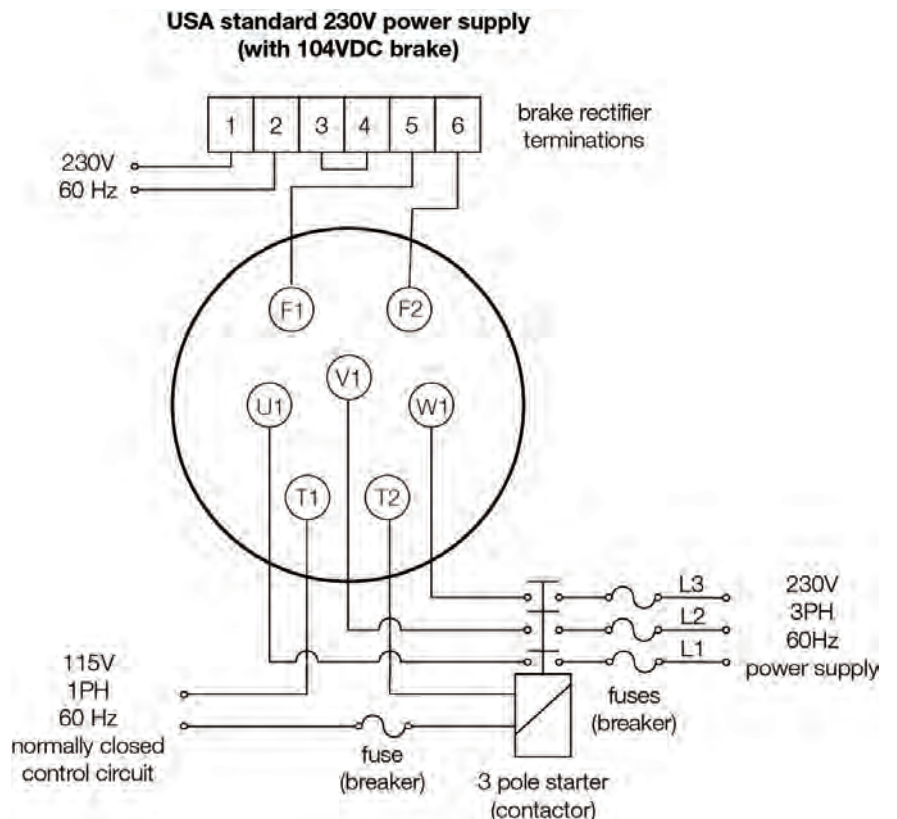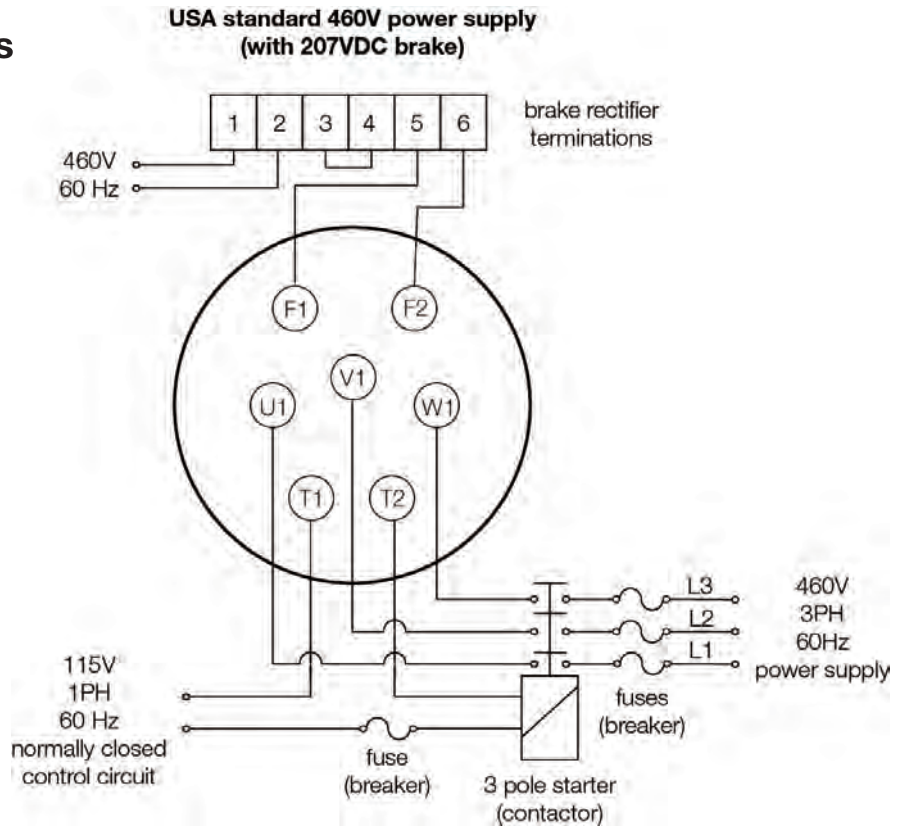



Precautions for Design, Installation and Maintenance

34) Connection Diagrams for Motorized Pulleys

Model 138LS - 400L in 3 phase Power Cord 0.13 HP - 5.5 HP

Model 138LS in 1 phase Power Cord 0.13 HP - 0.75 HP

Power cord wires are supplied with black insulation and white numbers. Wire numbers are indicated on the diagram.

T1 & T2= Internal bi-metallic thermal protection switch which **MUST BE CONNECTED** to external normally closed control circuit.



EB = electromagnetic brake

See Technical Precautions pages 80-90 for complete electrical design, installation, and maintenance instructions.

Brake rectifier is shown with jumper across terminals 3 and 4. This enables AC power supply to rectifier to stop and start brake. Brake responsiveness may be improved by connecting an external switch to terminals 3 and 4.

For two speed motor details contact Rulmeca.

Internal electromagnetic brake is available in models 138LS - 500M.

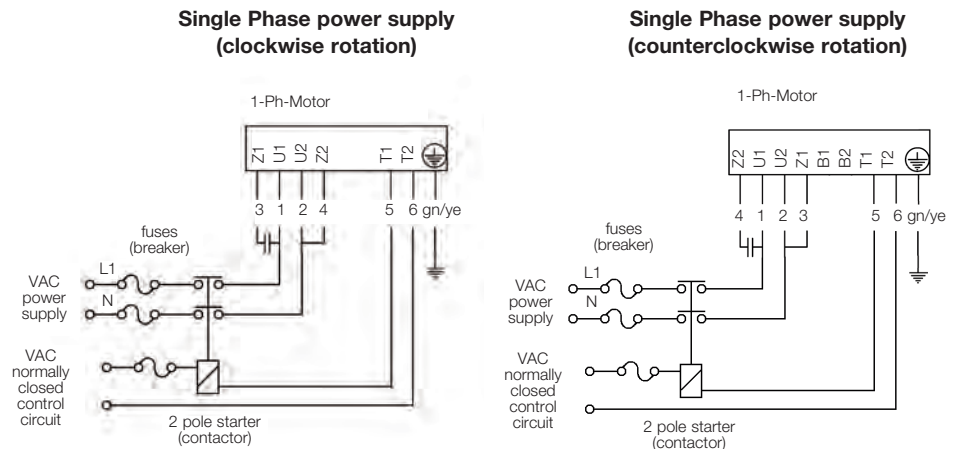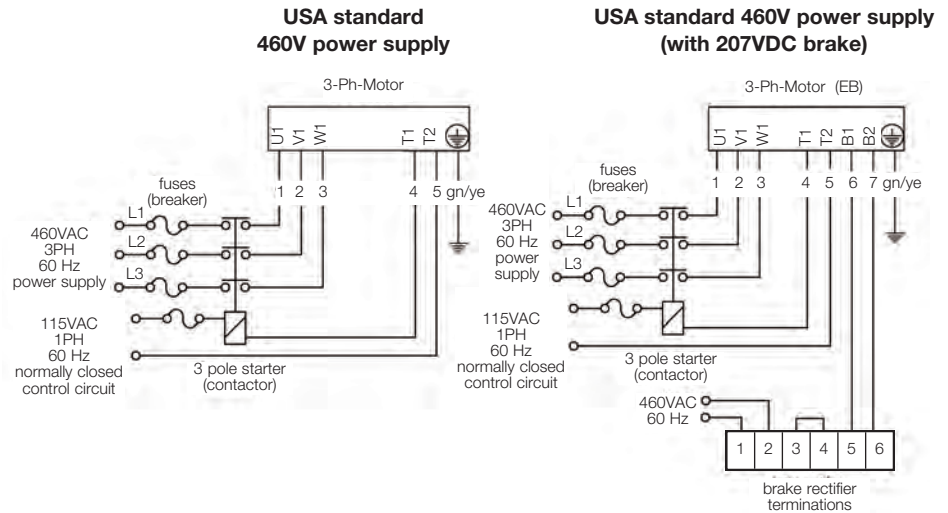



Precautions for Design, Installation and Maintenance

34) Connection Diagrams for Motorized Pulleys


Model 138LS in 3 phase Compact Terminal Box and WAGO-Clamp 0.13 HP - 1.0 HP

T1 & T2= Internal bi-metallic thermal protection switch which MUST BE CONNECTED to external normally closed control circuit.

See Technical Precautions pages 80-90 for complete electrical design, installation, and maintenance instructions.


For two speed motor details contact Rulmeca.

- RD = Red
- YE = Yellow
- BK = Black
- GY = Grey
- BU = Blue
- GN = Green
- BN = Brown
- T1 & T2= Thermal Protector




Assembly instructions

USA standard 460V power supply

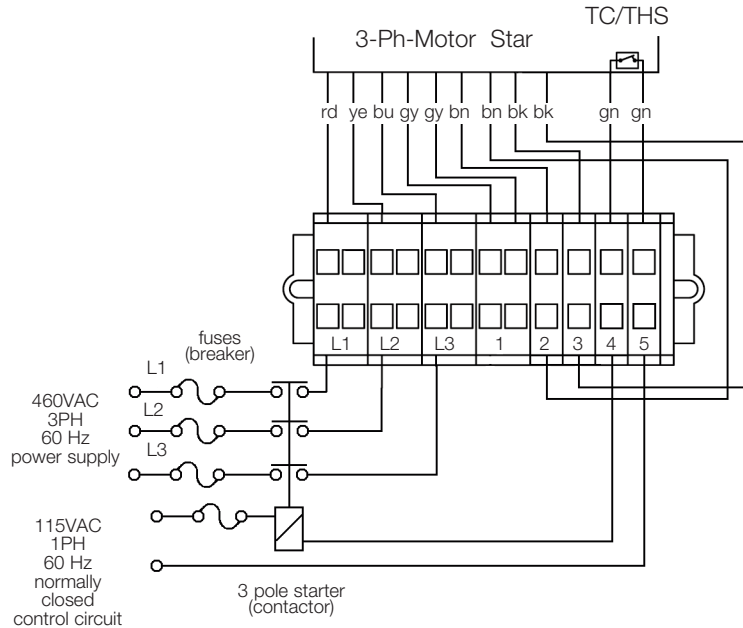

USA standard 230V power supply

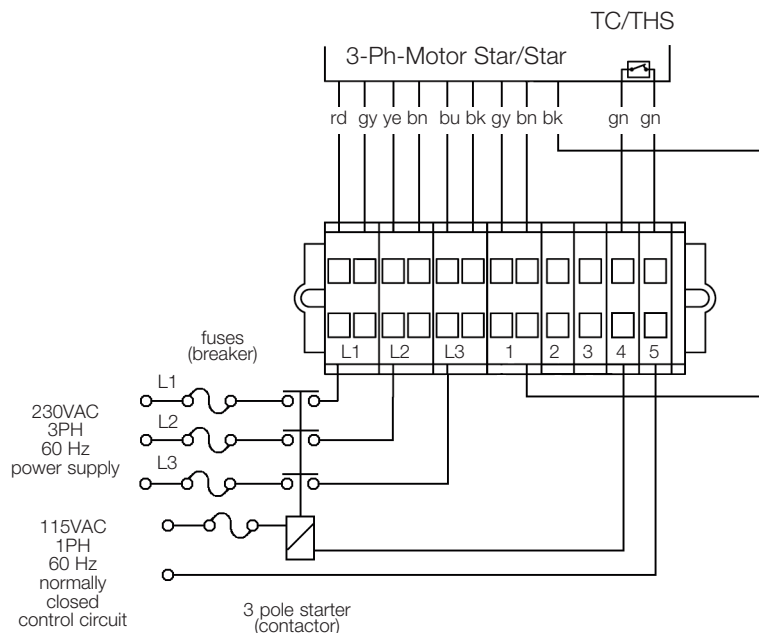



Precautions for Design, Installation and Maintenance

34) Connection Diagrams for Motorized Pulleys

Model 138LS in 1 phase Compact Terminal Box and WAGO-Clamp 0.13 HP - 0.75 HP


Diagrams are valid for Motorized Pulleys manufactured after January 2011. For units built prior to this date contact Rulmeca or refer to Repair and Maintenance Guide available at sales-us@rulmeca.com.

T1 & T2= Internal bi-metallic thermal protection switch which **MUST BE CONNECTED** to external normally closed control circuit.

See Technical Precautions pages 80-90 for complete electrical design, installation, and maintenance instructions.


For two speed motor details contact Rulmeca.

- RD = Red
- YE = Yellow
- BK = Black
- GY = Grey
- BU = Blue
- GN = Green
- BN = Brown
- T1 & T2= Thermal Protector




Assembly instructions

Single Phase power supply (clockwise rotation)

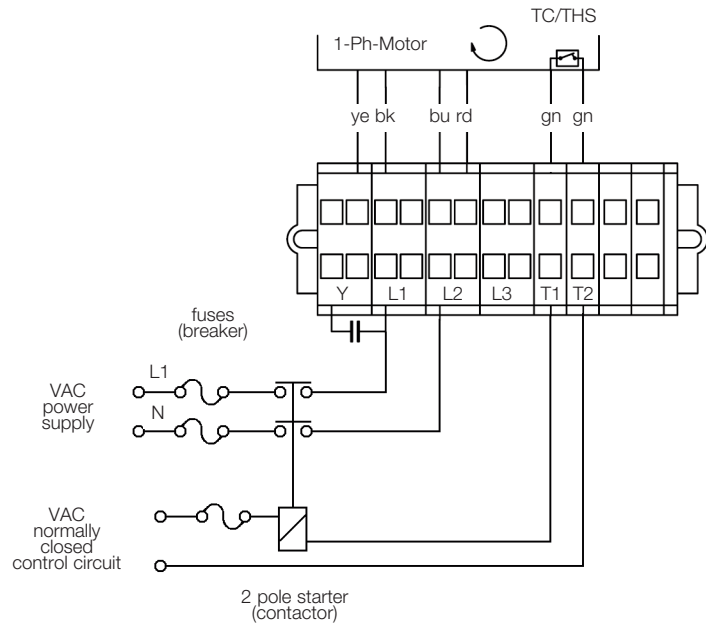

Single Phase power supply (counterclockwise rotation)

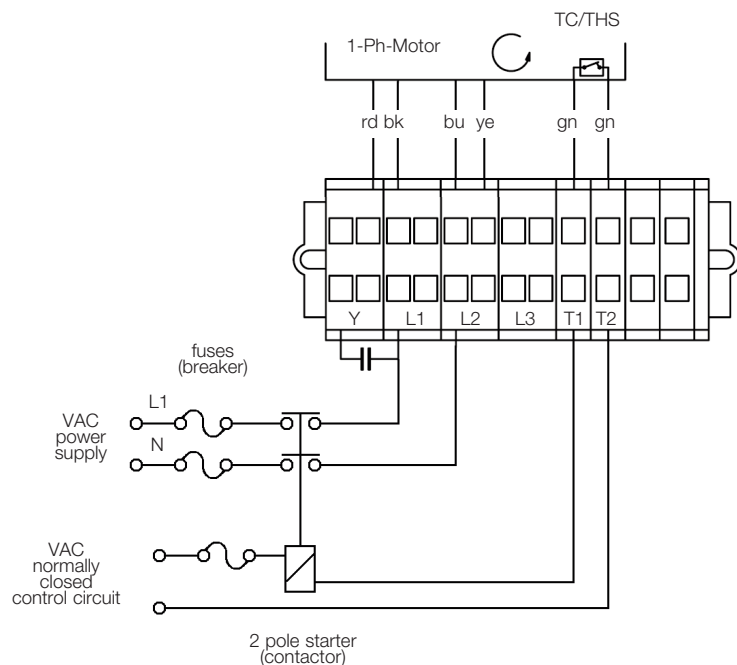



Precautions for Design, Installation and Maintenance

34) Connection Diagrams for Motorized Pulleys

Standard Terminal Box w/o brake
0.5 HP - 330 HP

Standard Terminal Box with brake
0.5 HP - 20 HP

Diagrams are valid for Motorized Pulleys manufactured after January 2011. For units built prior to this date contact Rulmeca or refer to Repair and Maintenance Guide available at sales-us@rulmeca.com.


T1 & T2= Internal bi-metallic thermal protection switch which MUST BE CONNECTED to external normally closed control circuit.

See Technical Precautions pages 80-90 for complete electrical design, installation, and maintenance instructions.


Brake rectifier is shown with jumper across terminals 3 and 4. This enables AC power supply to rectifier to stop and start brake. Brake responsiveness may be improved by connecting an external switch to terminals 3 and 4.

Internal electromagnetic brake is available in models 220M - 500M.

Non-USA power supply without brake

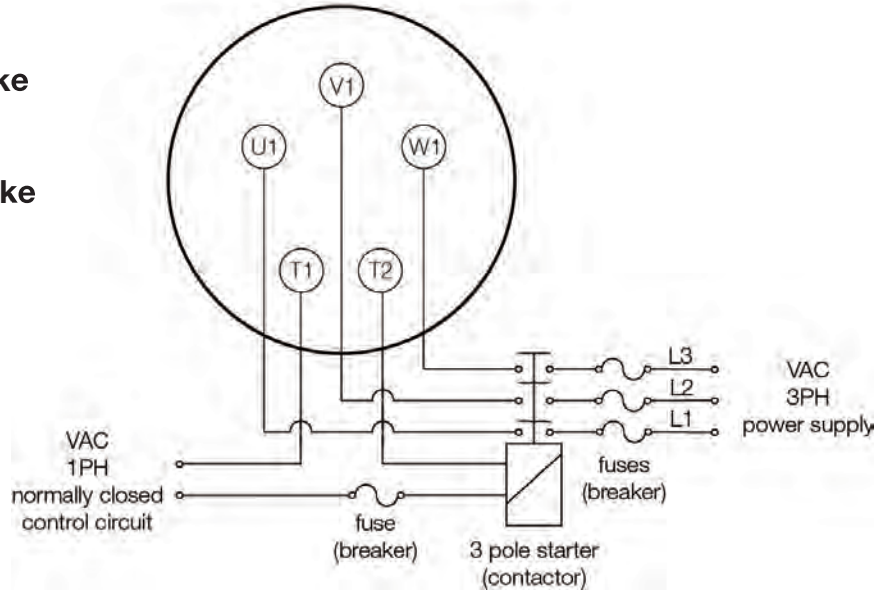

Non-USA power supply with brake

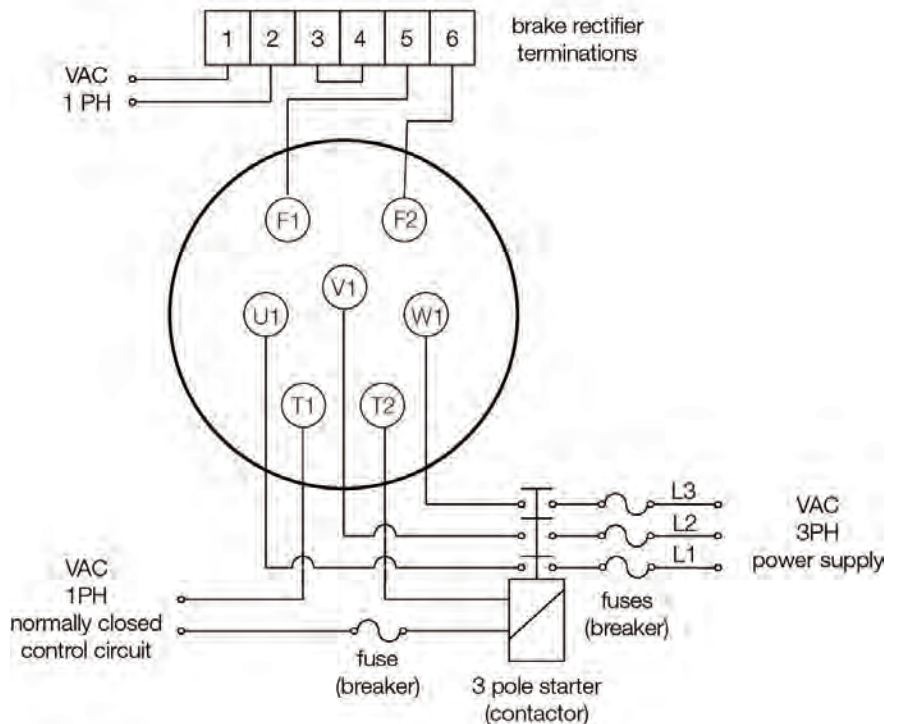



Precautions for Design, Installation and Maintenance

34) Connection Diagram for Motorized Pulleys 500H - 800HD

Internal Anti-condensation Heating Element

Trickle Voltage Heating

Terminals H1 & H2 for the anti-condensation heating element are live during Motorized Pulley stoppage.

Terminals T1 & T2 for thermal protection switch which **MUST BE CONNECTED** to external normally closed control circuit.

Trickle heater relay may only be switched on when motor switch is off and motor speed is zero for 5 seconds.

Motor relay may only be switched on when heater is off for 5 seconds.


“Dry type” (two winding) transformer maximum secondary voltage is 10% of nominal voltage. Transformer should have +/- 5% and +/- 10% primary voltage control knobs for final voltage adjustment.

Winding fuse maximum is 25% of nominal amps.

Refer to local electrical service company for recommended transformer rating and transformer use.


See Technical Precautions pages 80-90 for complete electrical design, installation, and maintenance instructions.

Internal Anti-condensation Heating Element

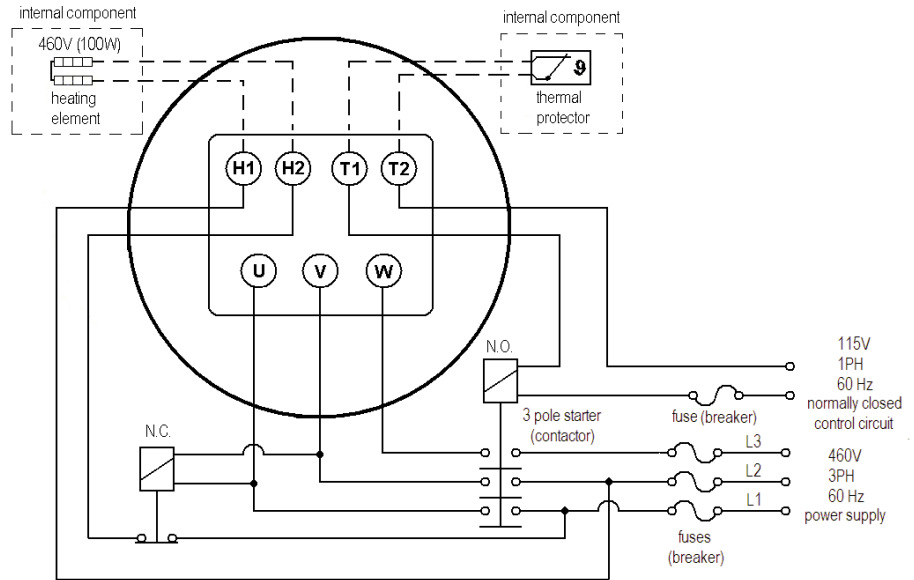

Anti-condensation heating element must be connected in such a way that it is turned off during motor operation.

Trickle Voltage Heating

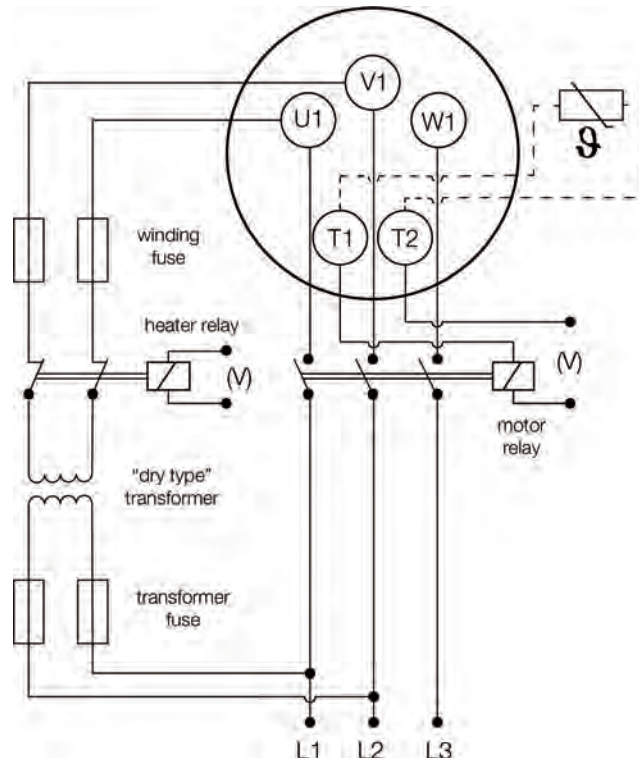



Precautions for Design, Installation and Maintenance

34) Connection Diagram for Motorized Pulleys

630H-800HD with optional thermal monitoring sensors and thermal protection switches

Terminals T1 & T2 for thermal protection switch **MUST BE CONNECTED** to external normally closed control circuit.

Terminals P1 & P2 for internal temperature sensor (either PT100 or PTC) must be connected to appropriate control architecture.


1000H - 1000HD with standard thermal monitoring sensors and thermal protection switches

Terminals T1 & T2 for thermal protection switch **MUST BE CONNECTED** to external normally closed control circuit.


This model is also available with optional built-in heating elements upon request.

See Technical Precautions pages 80-90 for complete electrical design, installation, and maintenance instructions.

Models 630H - 800HD
USA standard 460V power supply

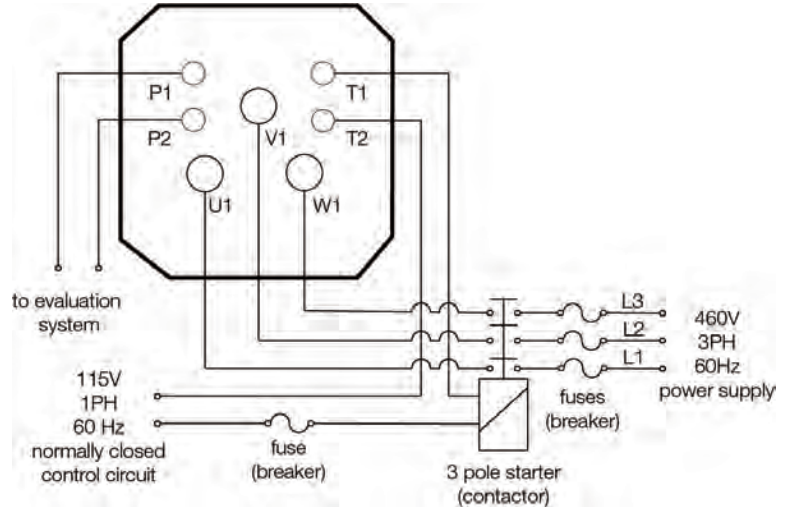

Models 1000H - 1000HD
USA standard 460V power supply

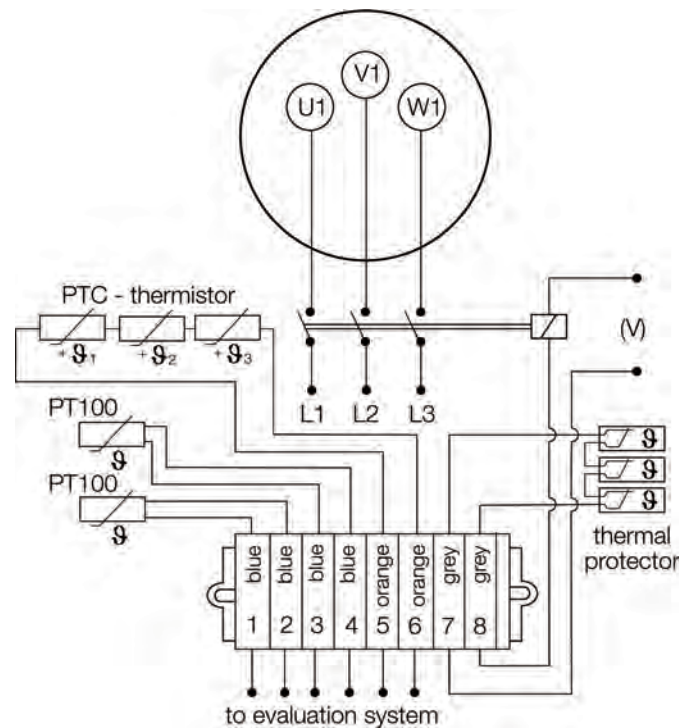



Close to you!

**Global presence, local service,
local consulting, local assembly**

Rulmecca Motorized Pulley People are near you whenever you need us. We speak your language and understand your needs.

Rulmecca Corporation
3200 Corporate Drive, Ste. D
Wilmington, NC 28405
910-794-9294
sales-us@rulmecca.com
www.rulmecacorp.com

